

Project Address:


Civic Address  
50 Government St  
Victoria, BC

Legal Address Description:  
Property ID: 007-326-122  
Legal Amended Lot 9, Beckley Farm, Victoria District,  
Plan 229

Owner:

Oeza Developments  
1558 Beach Dr.  
Victoria, BC

Contact:  
Mike Jones  
mike.jones@oezadevelopments.ca  
250-588-1960

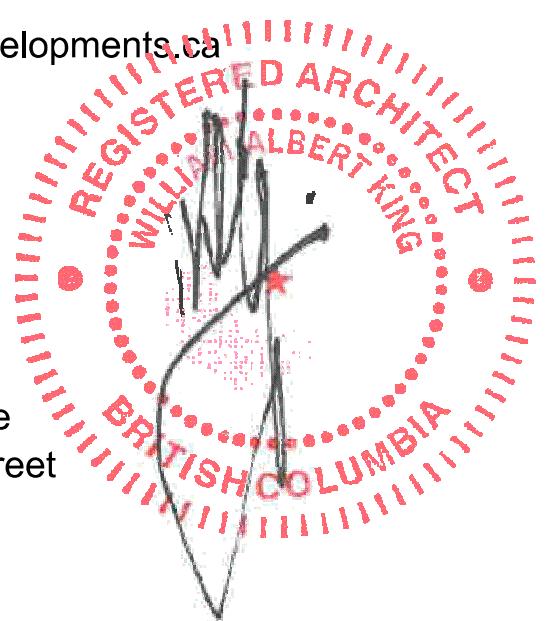

Architect

Waymark Architecture  
1826 Government Street  
Victoria BC V8T 4N5

Contact: Will King  
Phone: 778 977 0660  
Email: will@waymarkarchitecture.com

Structural Engineer

RJC Engineers  
#330, 1515 Douglas St  
Victoria BC V8W 2G4

Contact: Leon Plett  
Phone: 250 386 7794  
Email: lplett@rjc.ca

Landscape

G | ALA Gauthier + Associates Landscaping  
308 877 Hastings St  
Vancouver, BC

Contact: Bryce Gauthier  
Phone: 604 317 9682  
Email: bryce@gauthierla.com

Code Consultant





Celerity Engineering Limited  
102-5166 Cordova Bay Road  
Victoria, BC V8Y 2K6

Contact: Corie Lubben  
Phone: 250 410 2021 extension 205  
Email: clubben@celerity.ca

Civil Engineer

McElhanney  
3960 Quadra St #500  
Victoria, BC V8X 4A3


Contact: Nathan Dunlop  
Phone: 778 746 7417  
Email: ndunlop@mcelhanney.com

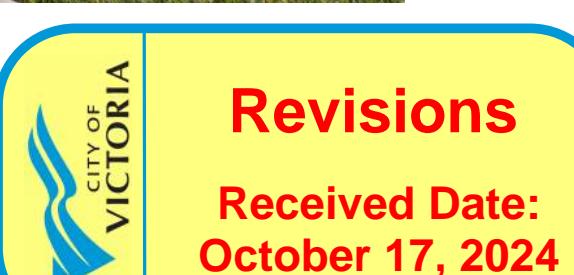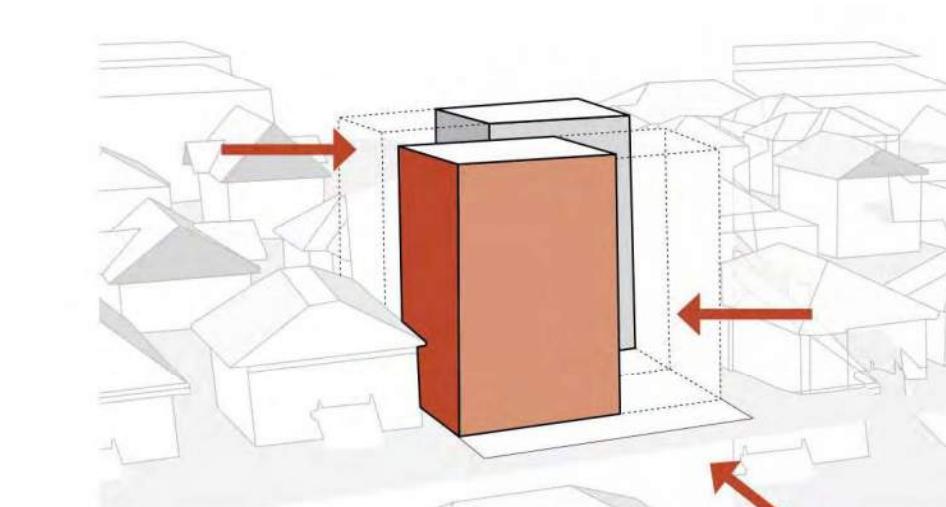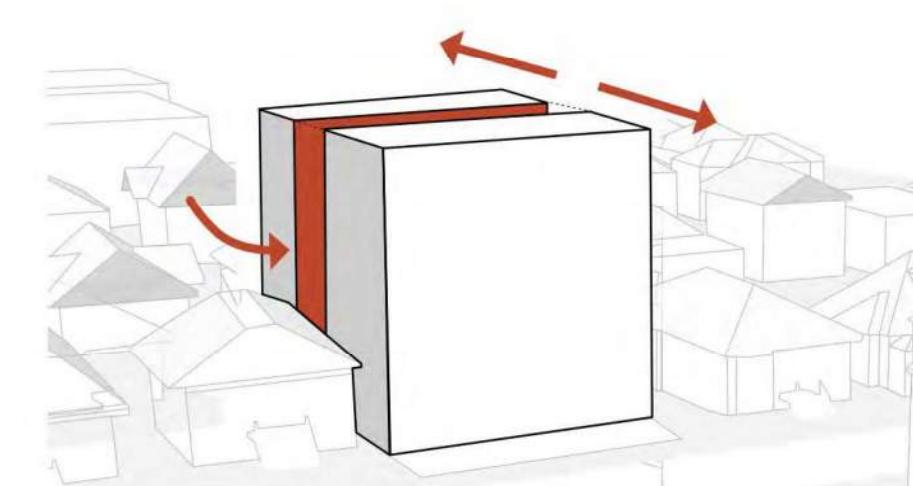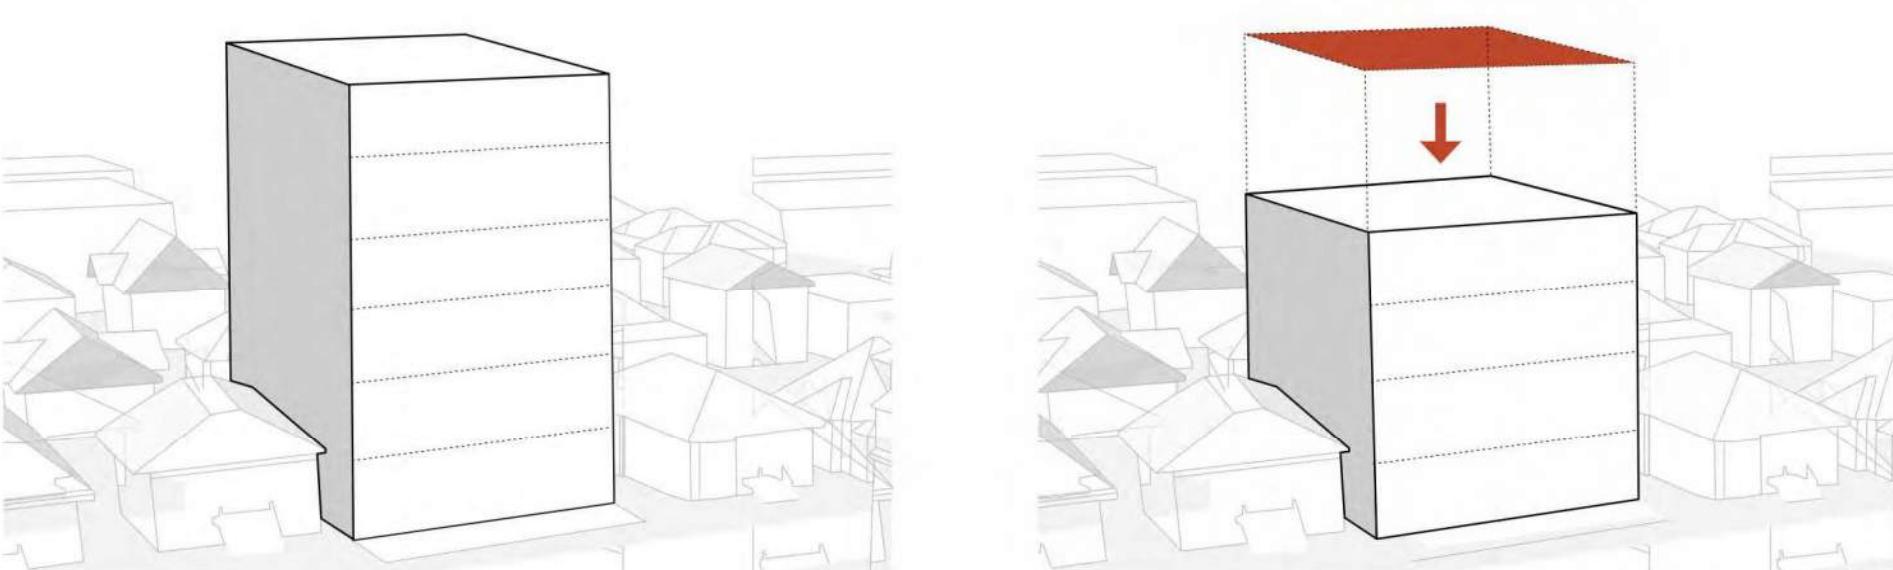

CODE ANALYSIS		BCBC REFERENCE
2018 BC building code, data matrix part 3		References are to division B unless noted [A] for division A or [C] for division C.
Project Description: New Construction		
Major Occupancy: Residential group C	3.1.2.1	
Building area: 114.3 m <sup>2</sup>	14.1.2 [A]	
Number of stories: 5 (4 story + loft)	3.2.1.1	
Number of streets/fire fighter access: 1	3.2.2.10	
Principal building is classified as following:		
3.2.2.50. Group C, up to 6 Storeys, Sprinklered		
The building is permitted to be of combustible construction or noncombustible construction used singly or in combination	3.2.2.50.	
Floor assemblies shall be fire separations with a fire-resistance rating not less than 1 h	3.2.2.50.	
Roof assemblies shall have a fire-resistance rating not less than 1 h	3.2.2.50.	
Adjacent Occupancies: C		
Sprinklered : Yes	3.2.2.50.	
Fire alarm: Yes	3.2.4.	
Standpipe required: Yes	3.2.9.	
Water service/supply is adequate: Yes	3.2.5.7	
Mezzanine area : N/A		
Occupant load based on: m <sup>2</sup> /person and design of building The occupant load for residential suites is two persons per sleeping room.		
1st floor = 8 persons (4 studio suites) 2nd floor = 10 persons (2 studio suites, 3 1-bedroom units) 3rd floor = 10 persons (2 studio suites, 3 1-bedroom units) 4th floor & loft = 10 persons (2 2-bedroom+den units)	3.1.17.1	
For storage garage: occupant load = garage area / 46 (sm/person) (Car + bike) parking: 35+41.6 = 76.6 m <sup>2</sup> / 46 m <sup>2</sup> = 1.6 (2 persons) Total occupancy = 42 persons		
Minimum number of exits per unit required: 2, proposed 2	3.4.2.1-2 (b)	
Minimum number of exits for loft, required: 2, proposed 1. Egress will be addressed under an Alternative Solution (AS). Acknowledging that the Vancouver Building Bylaw permits a single exit from a two-storey dwelling unit where the maximum travel distance is not more than 18 m. This proposal will account for this exit distance.	Vancouver Building Bylaw	
The exit stair will be protected by dedicated sprinkler heads. Compliance will be achieved and addressed through an Alternative Solution (AS).		
The corridor between the two halves of the building will be considered an interior corridor even though it is open at both ends. These interior corridor walls will be constructed as fire separations with a minimum 1 h fire-resistance rating.	3.3.1.4.(3)	

Spatial separation - construction of exterior walls - Table 3.2.3.1.D.								
Wall	Area of EBF (m <sup>2</sup> )	L.D (m)	L/H	Permitted max % of openings	Proposed max % of openings	FRR (hours)	Type of construction	Type of cladding
North	442.33	1.36	-	14	5.28	1 H	Combustible or noncombustible	Noncombustible
South	446.02	1.36	-	14	4.79	1 H	Combustible or noncombustible	Noncombustible
West- Rear	217.27	2.74	-	21	16.3	1 H	Combustible or noncombustible	Noncombustible
East- Street Front	209.78	10	-	100	24.3	-	Combustible or noncombustible	Combustible or noncombustible

DATA SHEET/ZONING ANALYSIS			
LEGAL DESCRIPTION: Property ID 007-326-122, Lot 9, Beckley Farm, Victoria District, Plan 229			
STREET ADDRESS: 50 Government St			
CURRENT ZONING: R3-2 MULTIPLE DWELLING DISTRICT			
PROPOSED ZONING: SITE SPECIFIC			
SITE AREA: 586.27 m <sup>2</sup>			
BUILDING FOOTPRINT: 332.75 m <sup>2</sup>			
Zoning Criteria	Proposal	Zone Standard (R3-2)	Envisioned by OCP Land Use designation (Urban Residential)
Site Area (m <sup>2</sup> ) (min.)	586.27 m <sup>2</sup>	920 m <sup>2</sup>	
Lot width (m) (min.)	17.07 m		
Total floor area (m <sup>2</sup> ) (max.)	1141.39 m <sup>2</sup>		
Floor Space Ratio	1.94	1.2 to 1	1.2:1 generally, up to 2:1 in strategic locations for the advancement of plan objectives
Unit floor area (m <sup>2</sup> ) (min.)	33.81 m <sup>2</sup>	30	
Avg Grade	17.73 m	n/a	
Building Height (m) (max.)	15.92 m		Low-rise and mid-rise
Storeys (max.)	4 storeys + Loft ( 4.5)	6	Buildings up to approximately six storeys.
Setbacks (m) (min.)			
Front Setback - Street Boundary	5.03 m	10.5 m for, 4 story building 12 m for, 5 story building	
Rear (NW)	2.738 m	1/2 bldg ht (7.49)	
Side (NE)	1.36 m	1/2 bldg ht (7.49)	
Side (SW)	1.36 m	1/2 bldg ht (7.49)	
Total Side Setback	2.72 m	N/A	
Lot Coverage	59.15%	30% - 4 storeys 24% - 5 storeys	
Open site space - lot (%) (min.)	41.94%	30	
Off Street Parking			
Car Parking	1 - Resident 0 - Visitor 1 - Car Share	Schedule C - Other Area - Multiple Dwelling 16 - Resident 2 - Visitor 18 - Total	
Accessible	1	1	
Van accessible	0	1	
Bicycle storage			
Long Term	30*	18	*Bike stalls could be replaced with mobility scooter parking depending on resident's needs.
Short Term Bicycle parking	6	6	
UNIT TYPES			
8 Studio units @ 33.8 to 35.2 m <sup>2</sup>			
6 One Bedroom units @ 66.7 to 69.08 m <sup>2</sup>			
2 Two Bedroom + Den units @152.12 -157.5 m <sup>2</sup>			

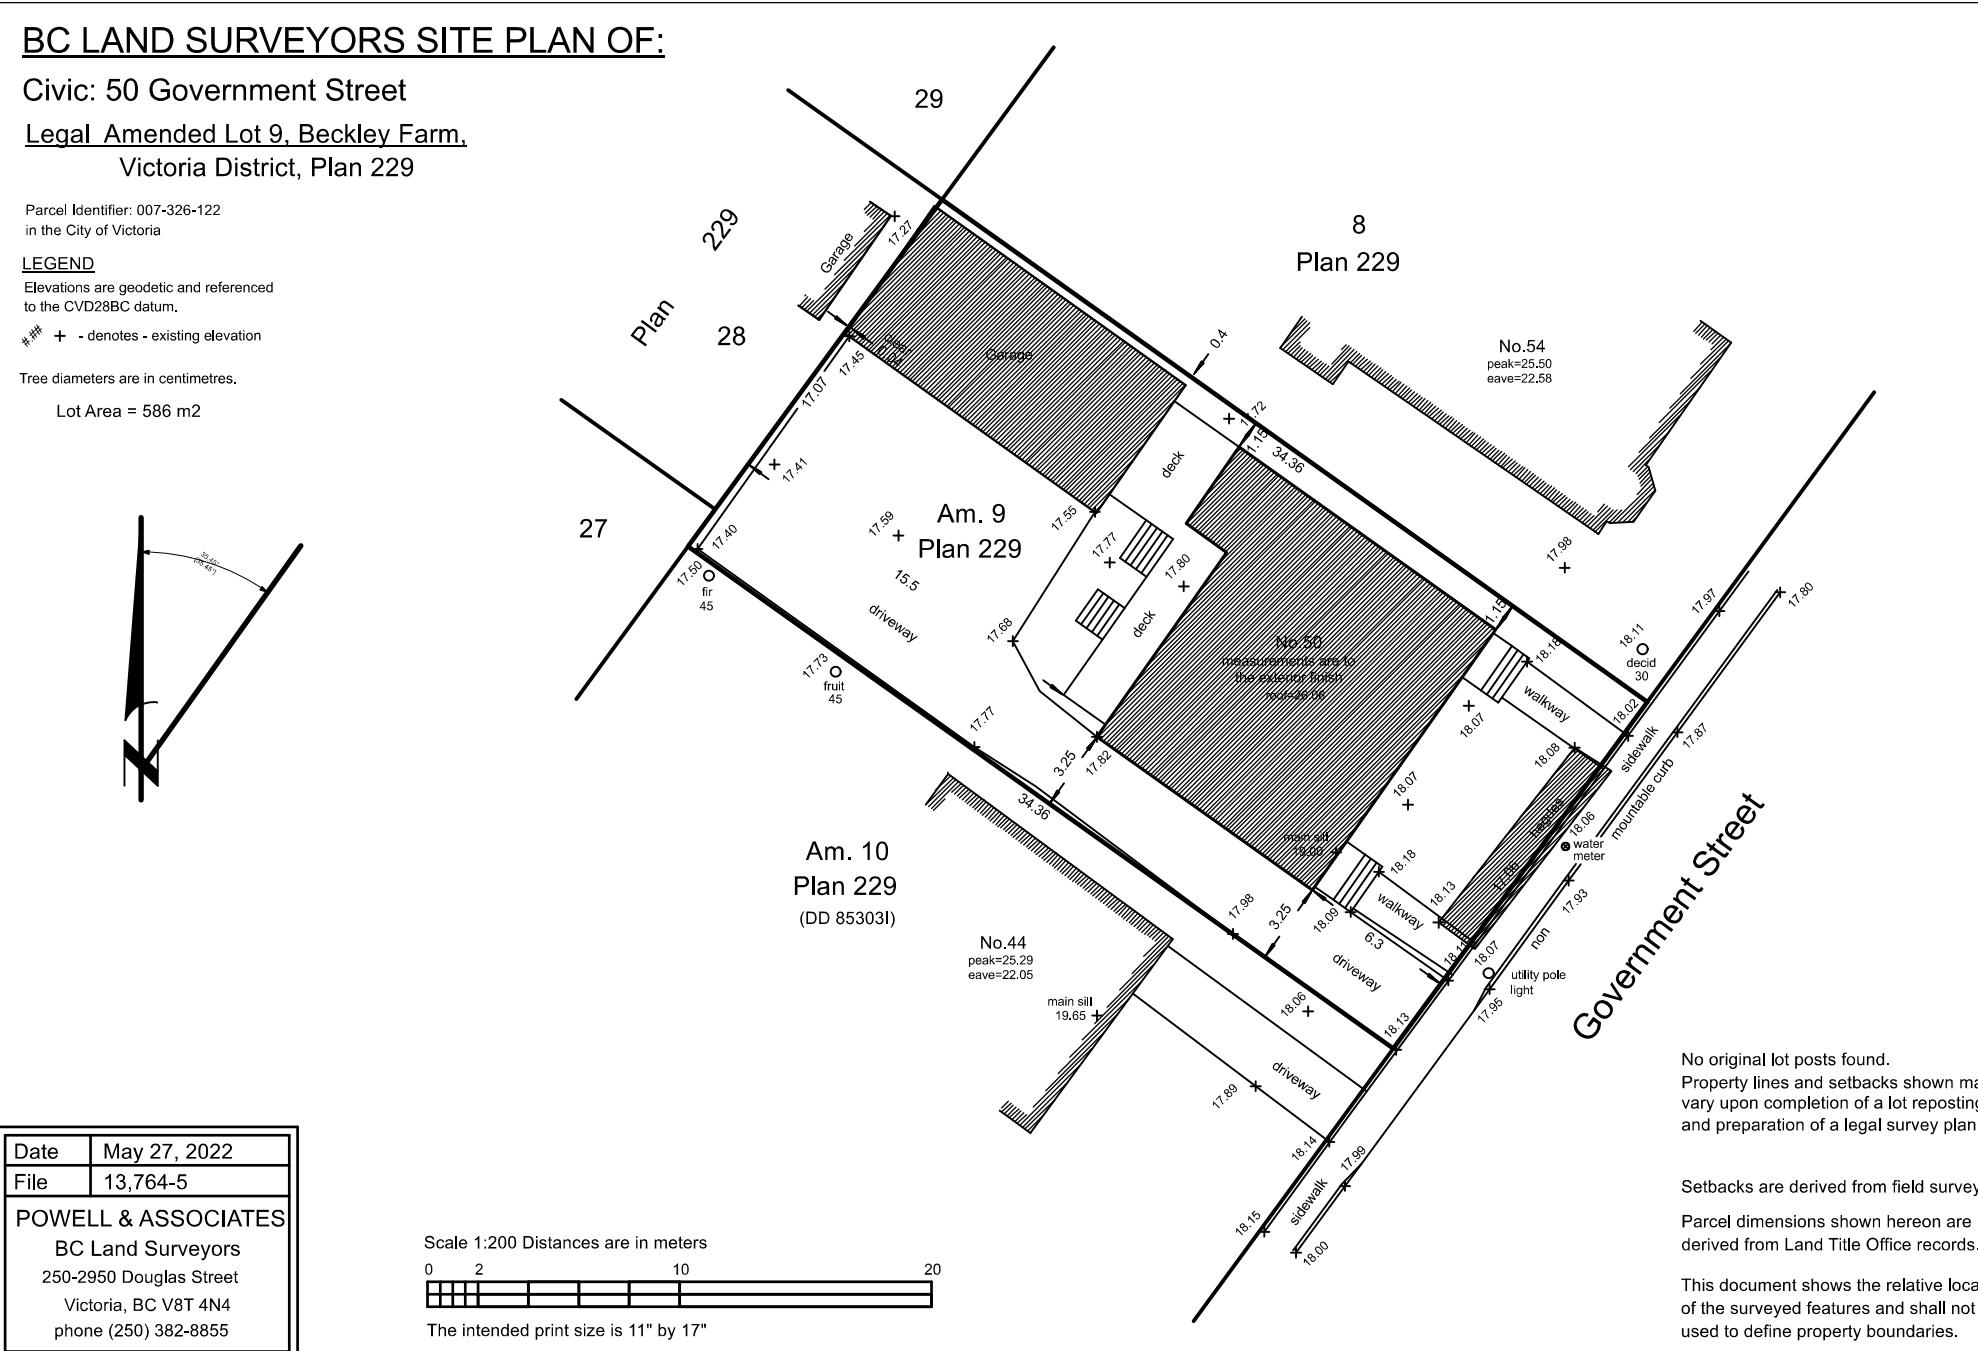

**Parking required for 50 Government:**

0.85 spaces per unit <45 m<sup>2</sup>- 8 (ground floor unit, L2 & L3)  
1.00 space per unit 45>70 m<sup>2</sup> - 6 units (all L2 & L3 units)  
1.45 spaces per unit >70 m<sup>2</sup> - 2 units (both penthouse units)

= (0.85x8) + (1x6) + (1.45x2)  
=15.7=16 car parking spaces

Visitor parking: 0.1 per unit  
= 0.1 x 16  
= 1.6= 2 visitor spaces


Required bikes:  
1.25 per unit >45 m<sup>2</sup>  
1 per unit <45 m<sup>2</sup>  
= (1.25 x 8) + (1x8) = 18  
= 18 bike parking stalls

Visitor bikes required: 6

**PROPOSED:**

1 car share for residents  
1 visitor parking space (also sized for accessible use)

30 bike parking  
14 wall mounted  
16 ground mounted, including 12 regular bike and 4 oversize bike stall (more than 50% of required bike stalls )

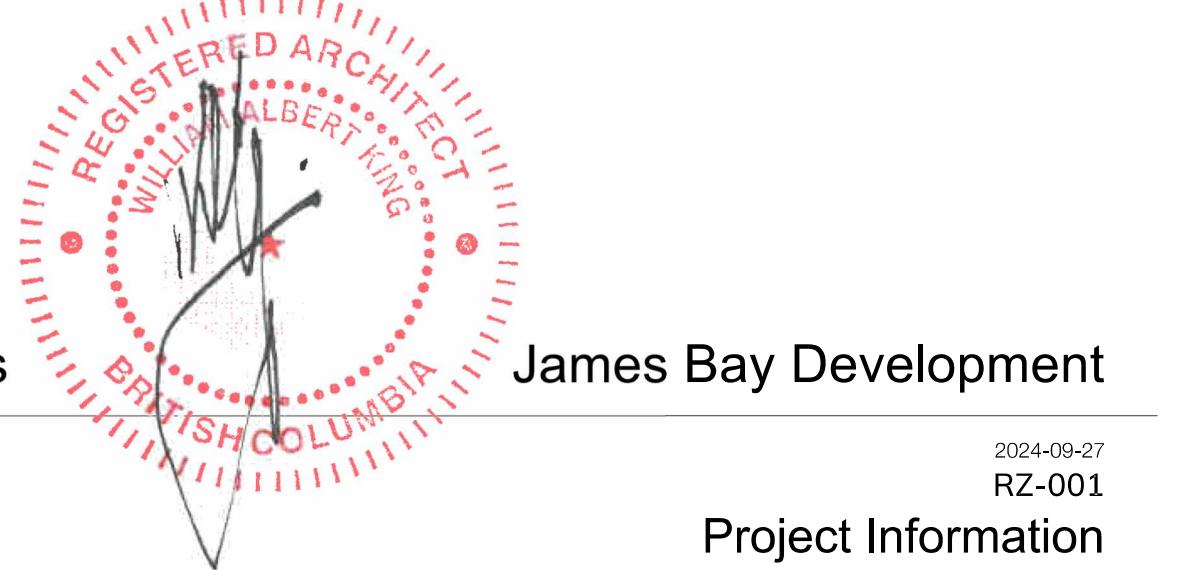

Oeza Developments

James Bay Development



## James Bay Strategic Directions

### Urban Place Designations\*

- Core Inner Harbour/Legislative
- General Employment
- Marine Industrial
- Large Urban Village
- Urban Residential
- Traditional Residential
- Public Facilities, Institutions, Park and Open Space
- Working Harbour
- Marine

- Bus Stop
- Bus route
- Bike lane

- 1 James Bay Village (0.6 km)
- 2 Restaurant (0.5 km)
- 3 Groceries (0.3 km)
- 4 Schools (0.6 km)
- 5 Entertainment (0.4 km)
- 6 Bank (0.5 km)
- 7 Park (0.5 km)

### OCP Policy Objectives Advanced By This Proposal:

6 (a) "...housing growth...within close walking distance of Town Centres and Large Urban Villages."



6 (g) "That all 13 city neighbourhoods contain a range of housing types suitable to people with a mix of incomes, living in a variety of household types, throughout their lives."



6.1.6 "Urban Residential consists primarily of multi-unit residential...including...mid-rise apartments."



6.9 "Give consideration to site-specific amendments to this plan that are consistent with the intent of the Urban Place Designations and that further the broad objectives and policies of the plan, as appropriate to the site context."




6.32.1 "Victoria accommodates a minimum of 20,000 additional residents from 2011 to 2041."




6.32.3 "Victoria accommodates a minimum of 20% of the region's cumulative new dwelling units to 2041."




6.32.5 "A minimum 90% of all dwelling units are within 400 metres either of the Urban Core, a Town Centre or an Urban Village by 2041."

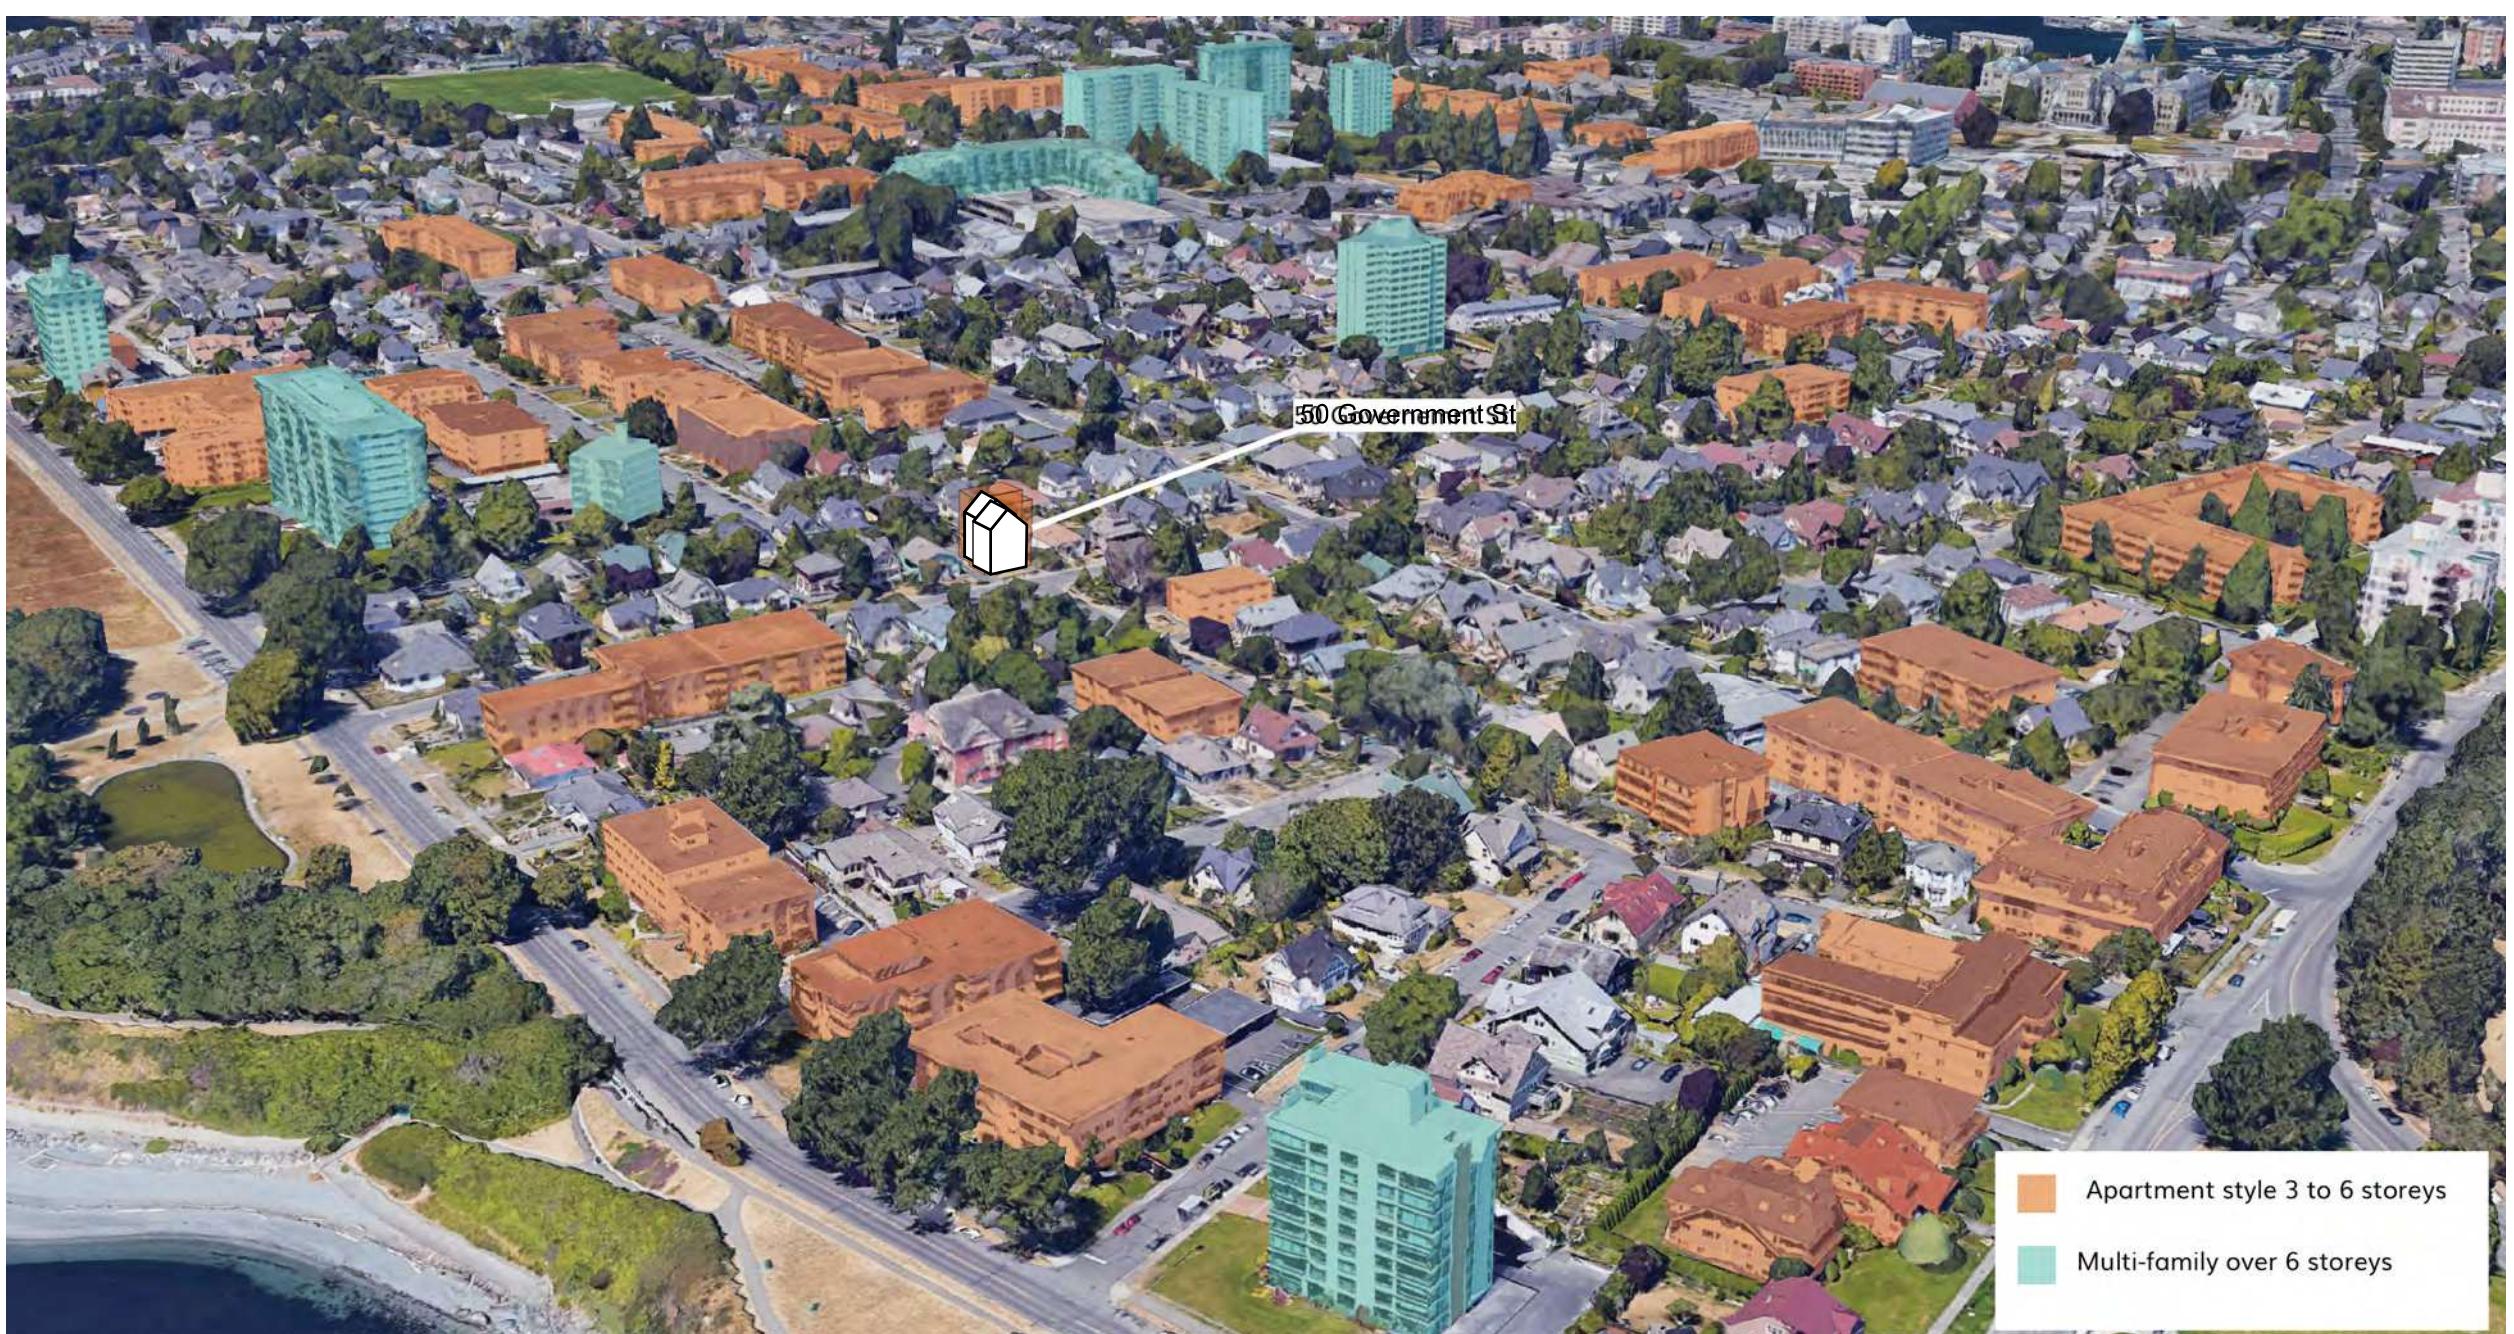


## PREVIOUS PROPOSED DESIGN

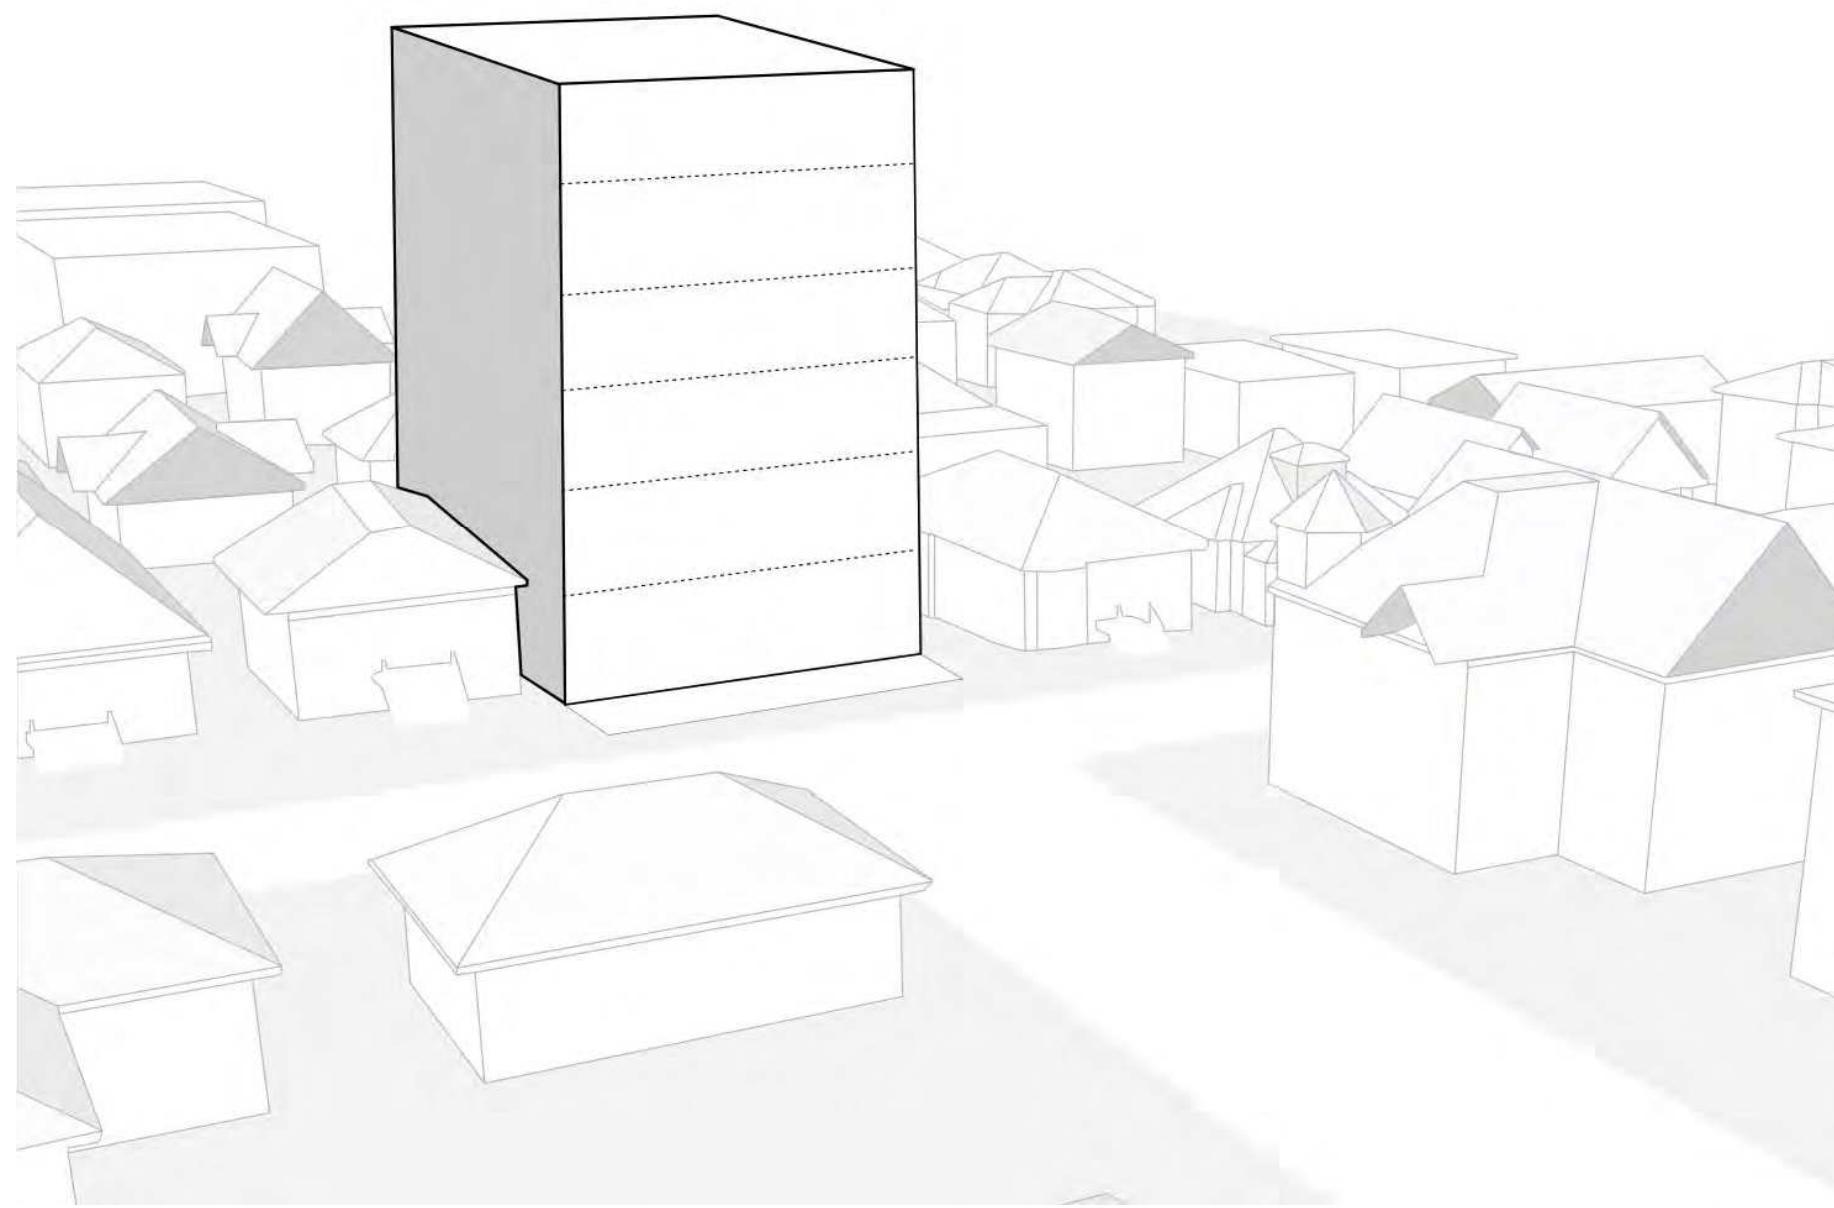

# REDUCTION TO A 4-STORY BUILDING

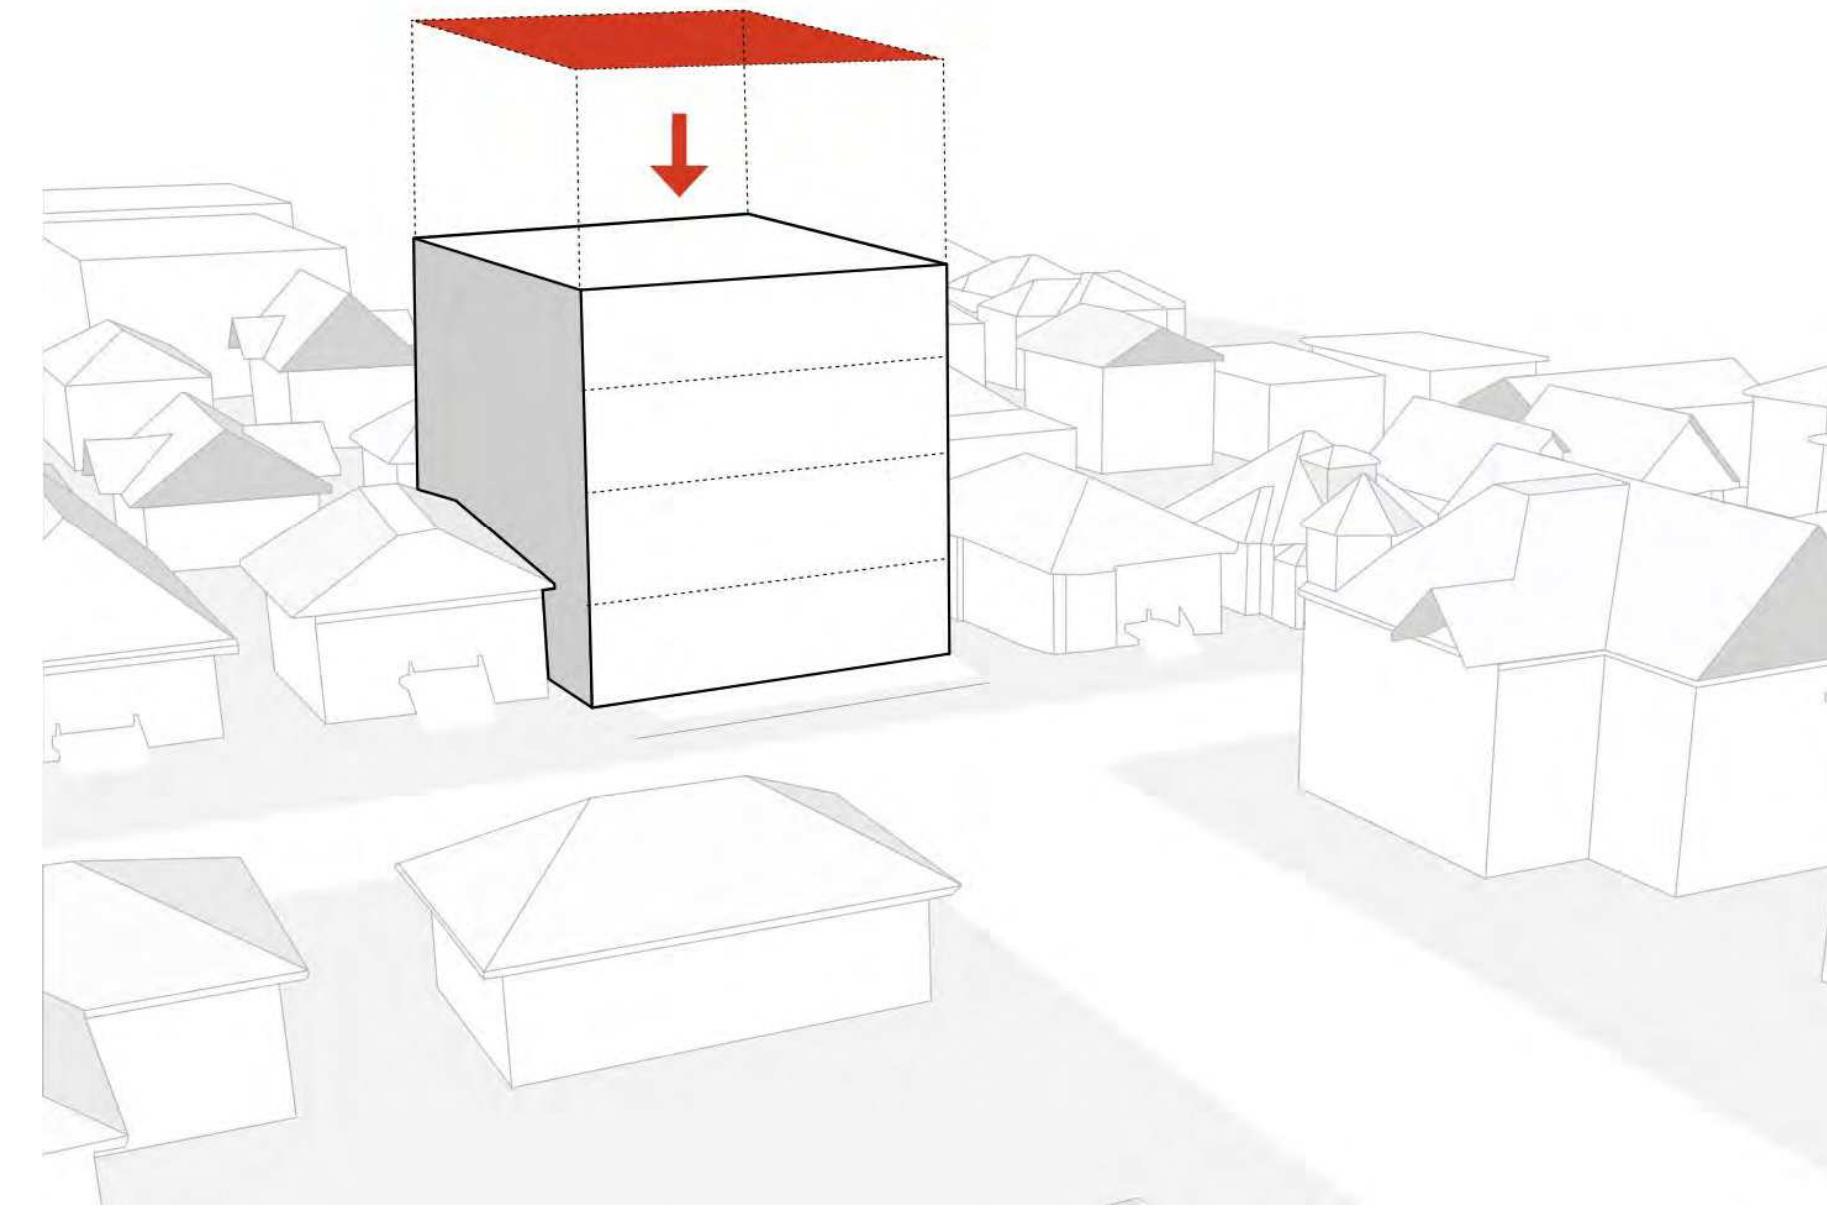

## DIVIDED INTO TWO, FOCUSING ON CENTRAL AXIS

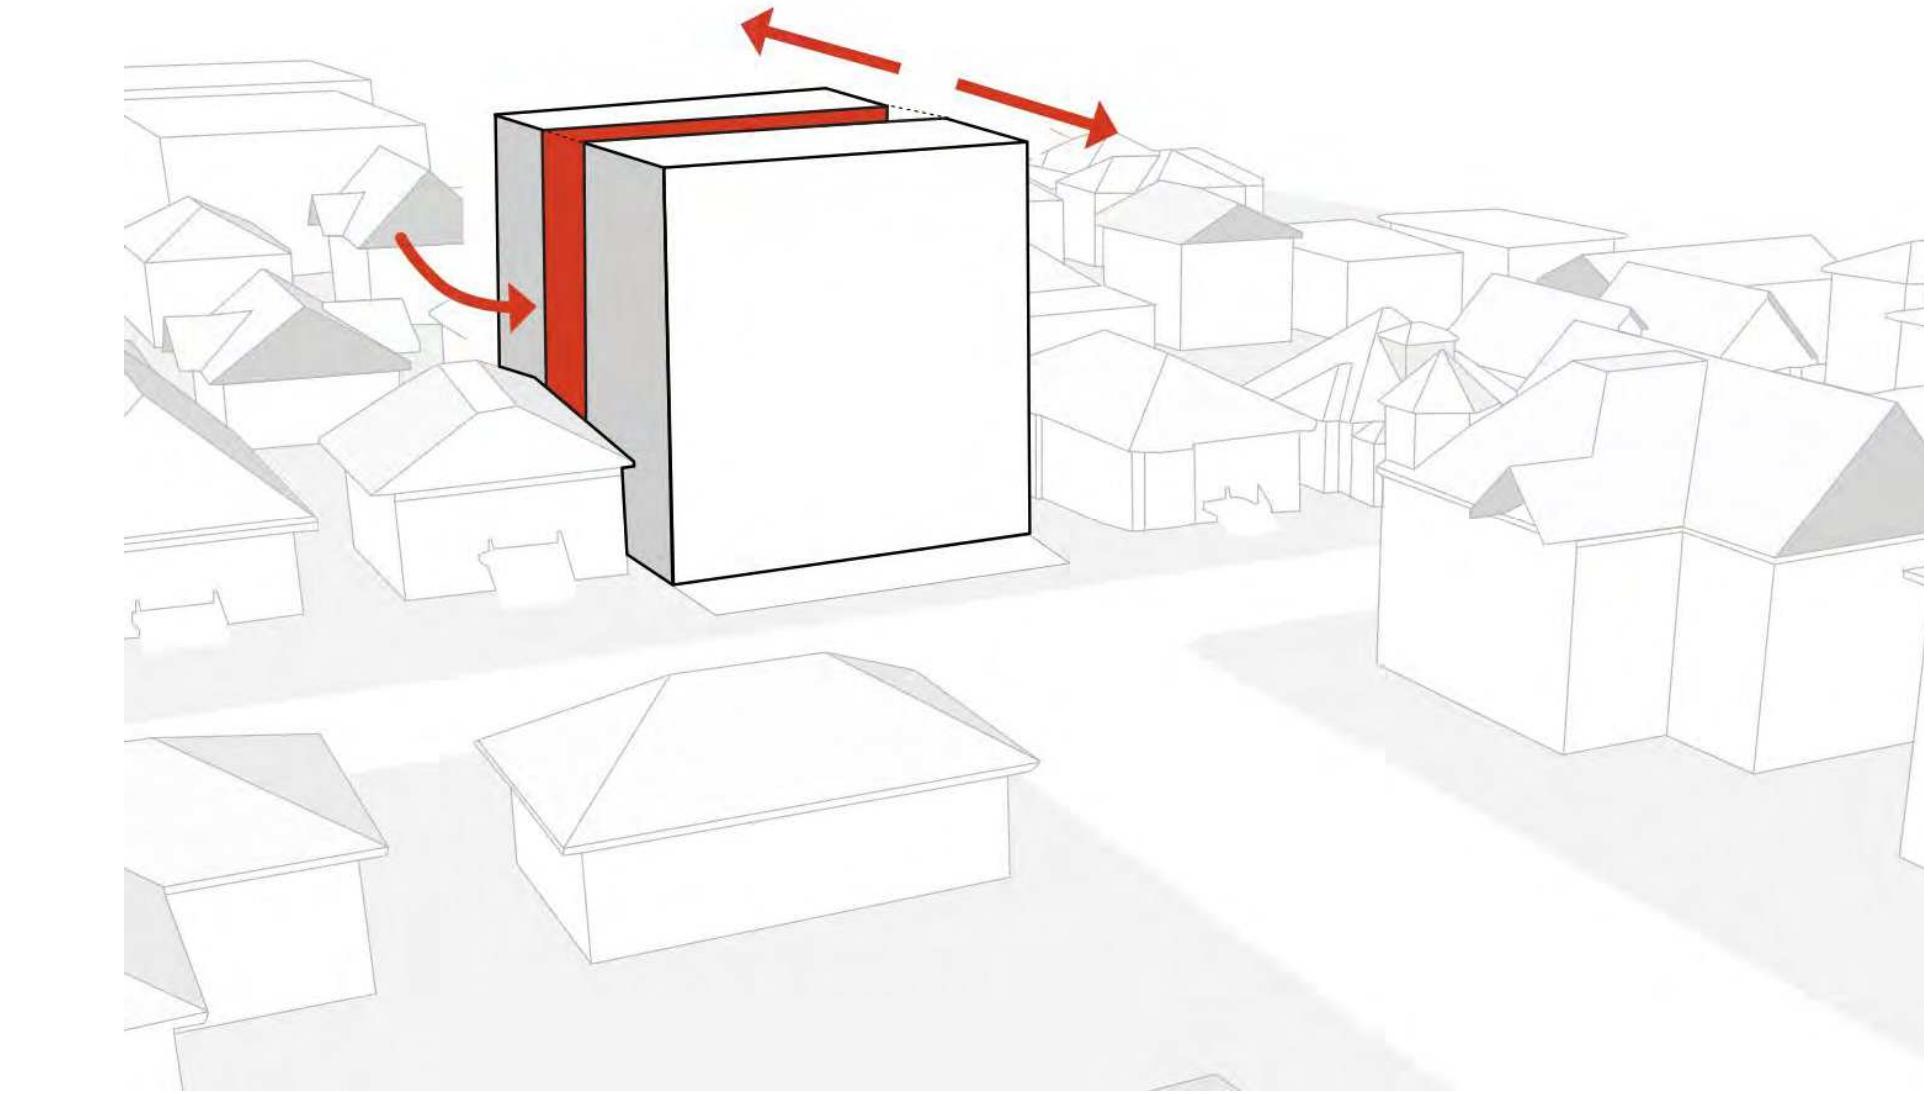


STEP 1 → HEIGHT →

- 6 (G) "That all.... neighbourhoods contain a range of housing... (OCP)
- 3.10 Overhangs and canopies are encouraged... (DG)
- 5.1 Open spaces should be usable, attractive and well integrated with the design of the building. (DG)

```
graph LR; A[STEP 2] --> B[FAMILY ORIENTED]; B --> C["- 3.6 Individual Well Being: ...ensure that all residents have secure access to basic needs... required to flourish. (OCP)"]
```


STEP 2 → FAMILY ORIENTED → - 3.6 Individual Well Being: ...ensure that all residents have secure access to basic needs... required to flourish. (OCP)

# SHIFTED ACCORDING TO SURROUNDINGS

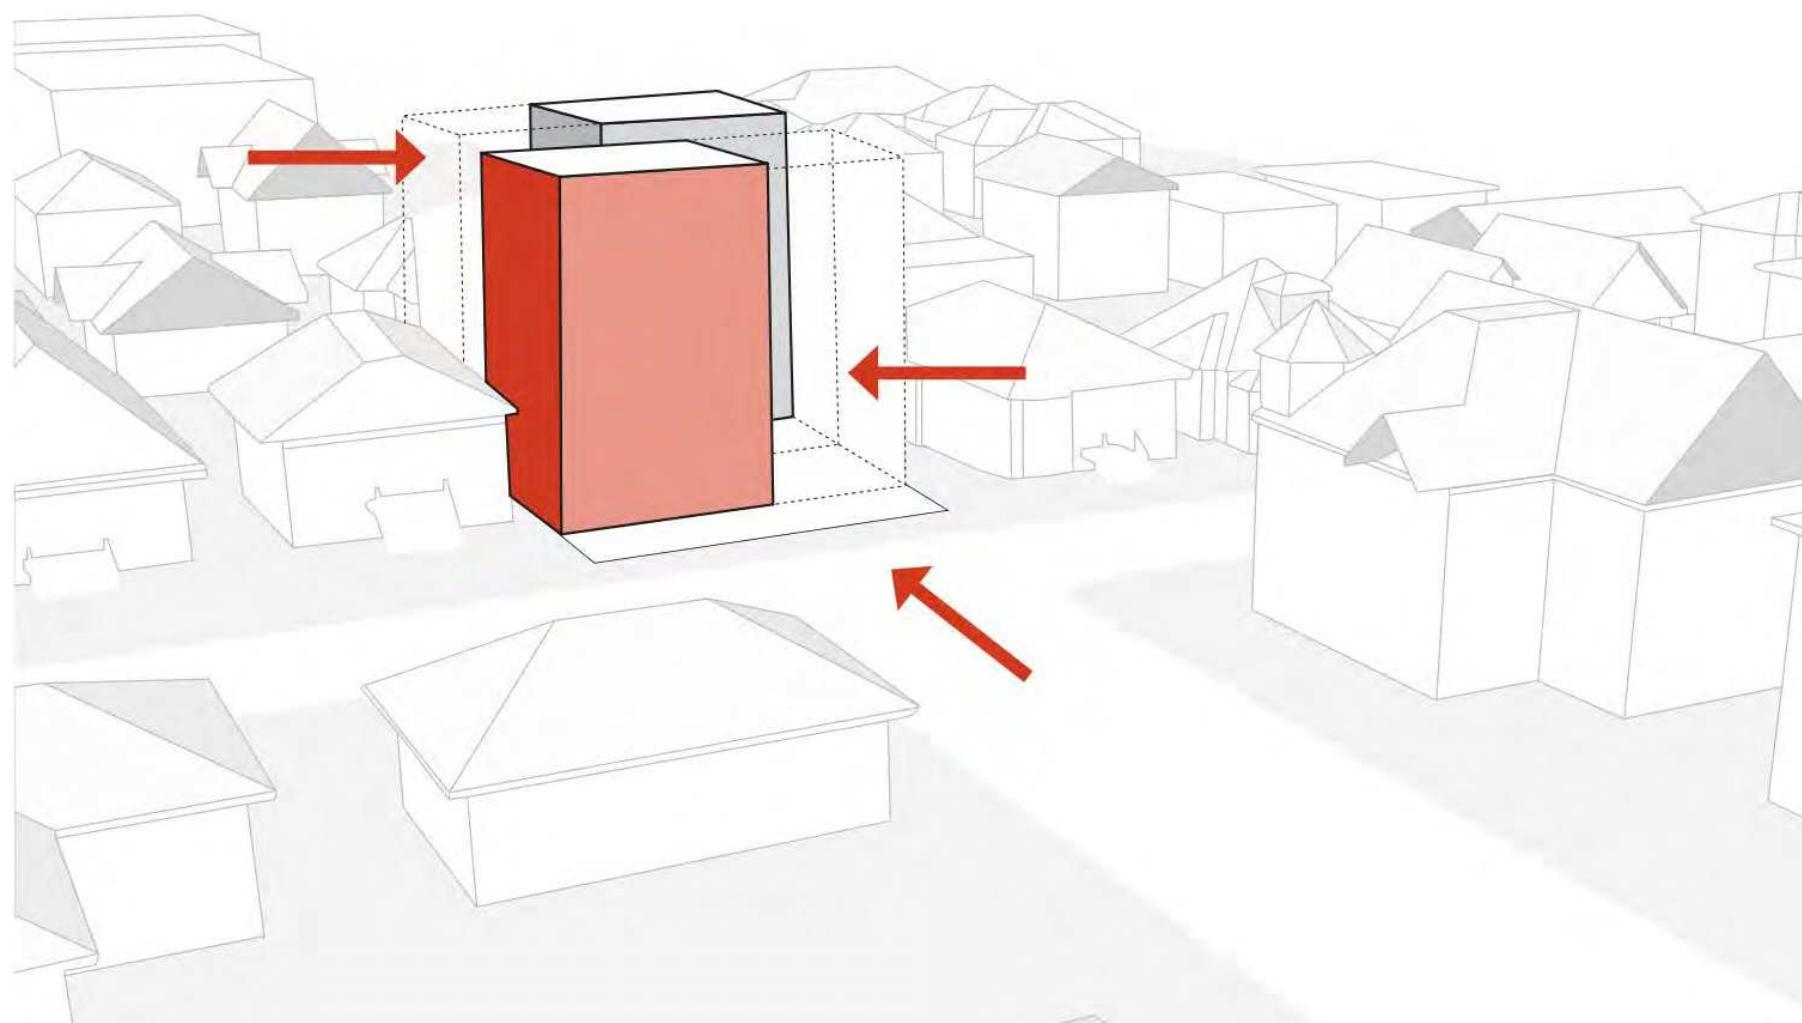

```
graph LR; A[STEP 3] --> B[SETBACKS]; B --> C["- 3.6 Individual Well-Being:  
-Land Management and Development;  
a) Victoria has compact development patterns that use land efficiently.  
-Climate and Energy:  
a) Victoria and Victorians are more resilient to climate change and energy scarcity and costs.  
b) New and existing buildings are energy efficient and produce few greenhouse gas emissions. (OCP)"]
```


# RESIDENTIAL FORM AND CHARACTER

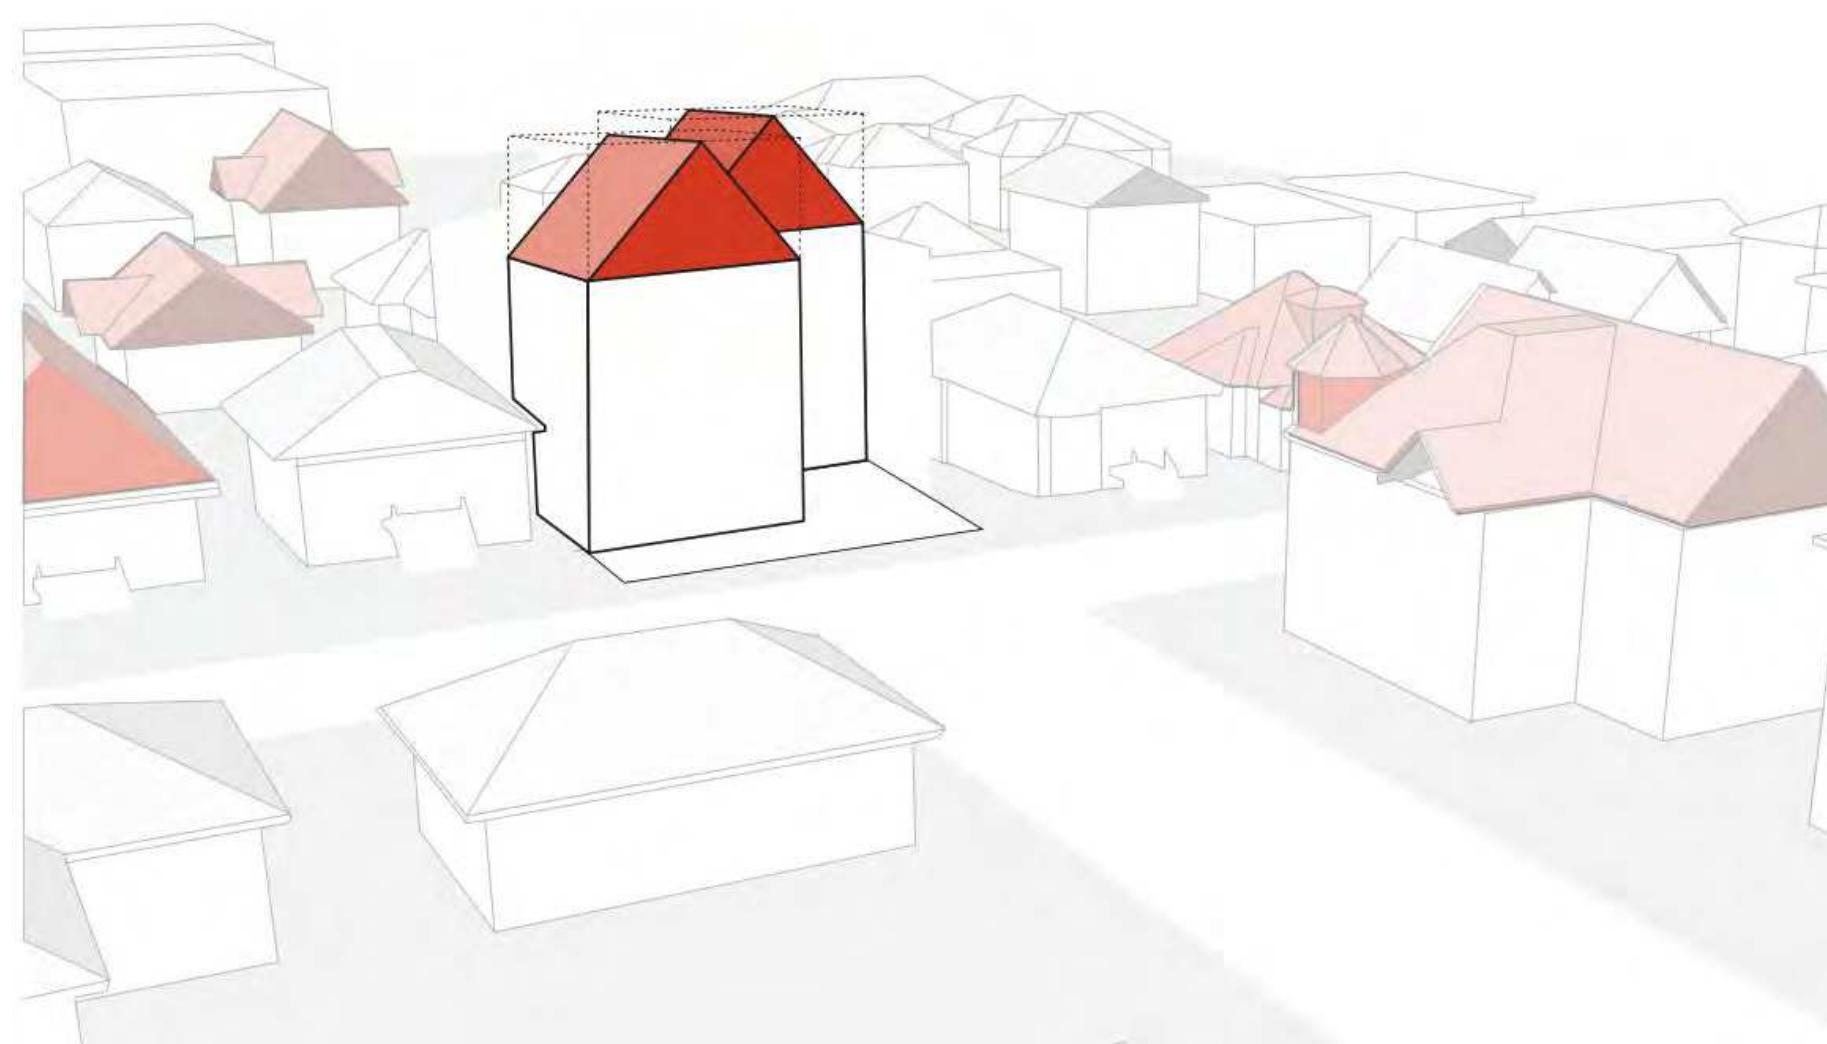

STEP 4 → HARMONY →


- 8.1 ... balance new development and heritage conservation. (OCP)
- 21.16.3 Maintain and interesting diversity of land use housing types and character areas. (OCP)
- 3.3.2 Roof forms should complement the character of buildings in the immediate context. (DG)

## RESULTING PROPOSAL

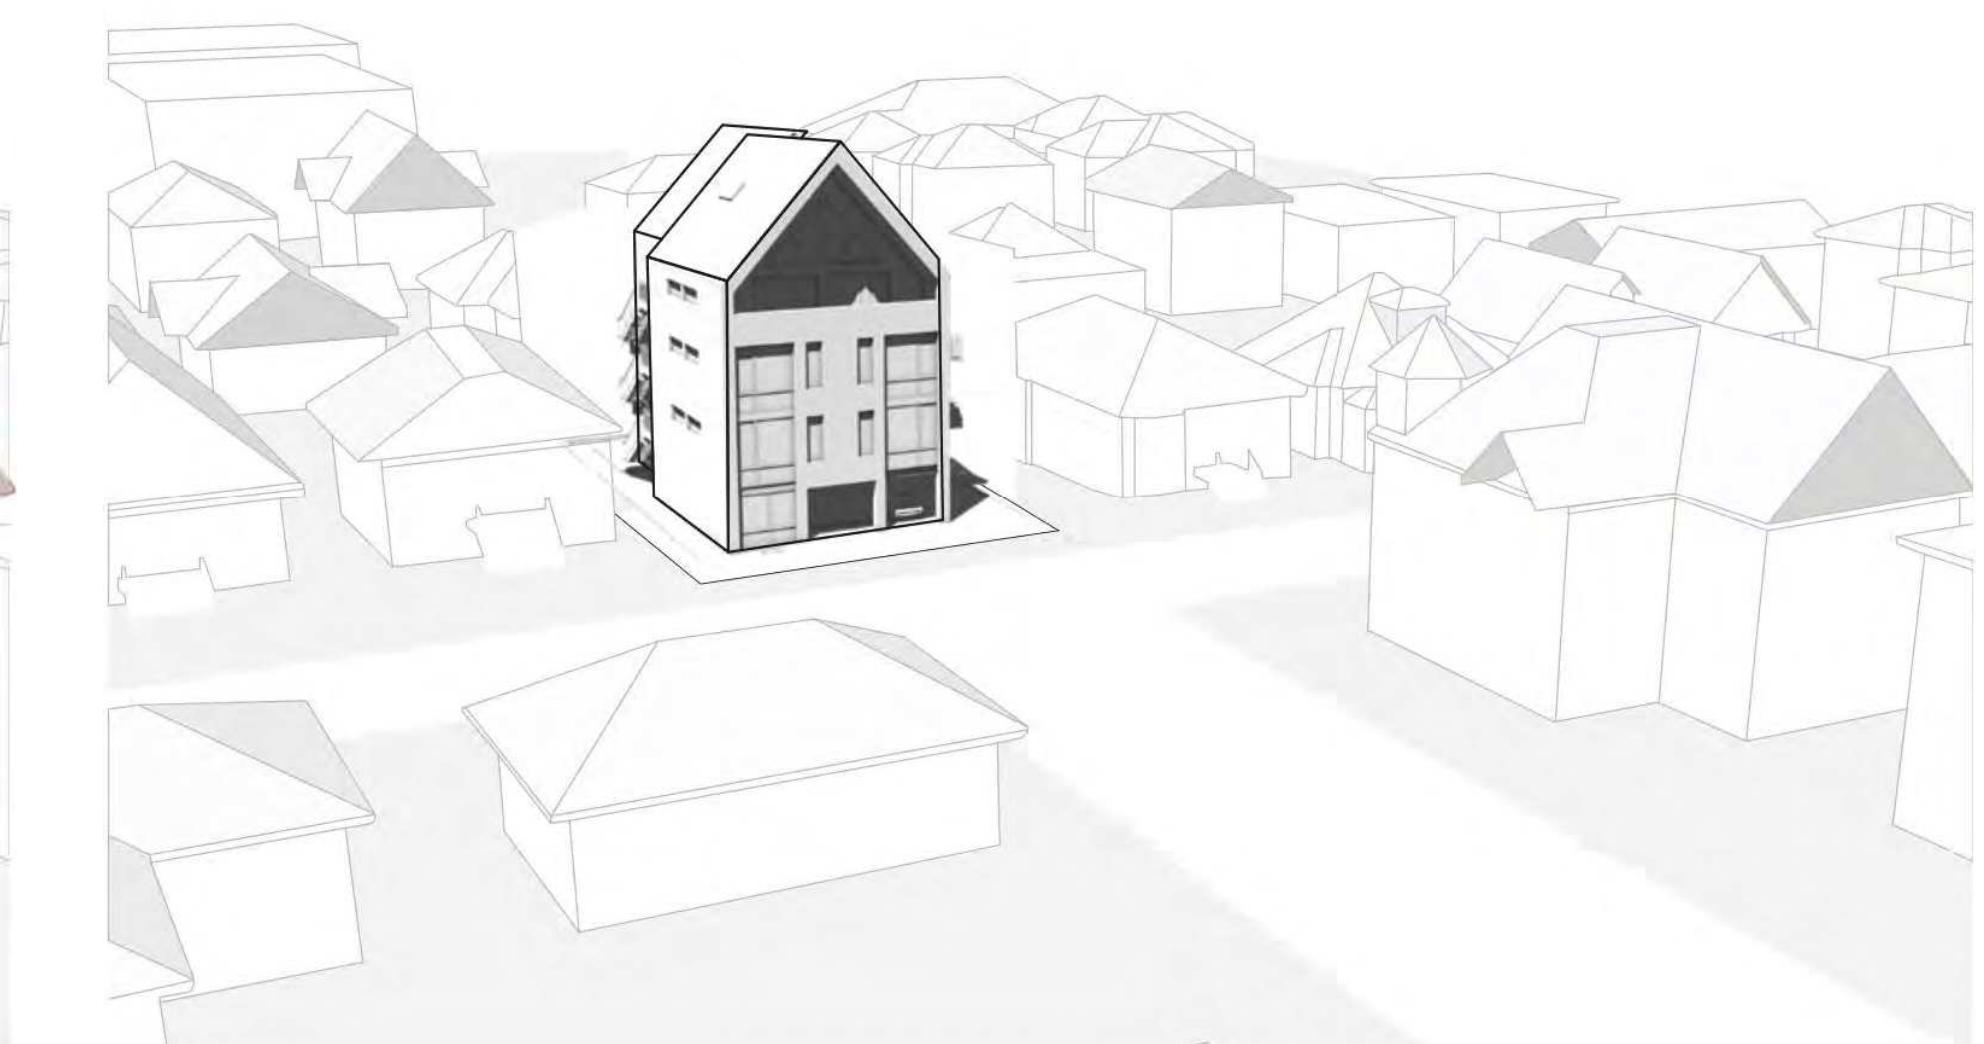

# Oeza Developments

# James Bay Development

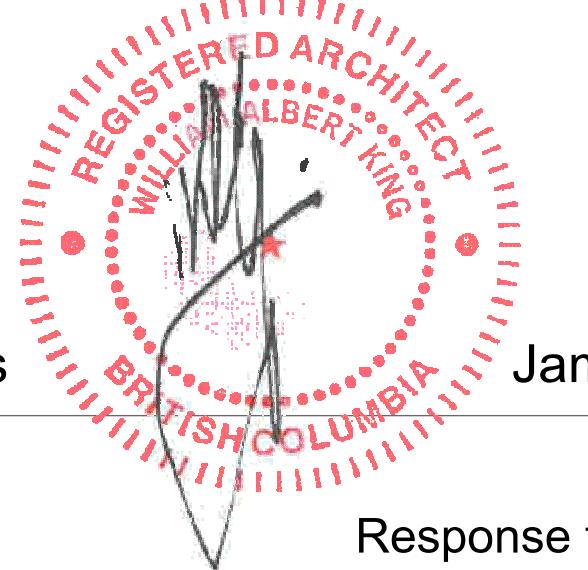



Existing Building, 50 Government



Existing Building, 50 Government



Proposed Building, 50 Government



Proposed Building, 50 Government



Oeza Developments

James Bay Development

2024-09-27  
RZ-004


James Bay Perspectives



1 Existing Street Elevation  
Scale: 1:200





2 Proposed Street Elevation  
Scale: 1:200

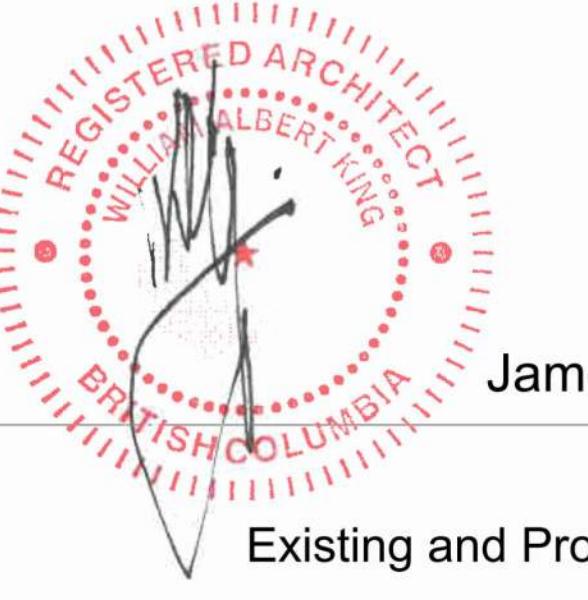




2 Proposed Street Elevation  
A301 Scale: 1:200

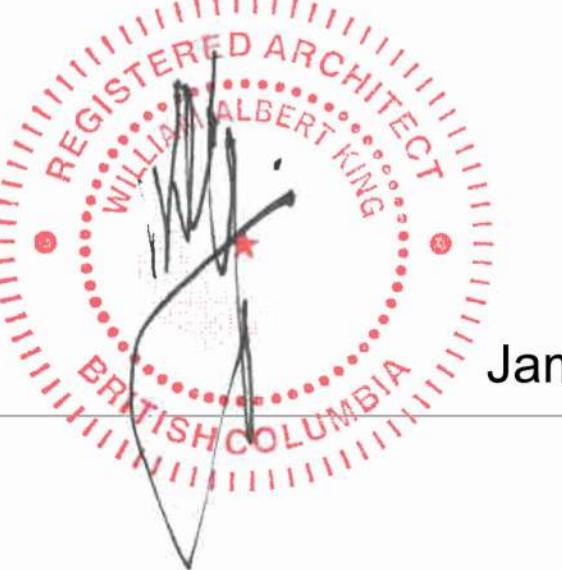


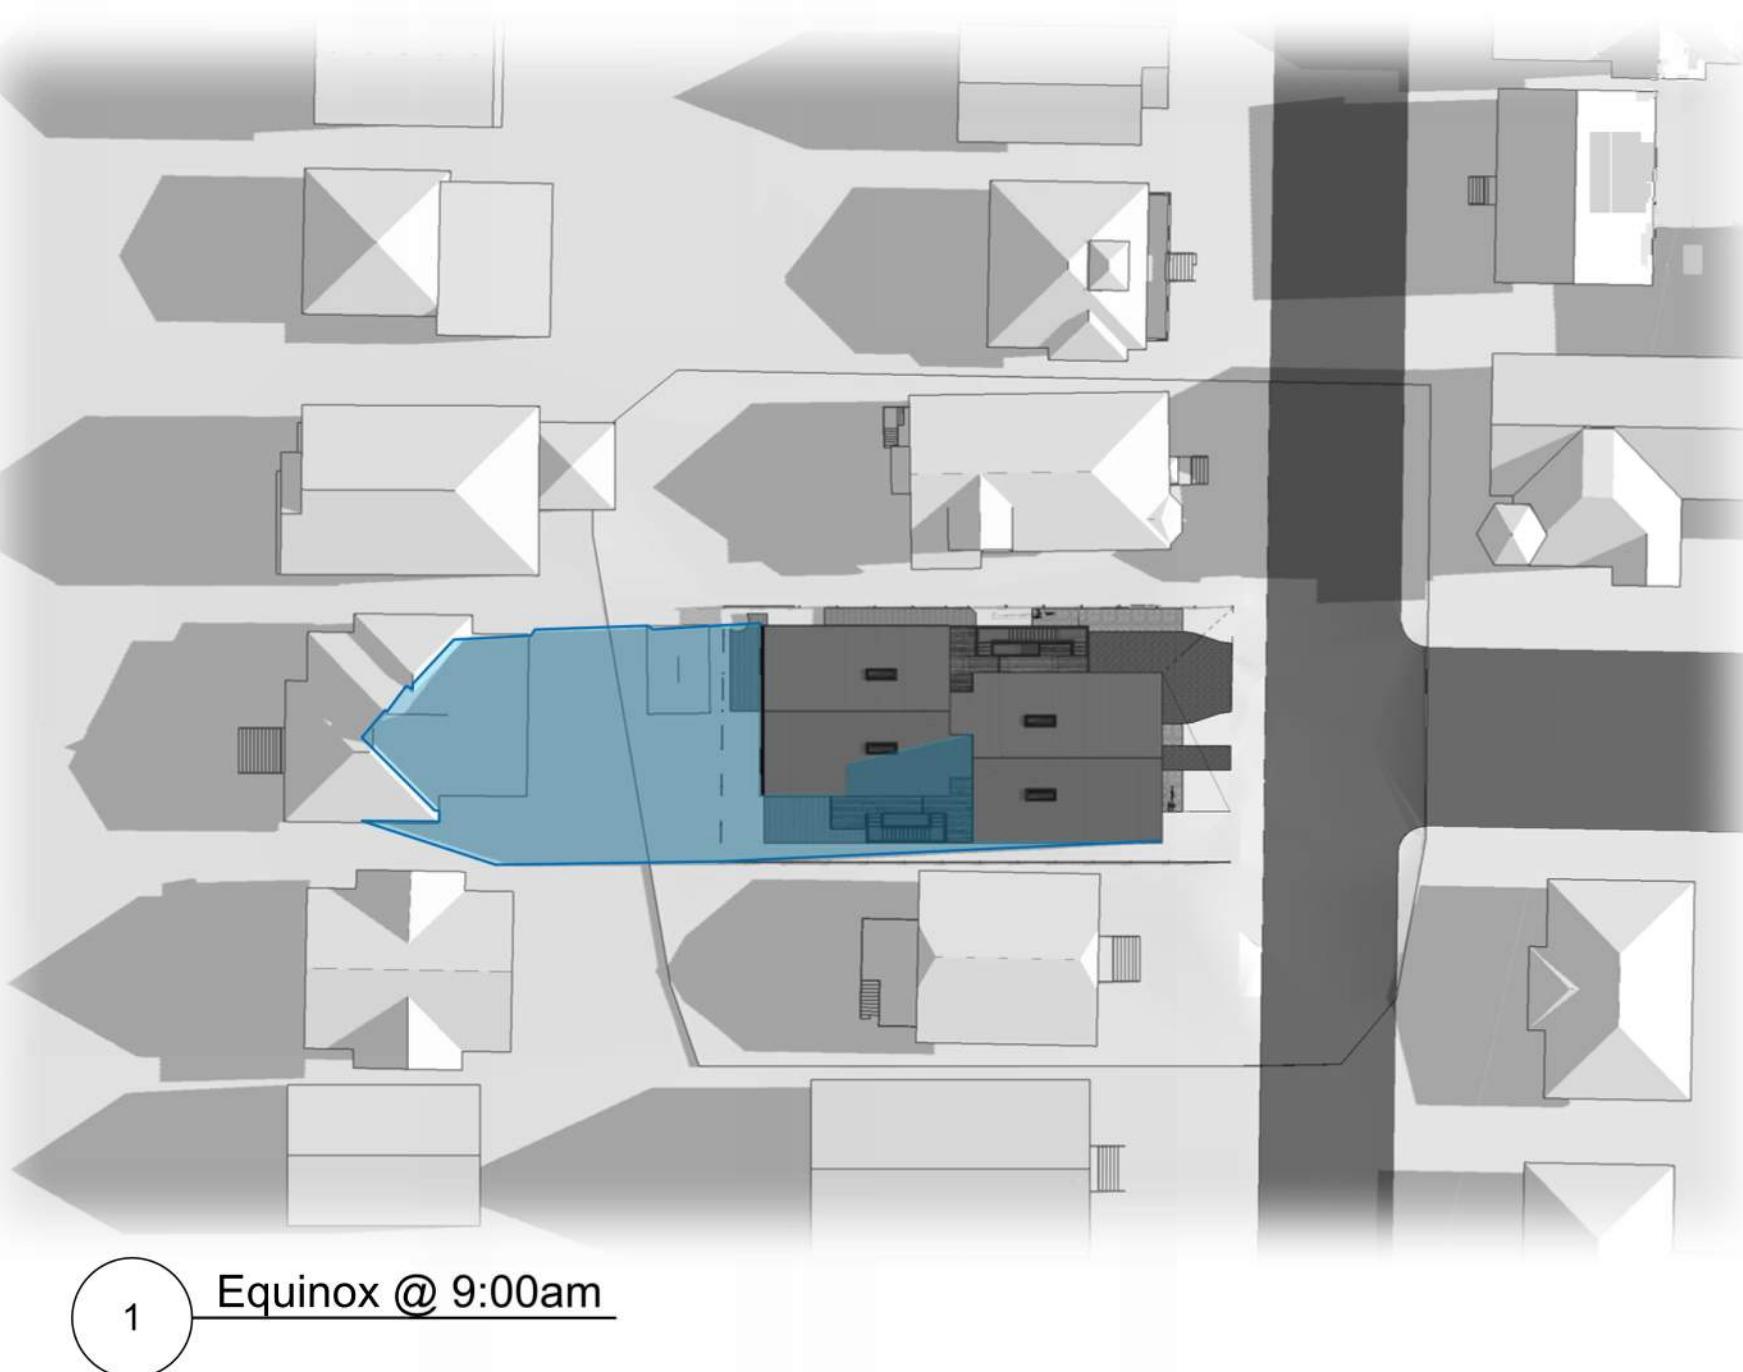

1 Equinox @ 9:00am

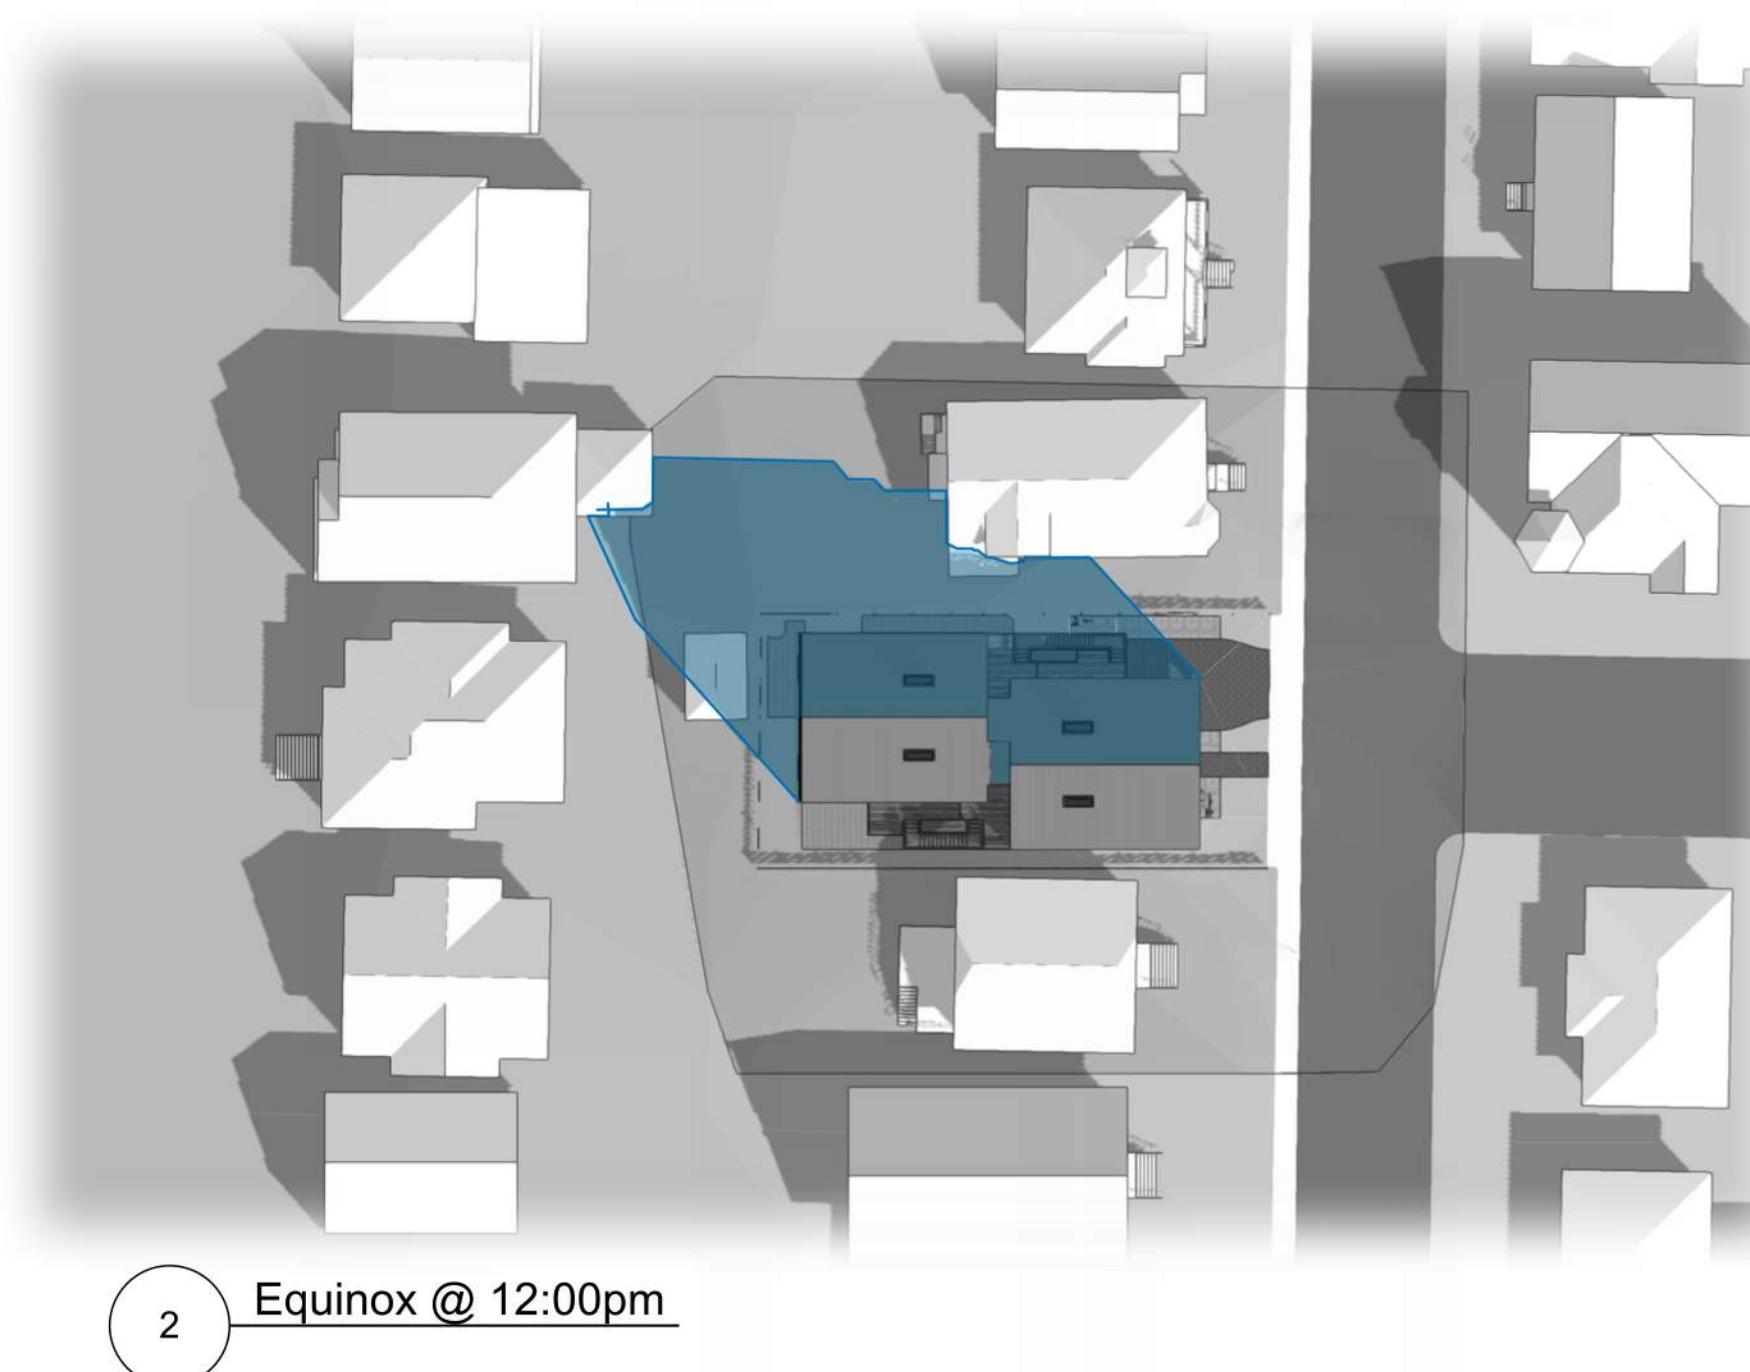

2 Equinox @ 12:00pm

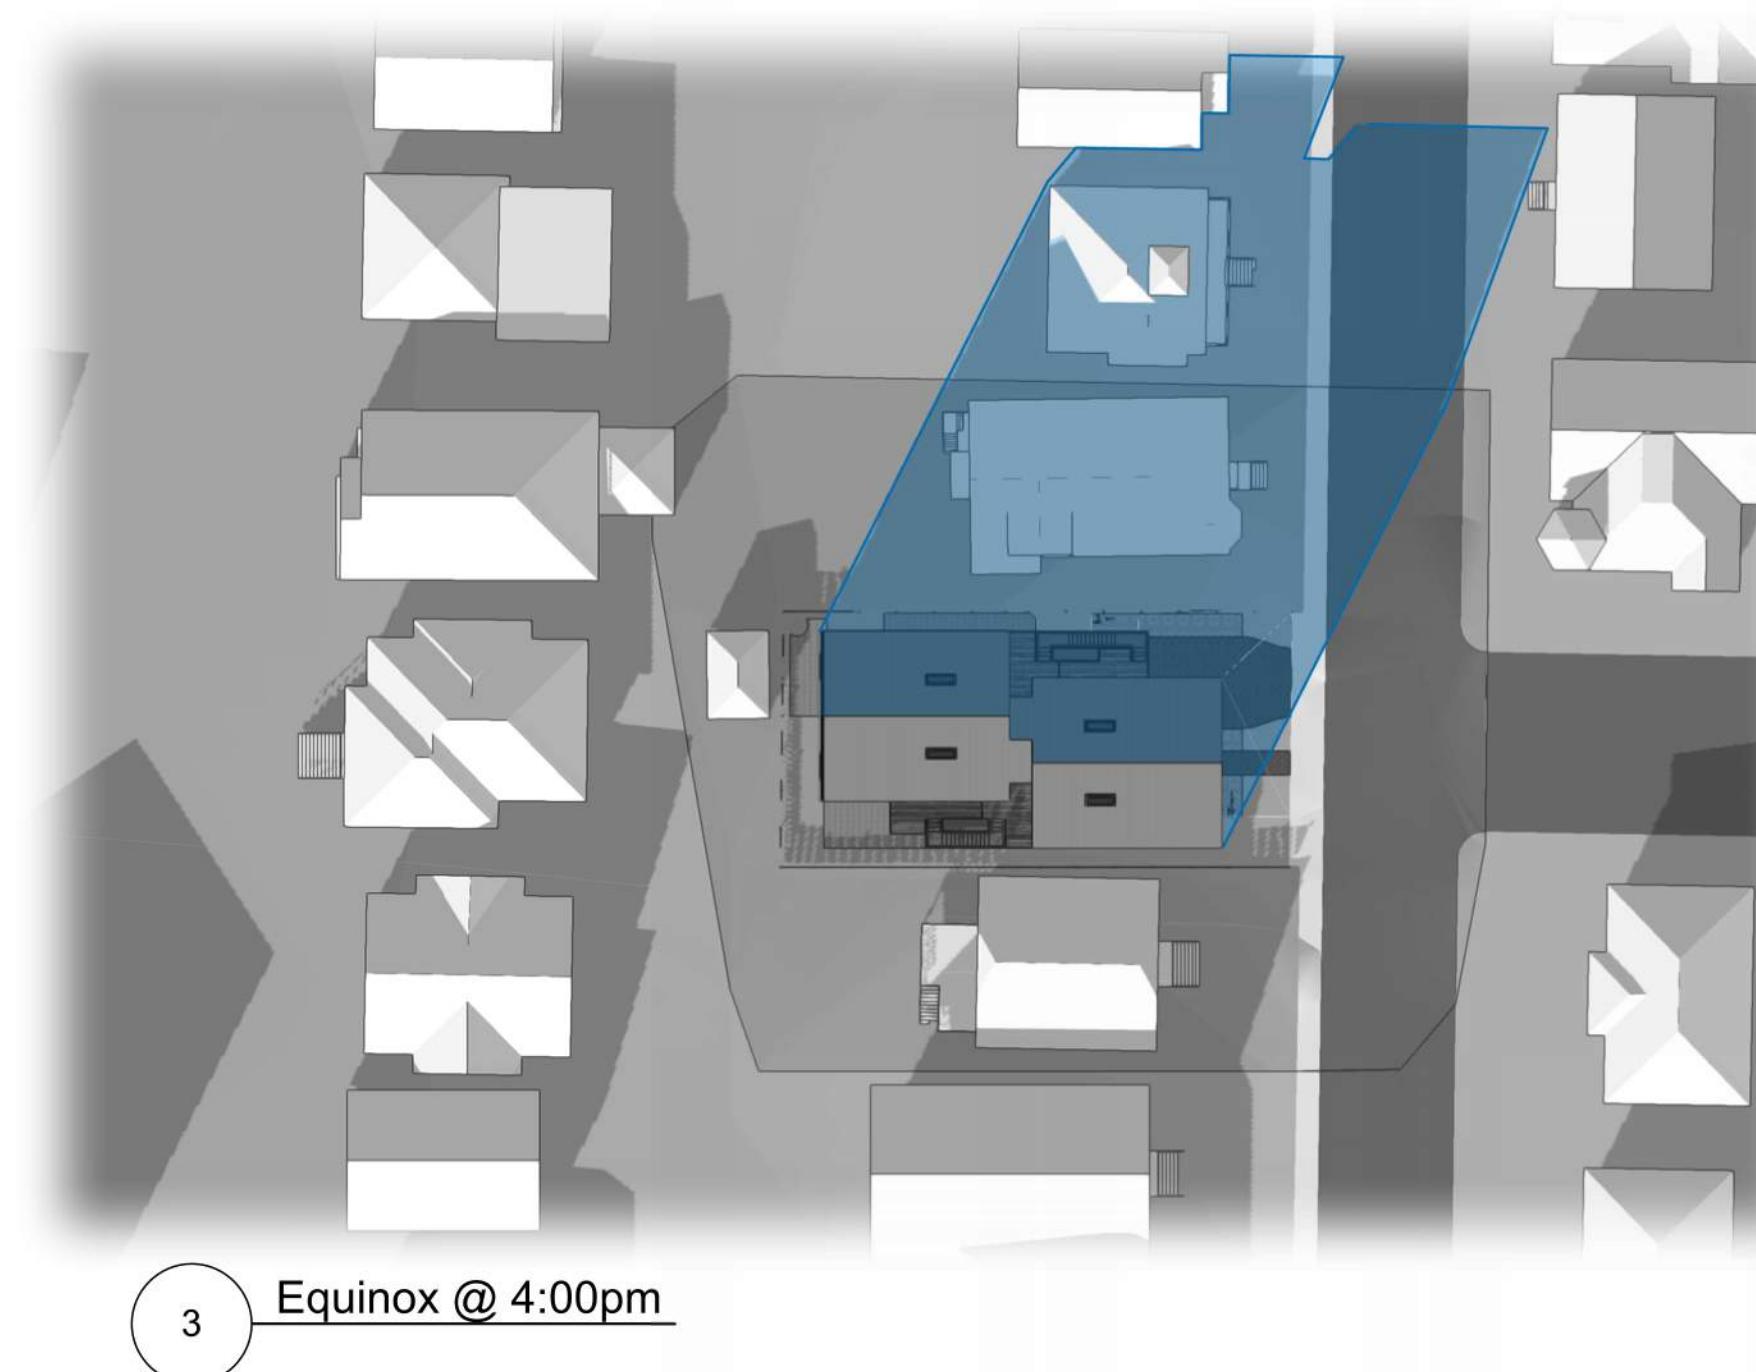


3 Equinox @ 4:00pm




4 Summer Solstice @ 9:00am




5 Summer Solstice @ 12:00pm

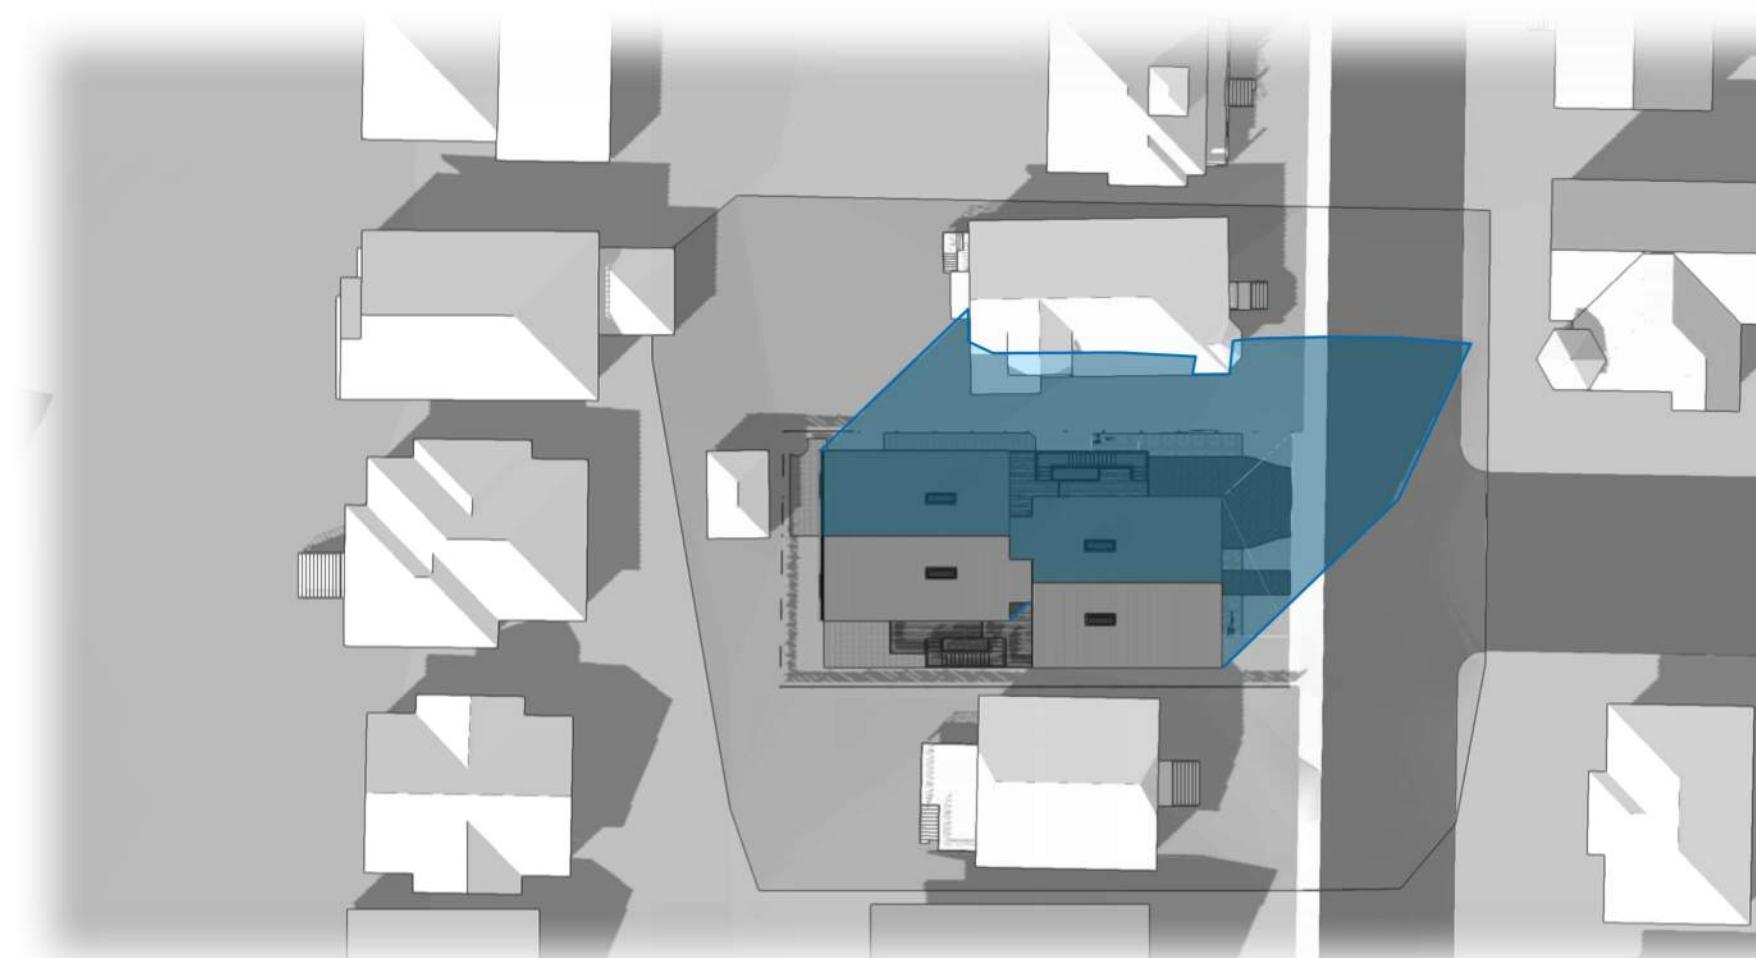

6 Summer Solstice @ 4:00pm

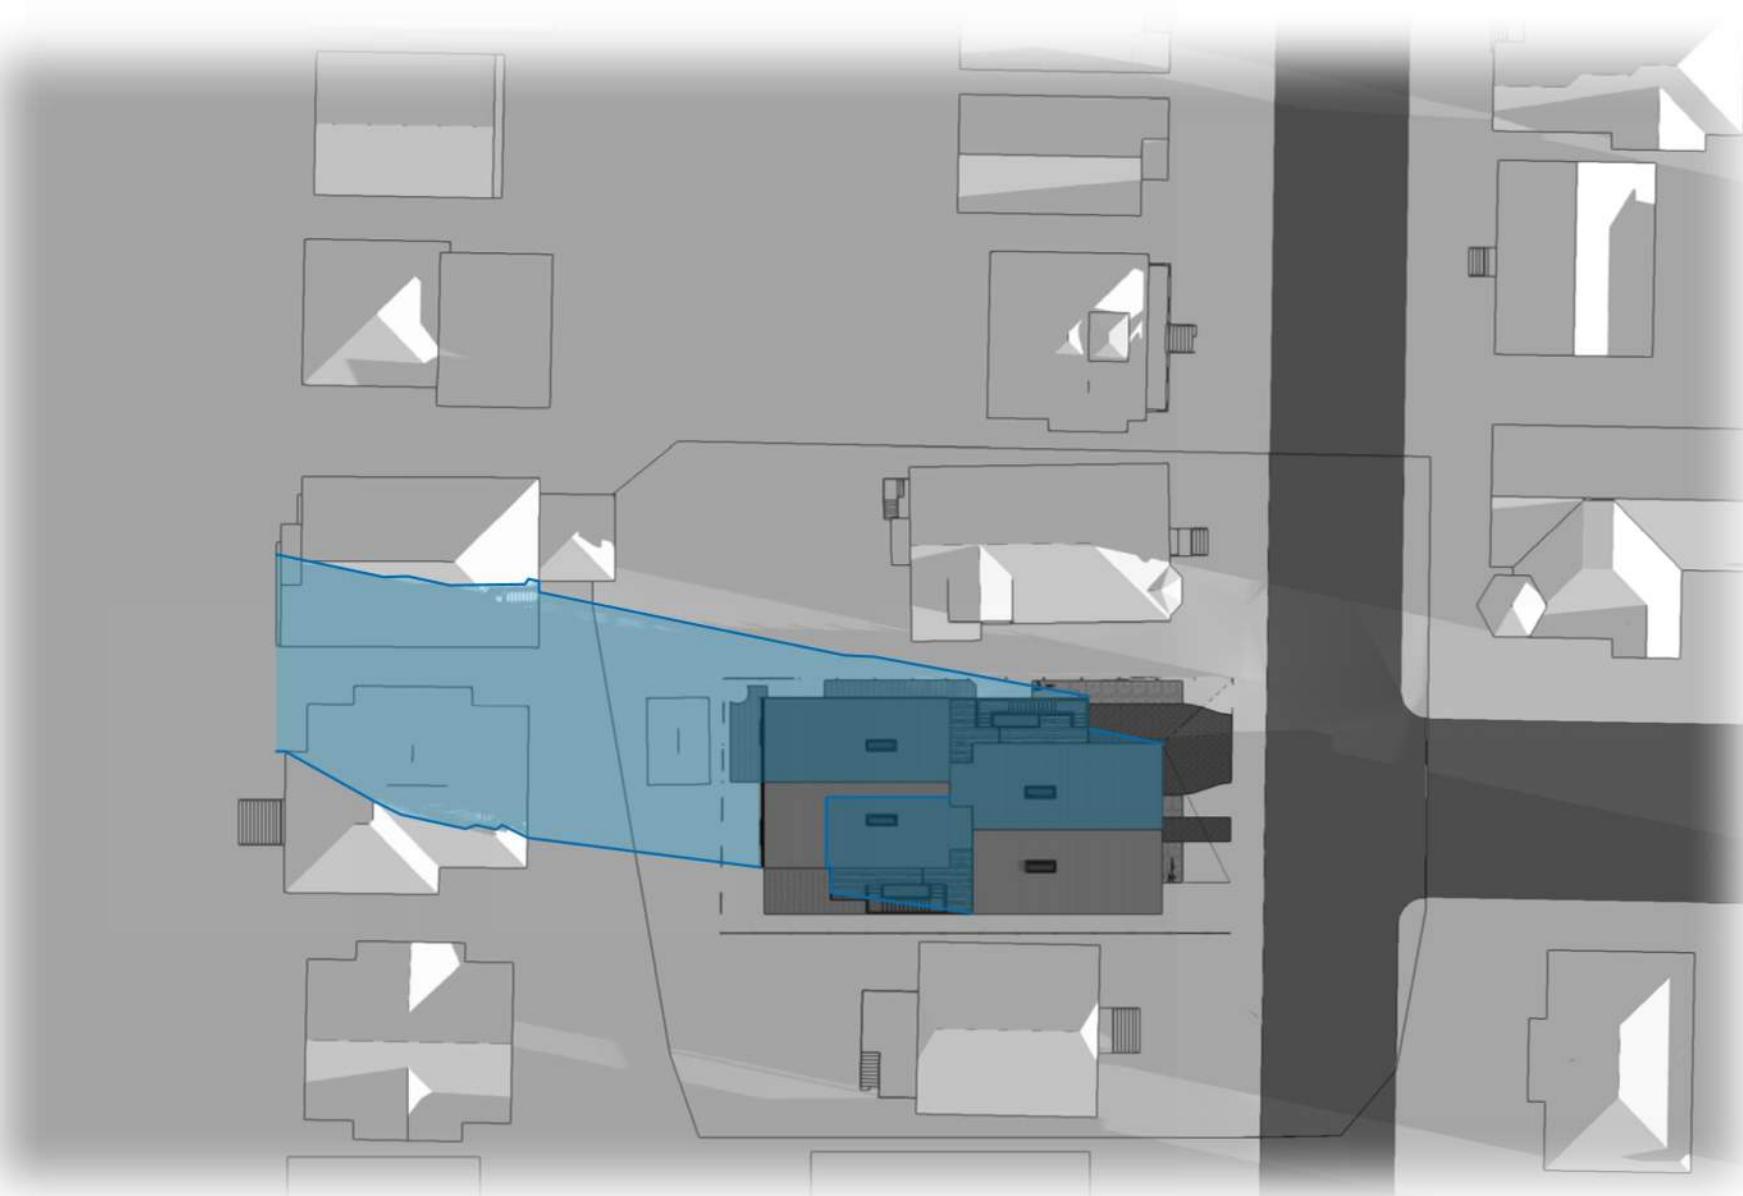

7 Winter Solstice @ 9:00am

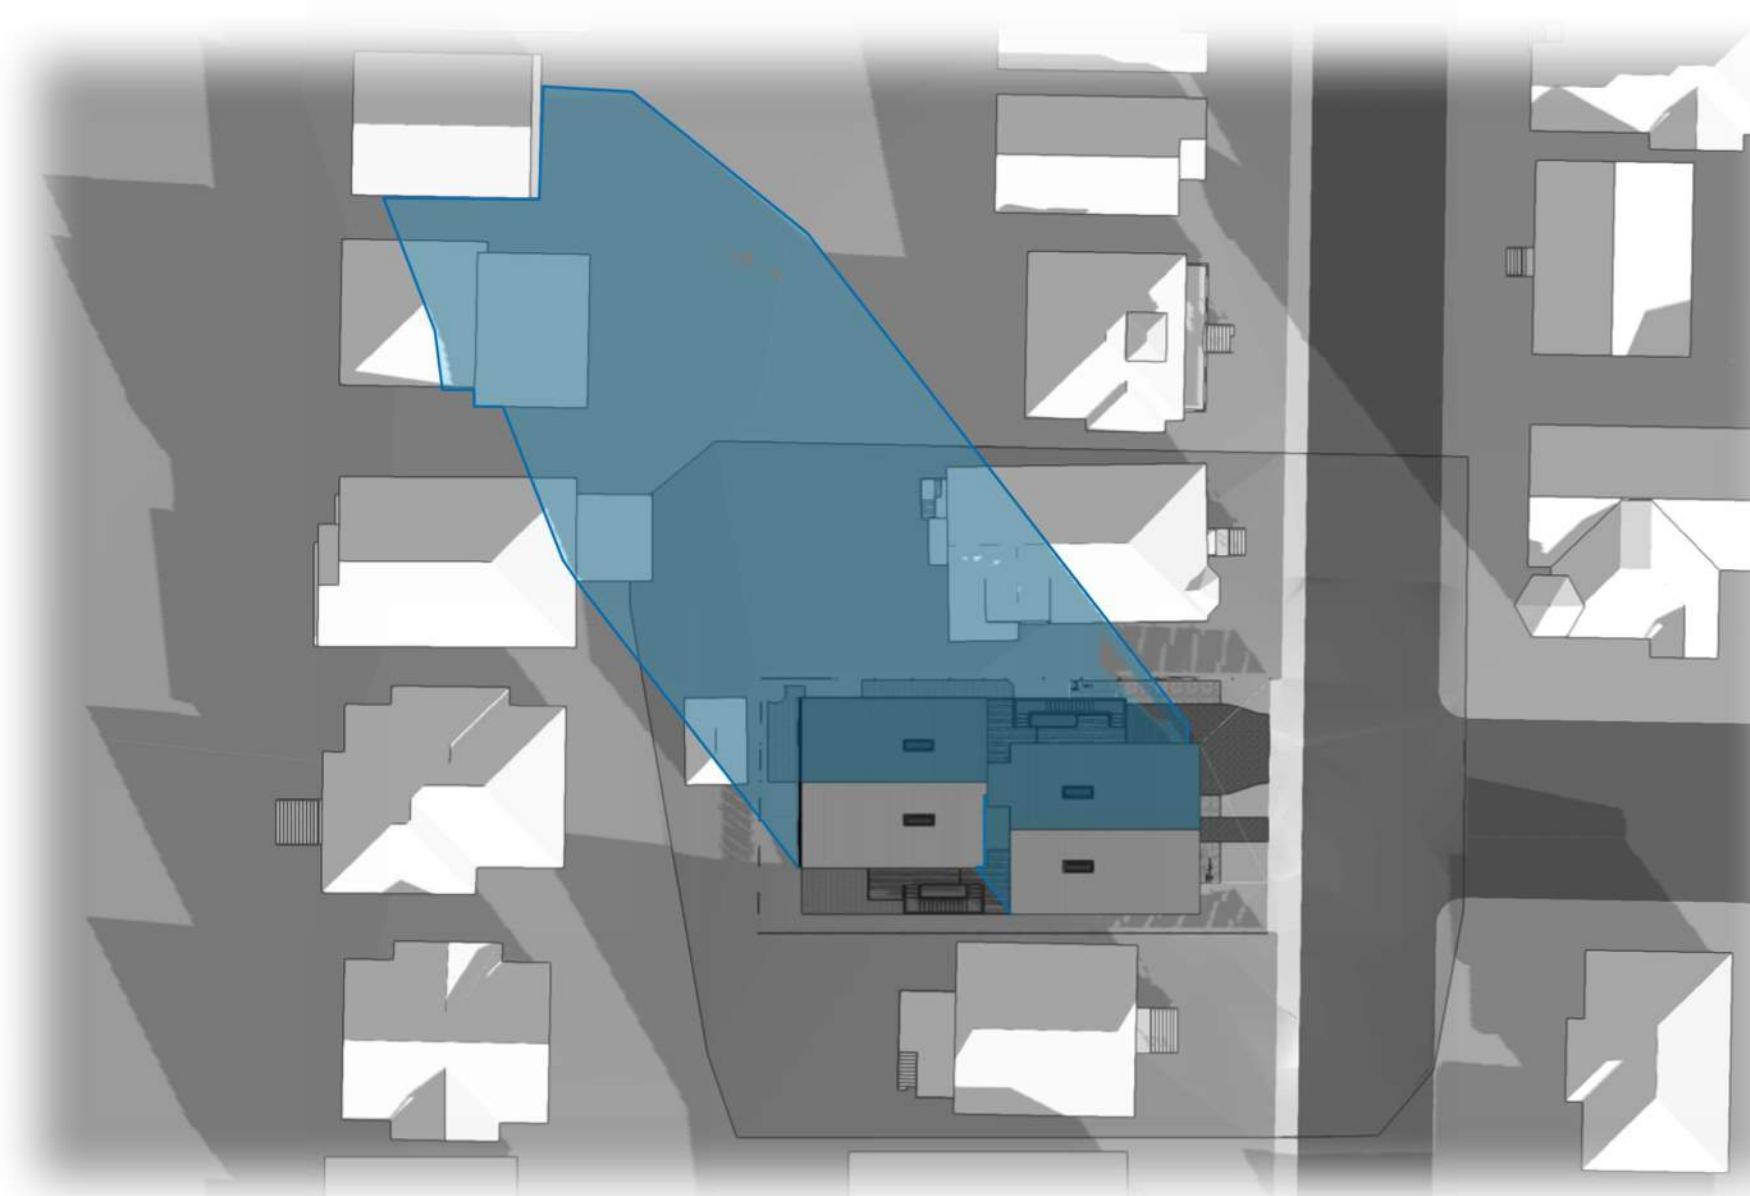

8 Winter Solstice @ 12:00pm




9 Winter Solstice @ 3:30pm

Oeza Developments

James Bay Development



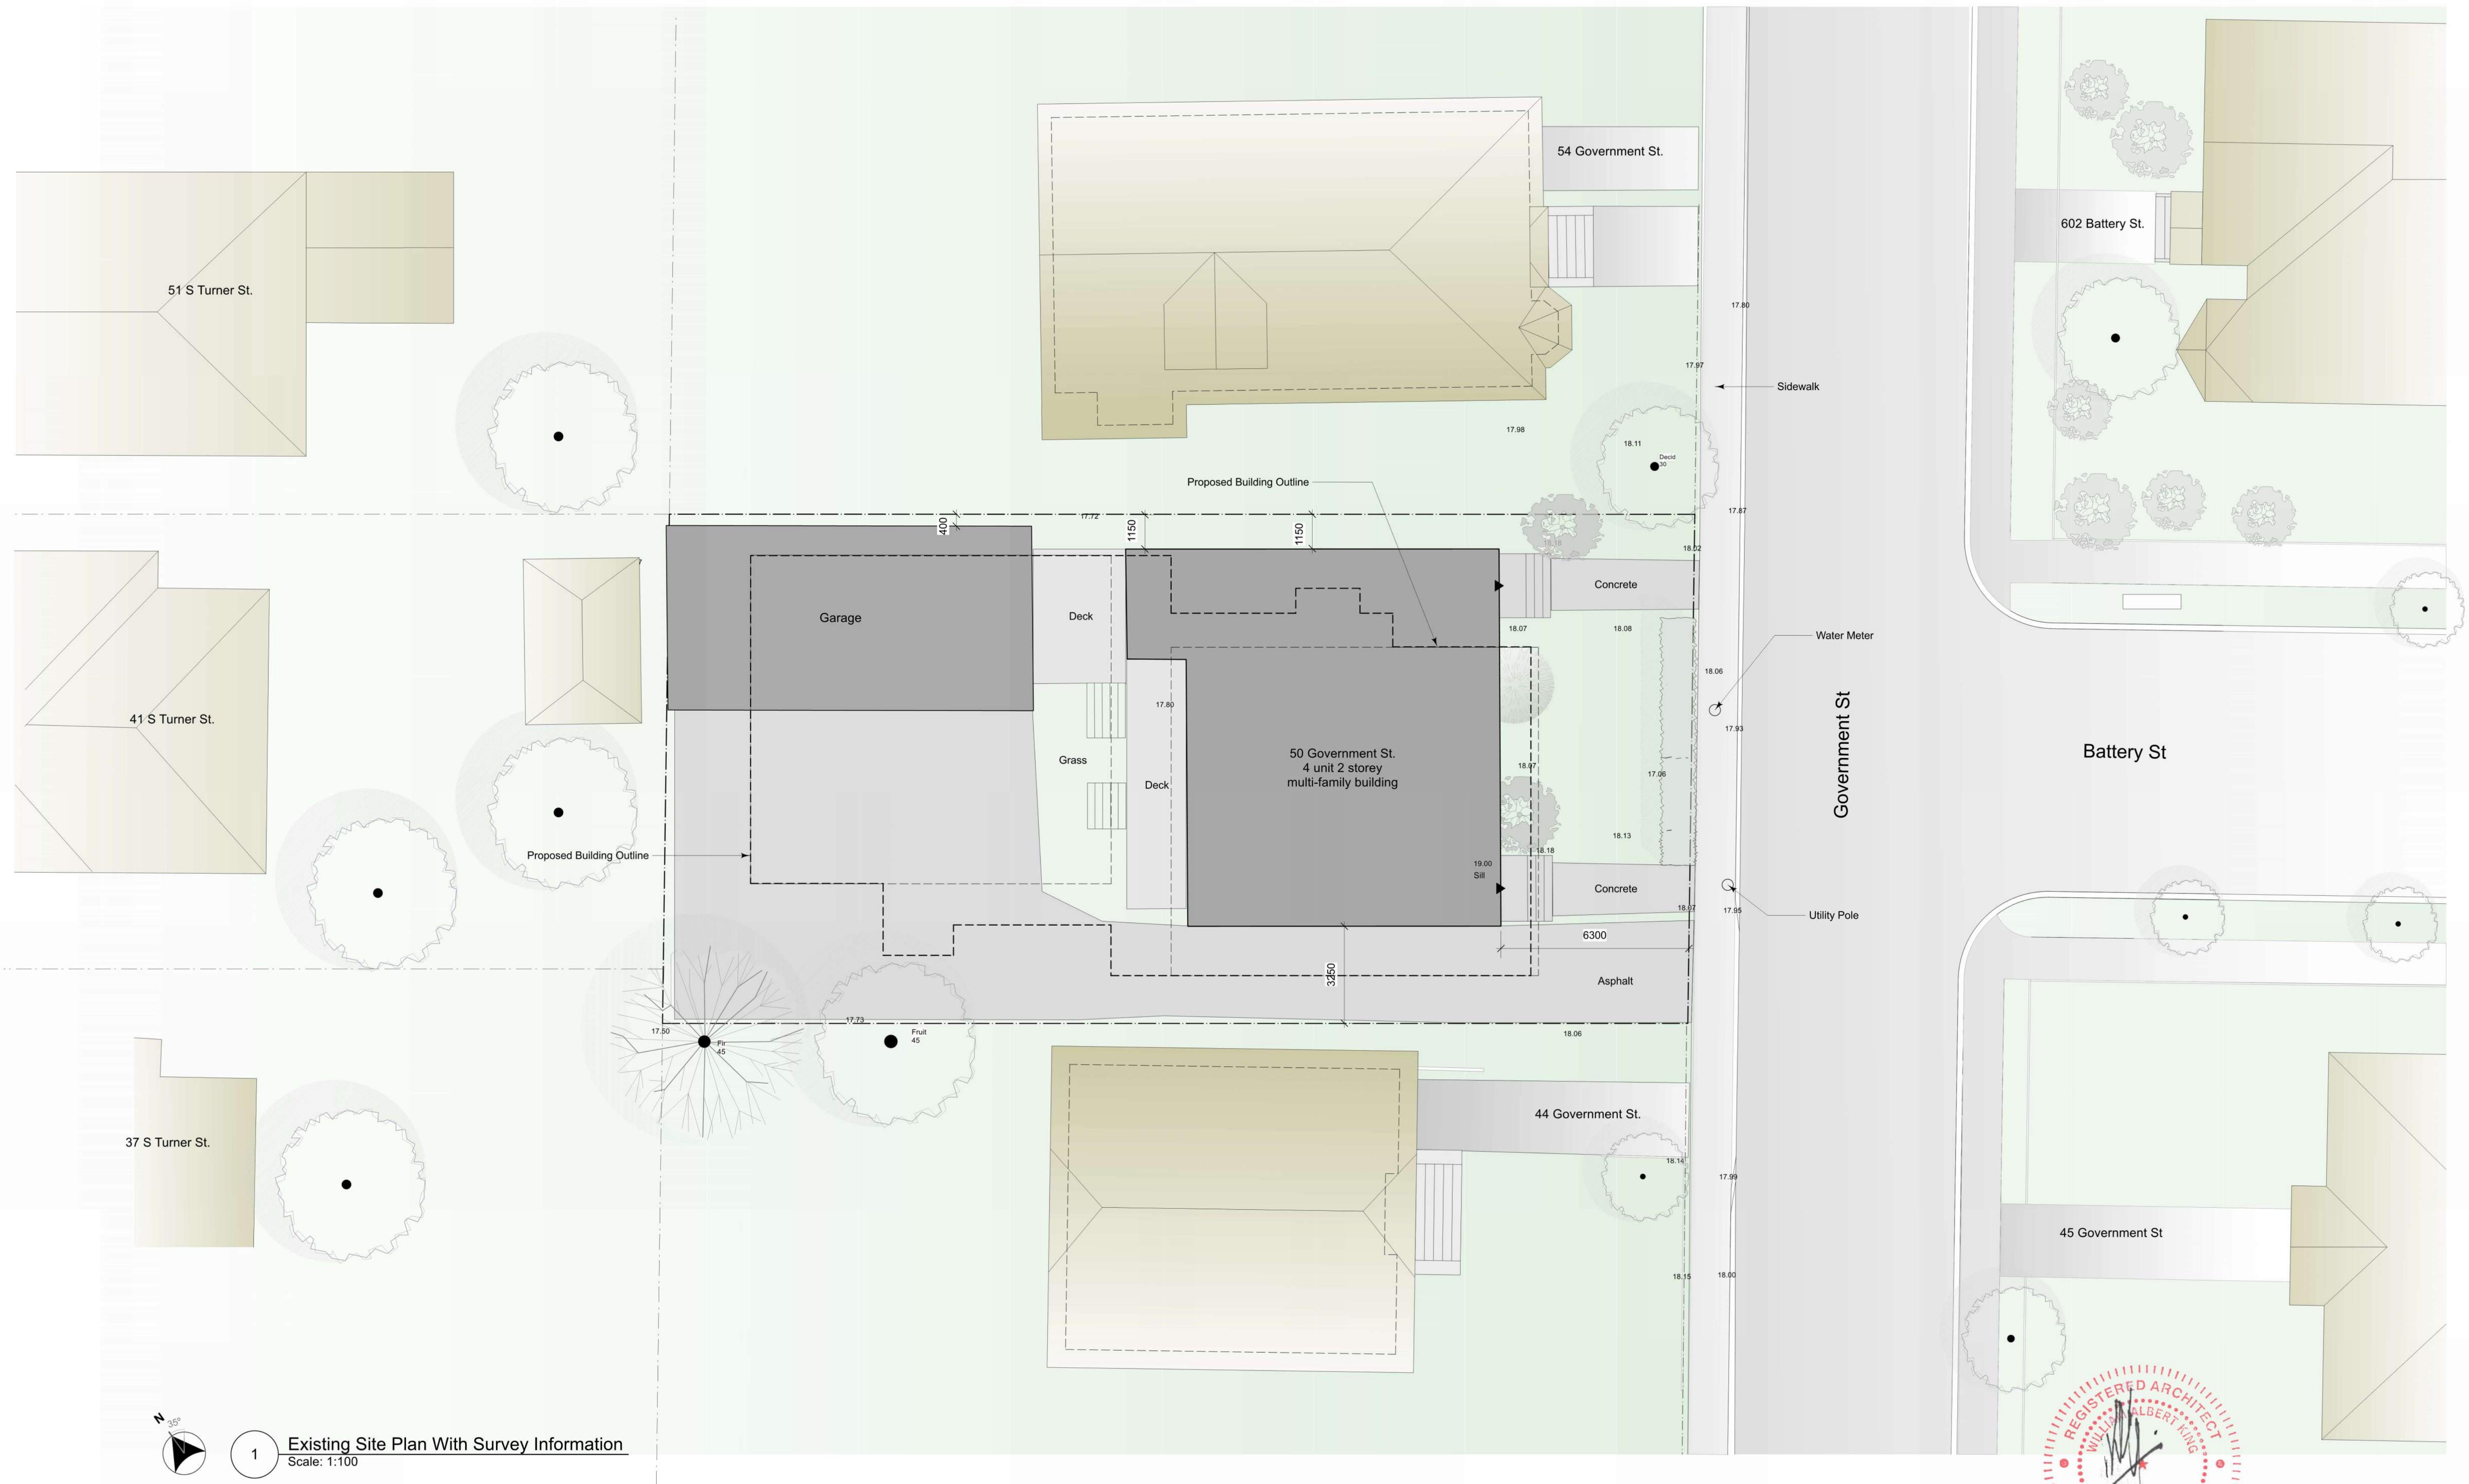

Project ID: 2022-00

 WAYMARK  
ARCHITECTURE

ARCHITECTURE  
IMPORTANT: copyright reserved. This design and drawing is the exclusive property of Waymark Architecture and cannot be used for any purpose without the written consent of the Architect.


Oeza Developments

## James Bay Development

## Existing Site Plan

4-09-27  
-008



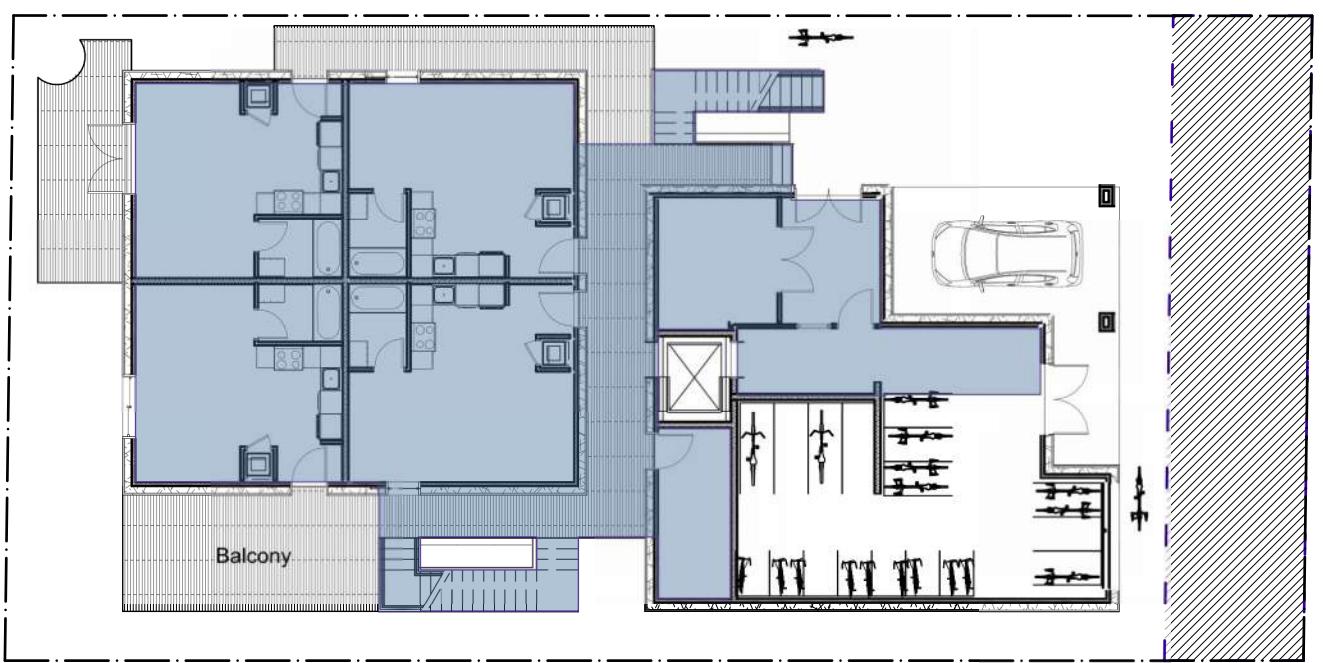

1 Level 1 Floor Area (FSR Calculation)  
Scale: 1:200 Area 214.43 m<sup>2</sup>



2 Level 2 & 3 Floor Area (FSR Calculation)  
Scale: 1:200 Area 303.35 m<sup>2</sup>



3 Level 4 Floor Area (FSR Calculation)  
Scale: 1:200 Area 247 m<sup>2</sup>




4 Level 4 / Loft (FSR Calculation)  
Scale: 1:200 Area 73.26 m<sup>2</sup>


Lot Area: 586.27 m<sup>2</sup>

Floor Areas:  
Level 1: 214.43 m<sup>2</sup>  
Level 2: 303.35 m<sup>2</sup>  
Level 3: 303.35 m<sup>2</sup>  
Level 4: 247 m<sup>2</sup>  
Loft: 73.26 m<sup>2</sup>  
Total Floor Area 1141.39 m<sup>2</sup>


Floor Space Ratio 1.94:1

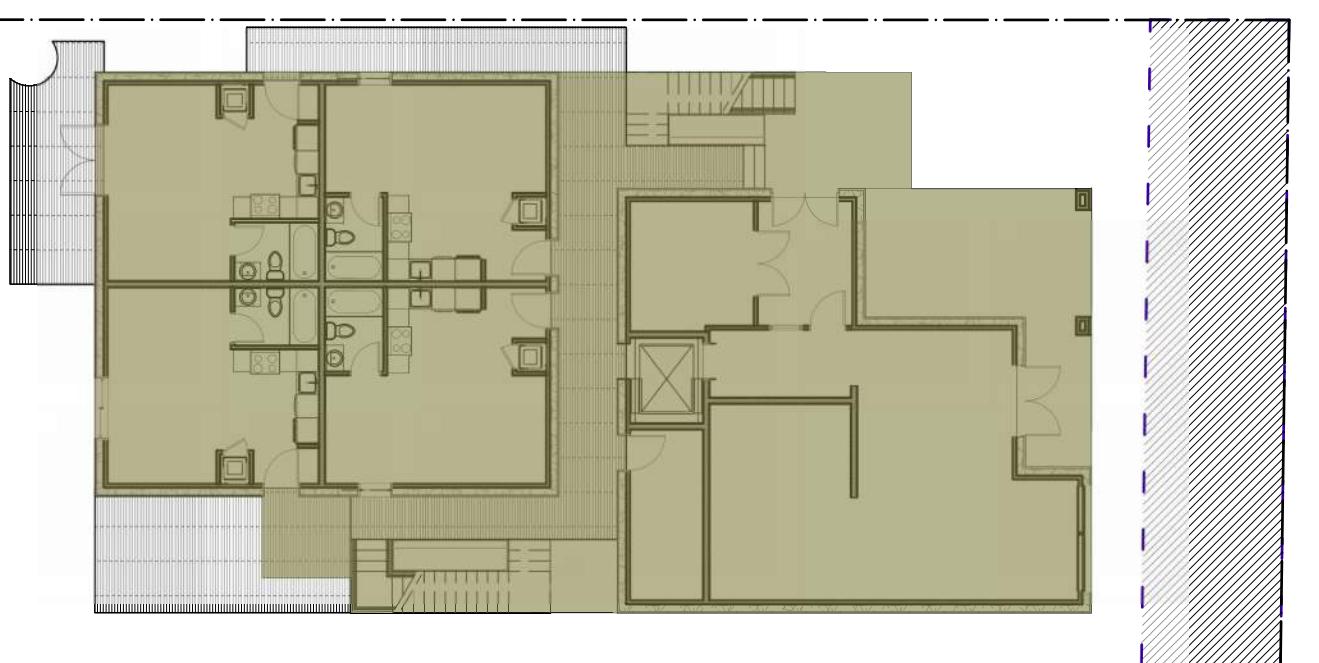

5 Site Coverage  
Scale: 1:200 Building Area 346.79 m<sup>2</sup>  
Site Area 586.27 m<sup>2</sup>  
Site Coverage 59.15%

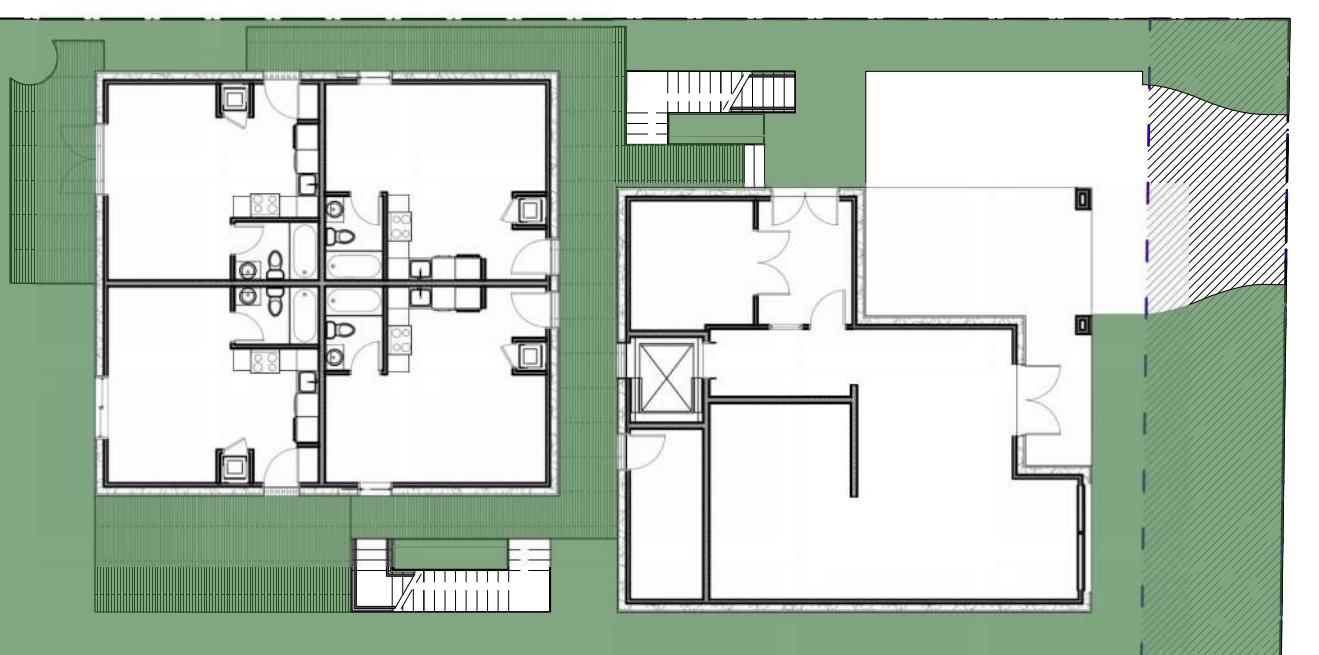

6 Open Site Space  
Scale: 1:200 Open Area 245.90 m<sup>2</sup>  
Site Area 586.27 m<sup>2</sup>  
Site Coverage 41.94 %

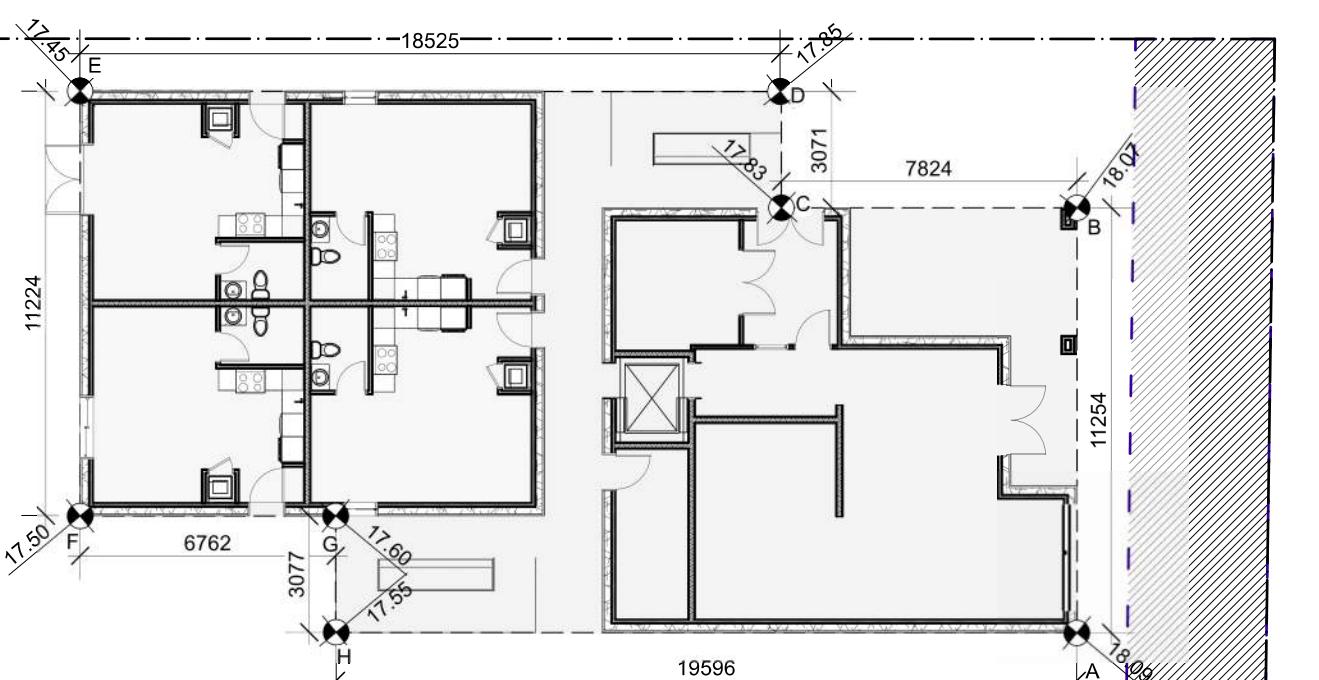

7 Average Grade Calculation  
Scale: 1:200

Average grade calculation:

$$A \& B (18.09 + 18.07) / 2 \times 11.25 = 203.4$$

$$B \& C (18.07 + 17.83) / 2 \times 7.82 = 140.36$$

$$C \& D (17.83 + 17.85) / 2 \times 3.07 = 54.76$$

$$D \& E (17.85 + 17.45) / 2 \times 18.52 = 326.87$$

$$E \& F (17.45 + 17.50) / 2 \times 11.22 = 196.06$$


$$F \& G (17.50 + 17.6) / 2 \times 6.76 = 118.63$$

$$G \& H (17.6 + 17.55) / 2 \times 3.07 = 53.9$$

$$H \& A (17.55 + 18.09) / 2 \times 19.59 = 349.09$$

$$\text{Total} = \text{Perimeter} = 1442.97 / 81.39 = 17.729$$

Average grade: 17.73

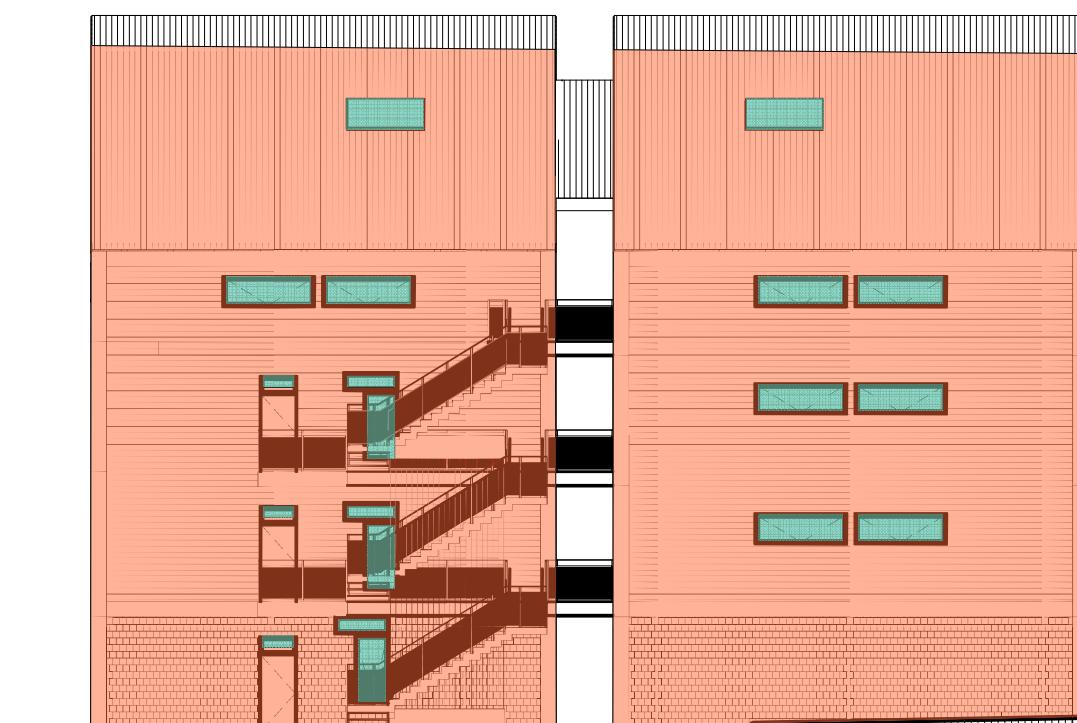



8 South Elevation  
Scale: 1:200



9 North Elevation  
Scale: 1:200



10 Rear/ West Elevation  
Scale: 1:200

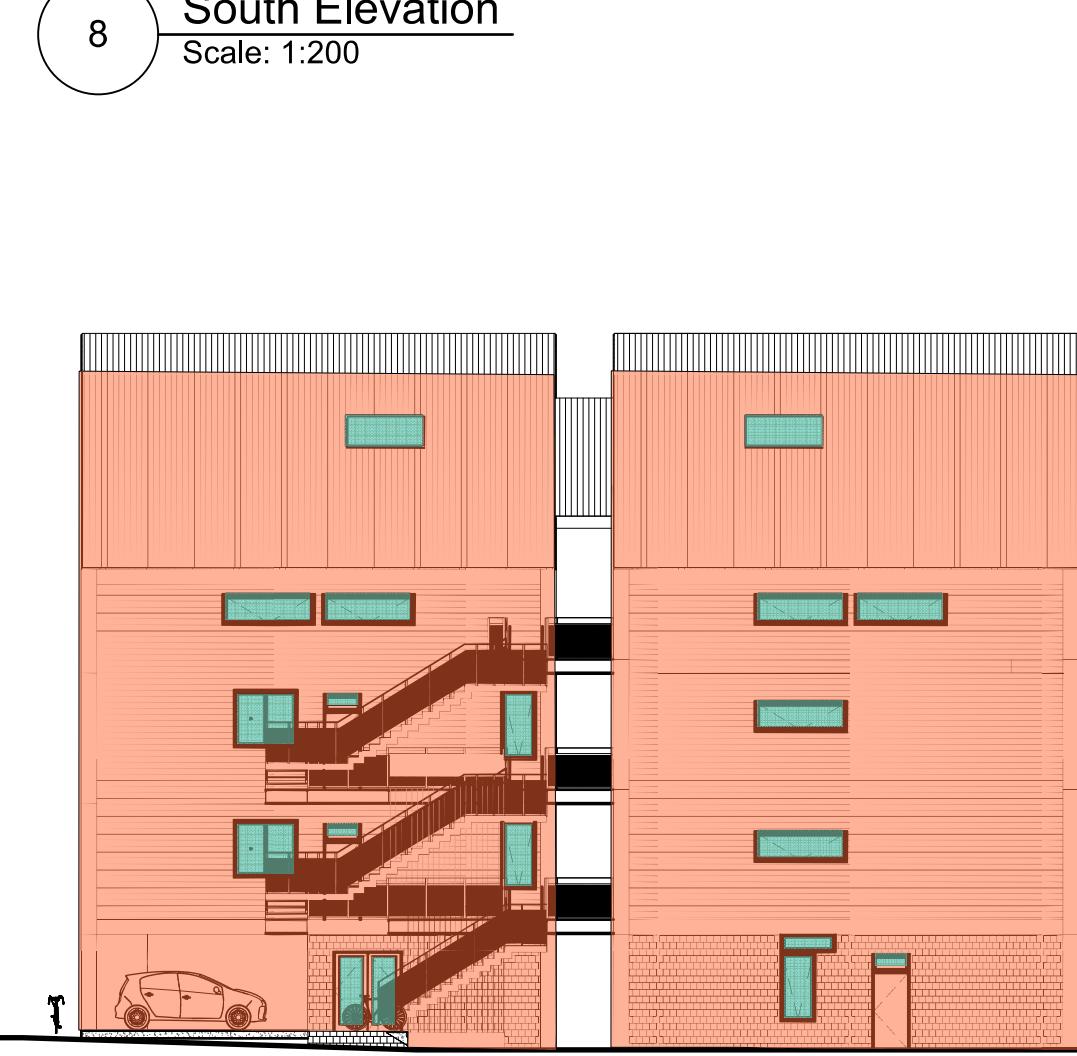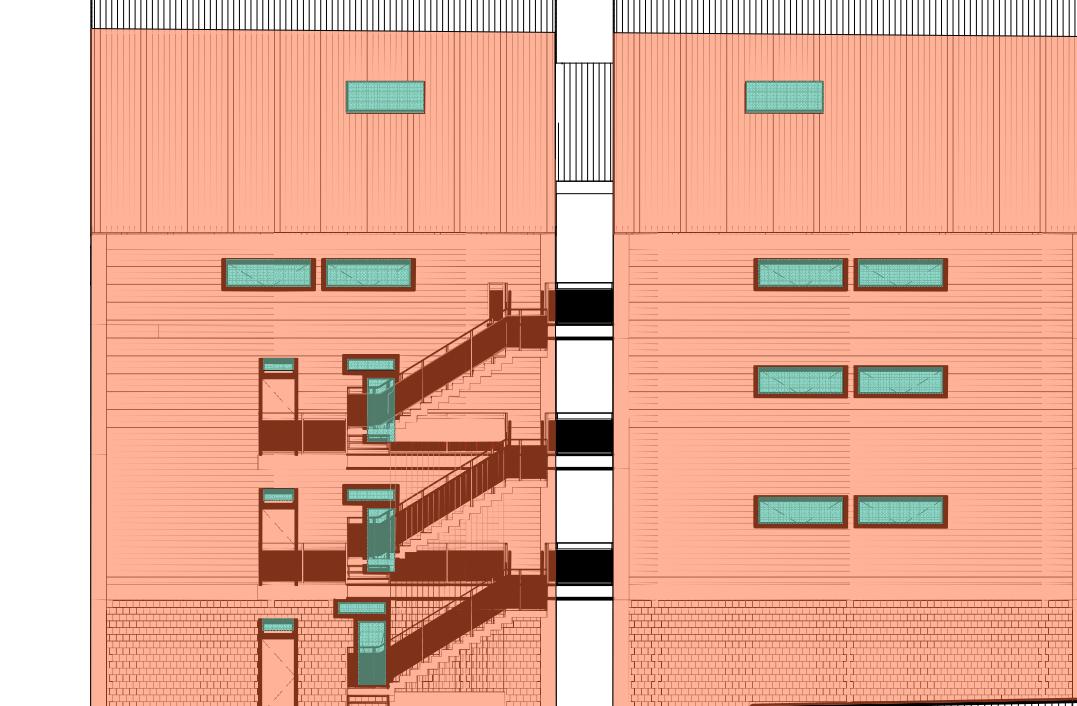


11 Front /East Elevation  
Scale: 1:200

Table 3.2.3.1-D, BCBC  
DISTANCE TO PROPERTY LINE = 1.36 m  
AREA = 446.02 m<sup>2</sup>  
PROPOSED UNPROTECTED AREA = 21.39 m<sup>2</sup>  
UNPROTECTED OPENING ALLOWED 14%, 66.2 m<sup>2</sup>  
PROPOSED OPENING 4.79 %

Table 3.2.3.1-D, BCBC  
DISTANCE TO PROPERTY LINE = 1.36 m  
AREA = 442.33 m<sup>2</sup>  
PROPOSED UNPROTECTED AREA = 23.39 m<sup>2</sup>  
UNPROTECTED OPENING ALLOWED 14%, 67.03 m<sup>2</sup>  
PROPOSED OPENING 5.28 %


Table 3.2.3.1-D, BCBC  
LIMITING DISTANCE = 2.74 m  
AREA = 217.27 m<sup>2</sup>  
PROPOSED UNPROTECTED AREA = 33.58 m<sup>2</sup>  
UNPROTECTED OPENING ALLOWED 21%, 45.6 m<sup>2</sup>  
PROPOSED OPENING 16.3 %

Table 3.2.3.1-D, BCBC  
LIMITING DISTANCE = 10.08 m  
AREA = 209.78 m<sup>2</sup>  
PROPOSED UNPROTECTED AREA = 51 m<sup>2</sup>  
UNPROTECTED OPENING ALLOWED 100%, 203.3 m<sup>2</sup>  
PROPOSED OPENING 24.3 %

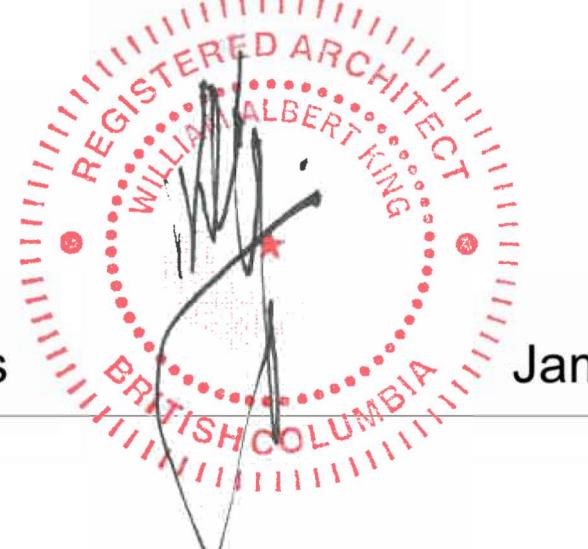


Oeza Developments



James Bay Development





WAYMARK  
ARCHITECTURE

IMPORTANT: copyright reserved. This design and drawing is the exclusive property of Waymark Architecture and cannot be used for any purpose without the written consent of the Architect.

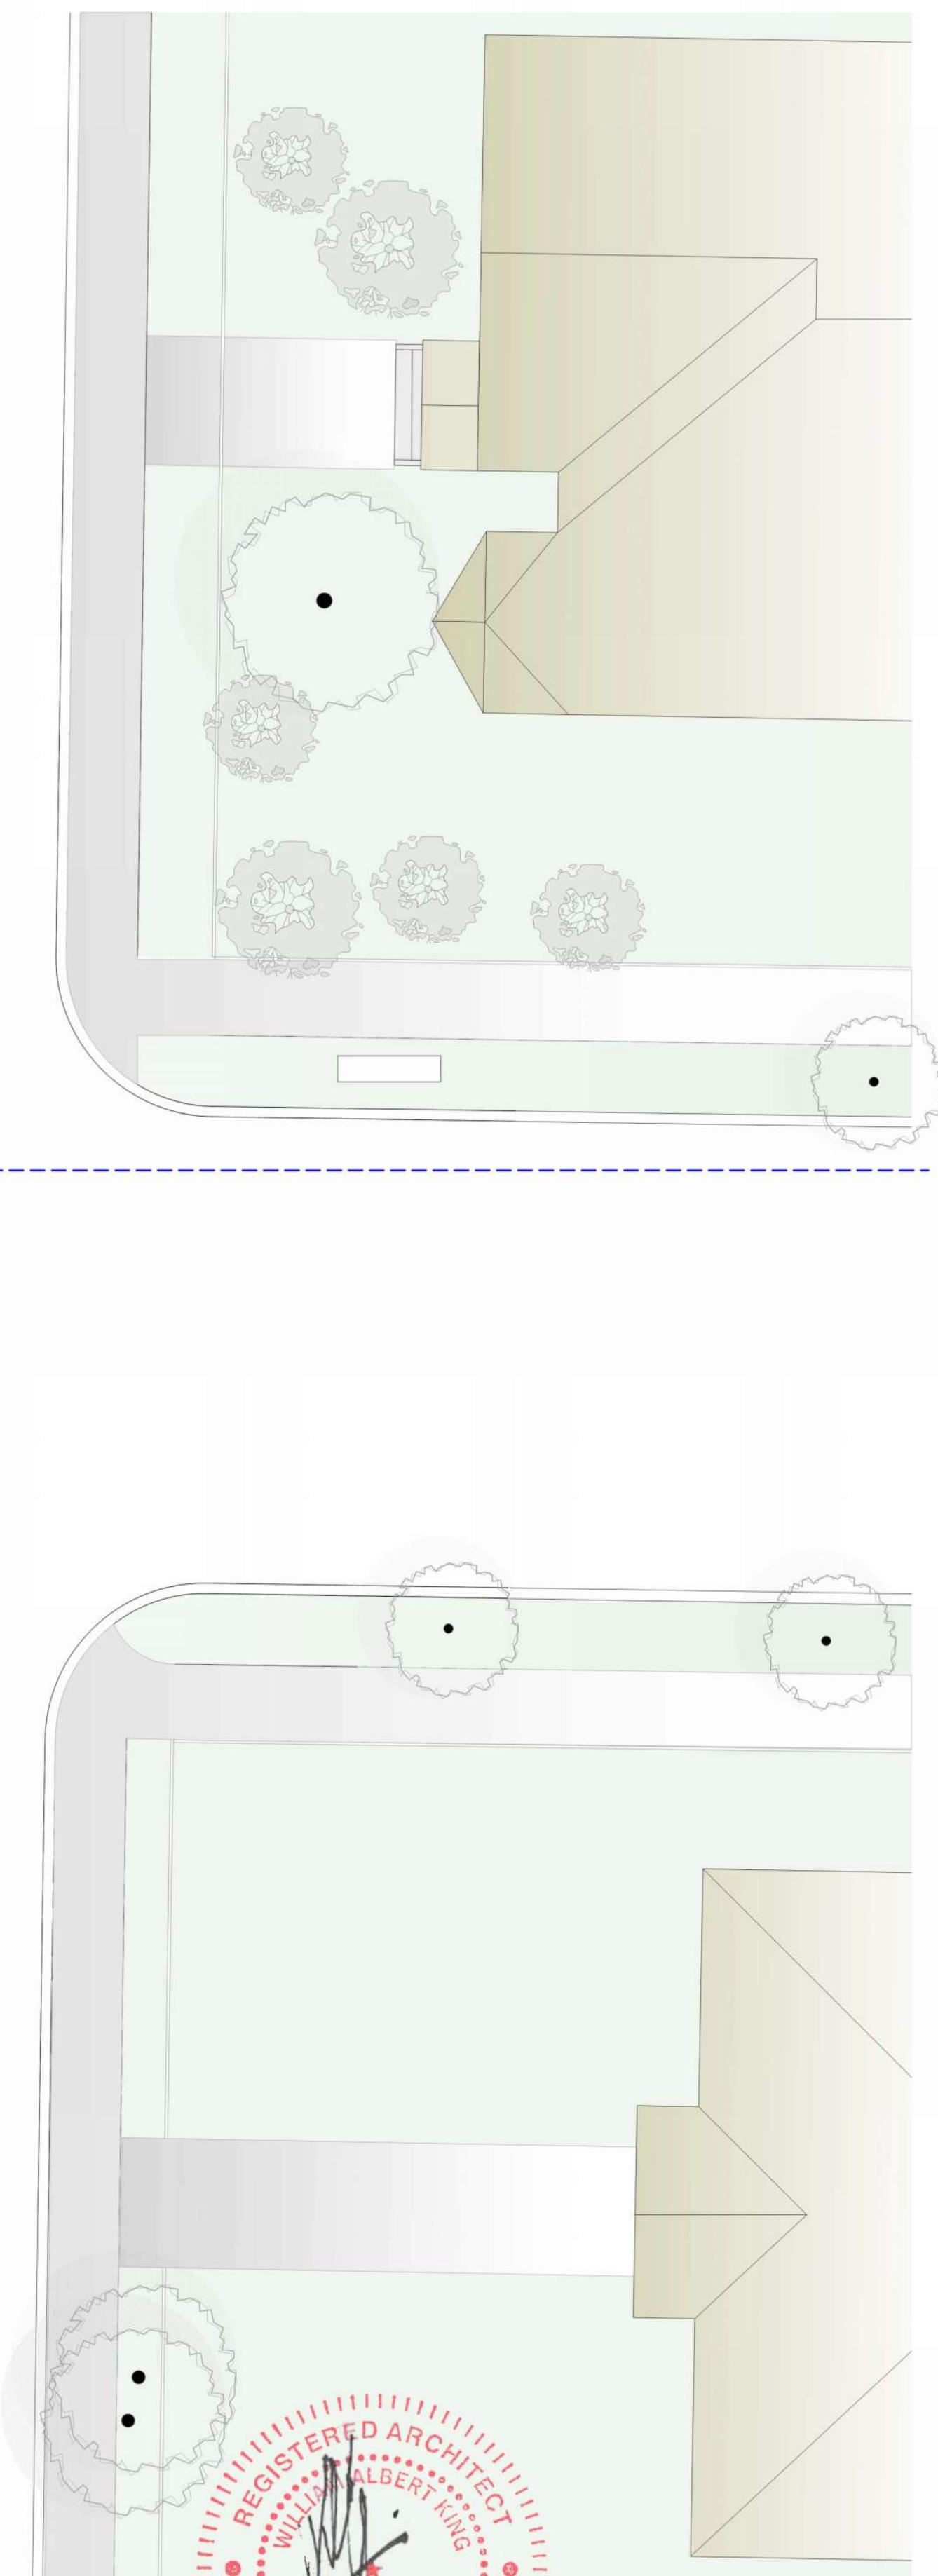


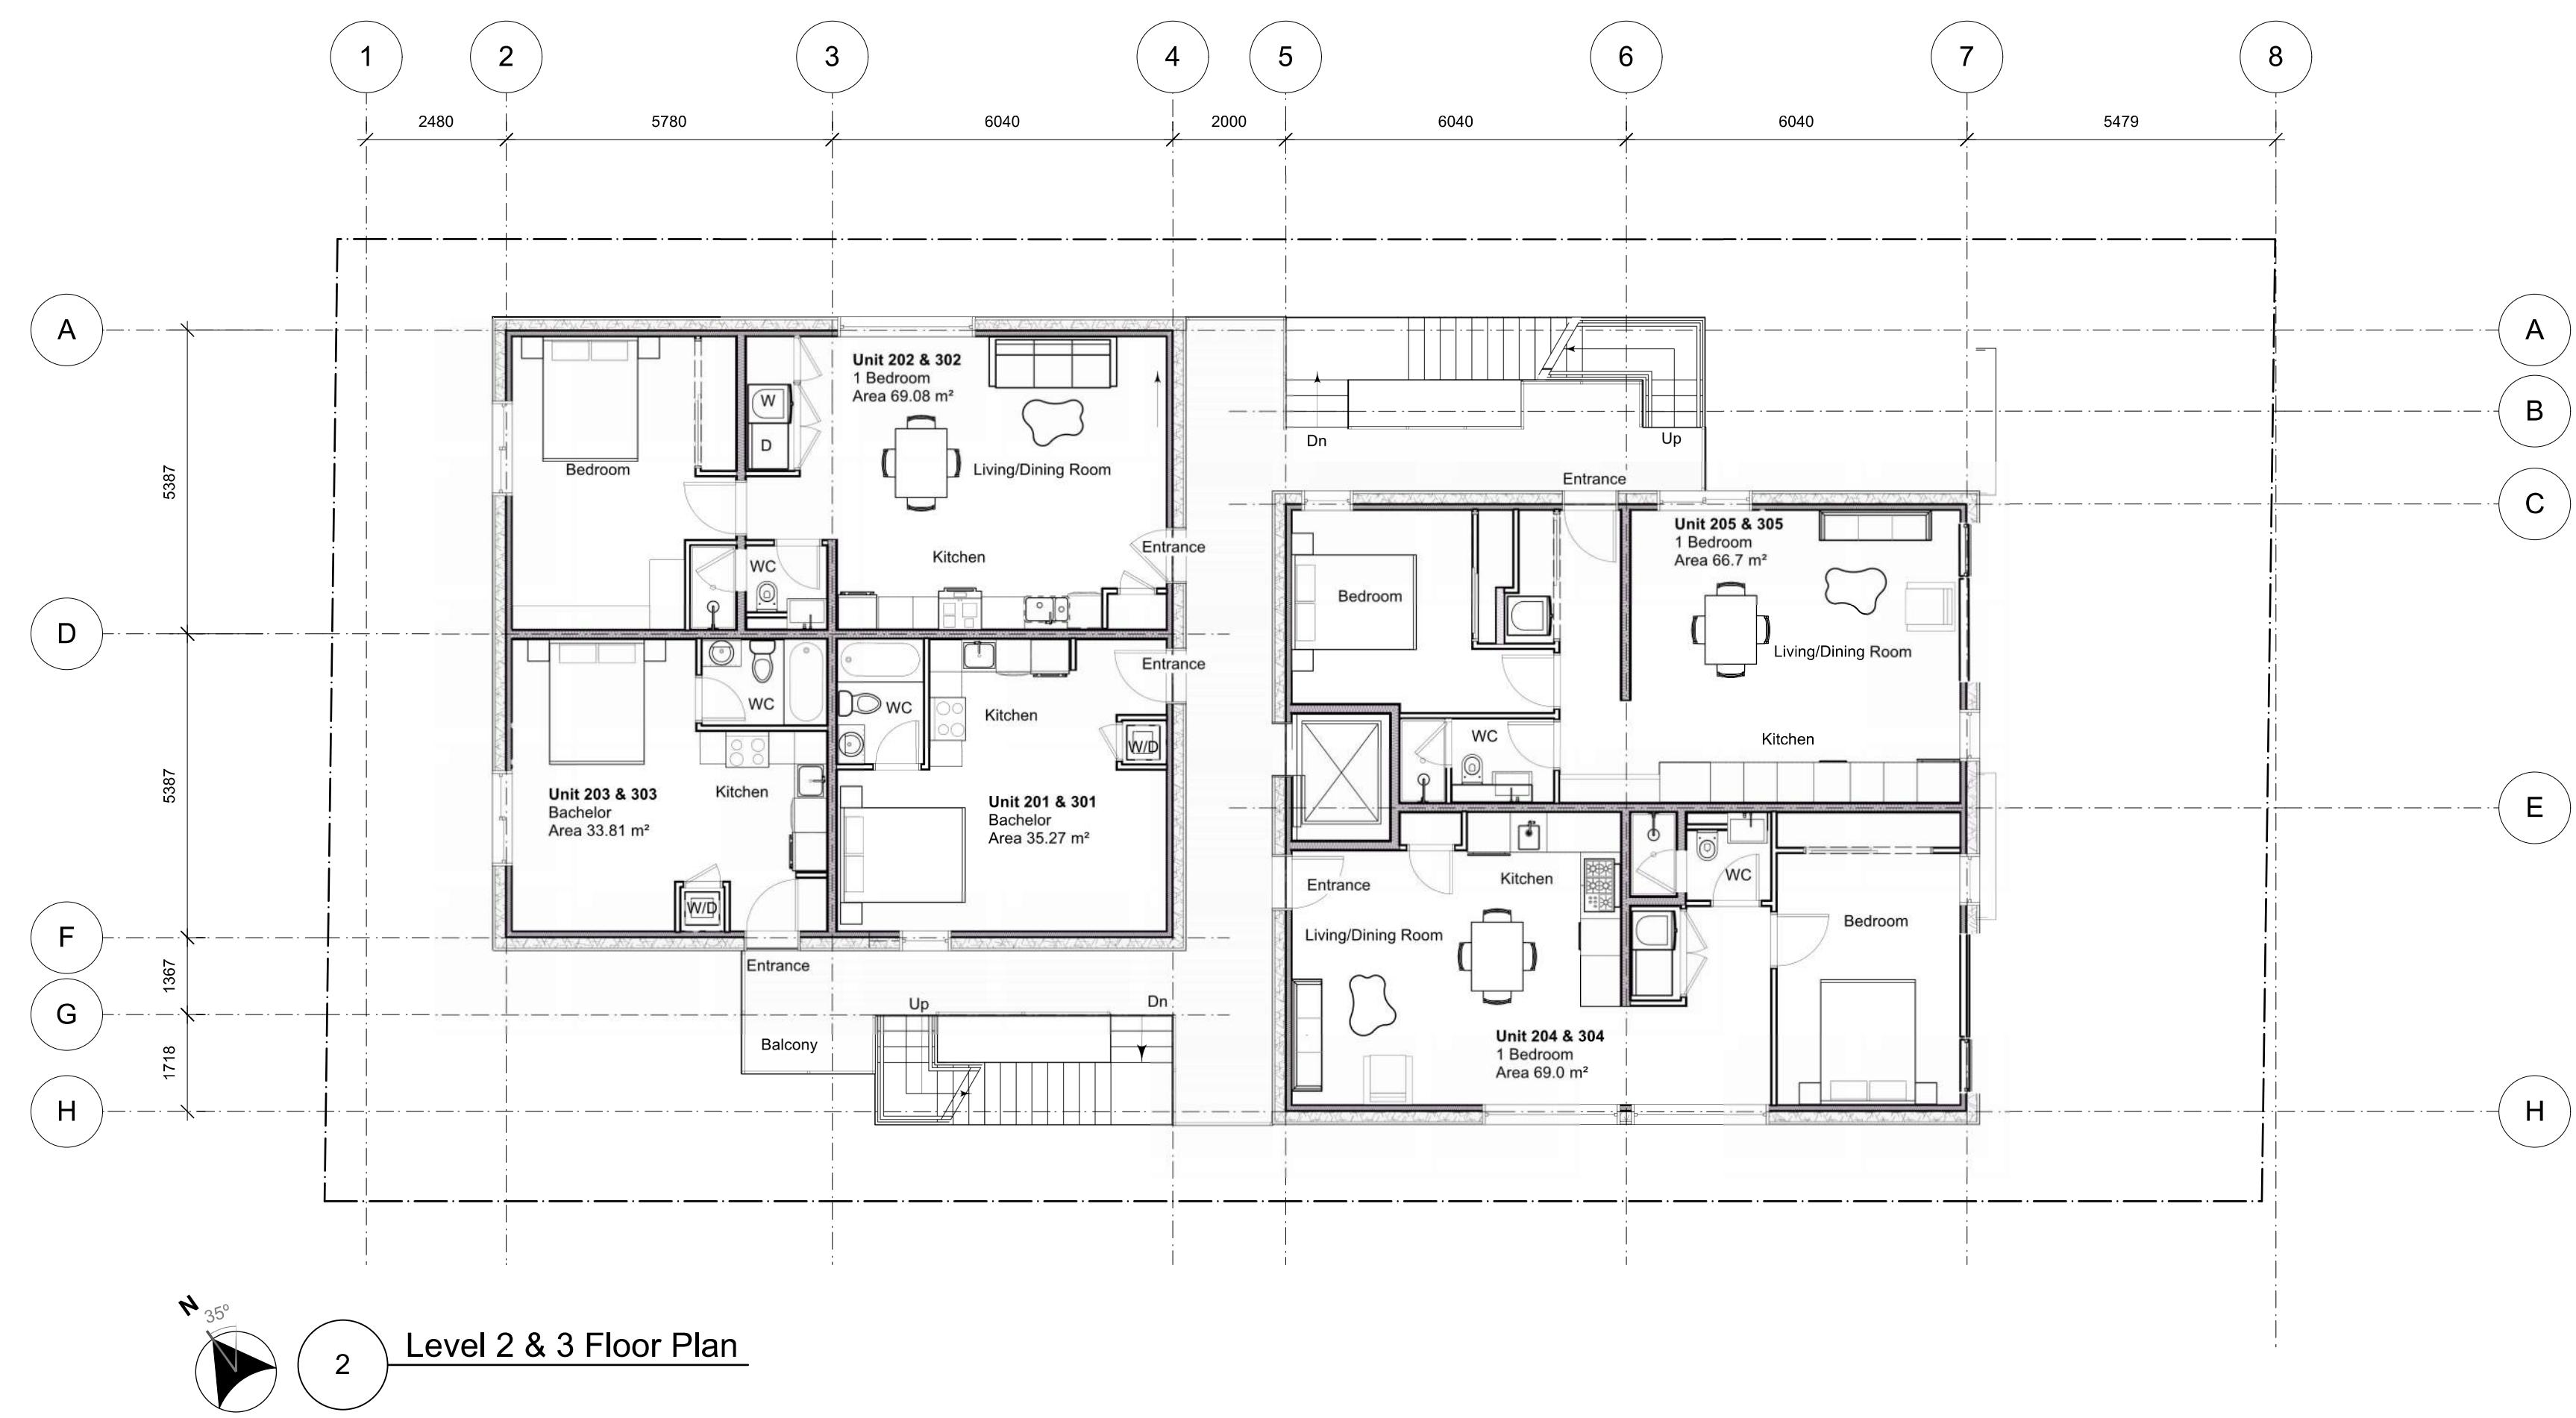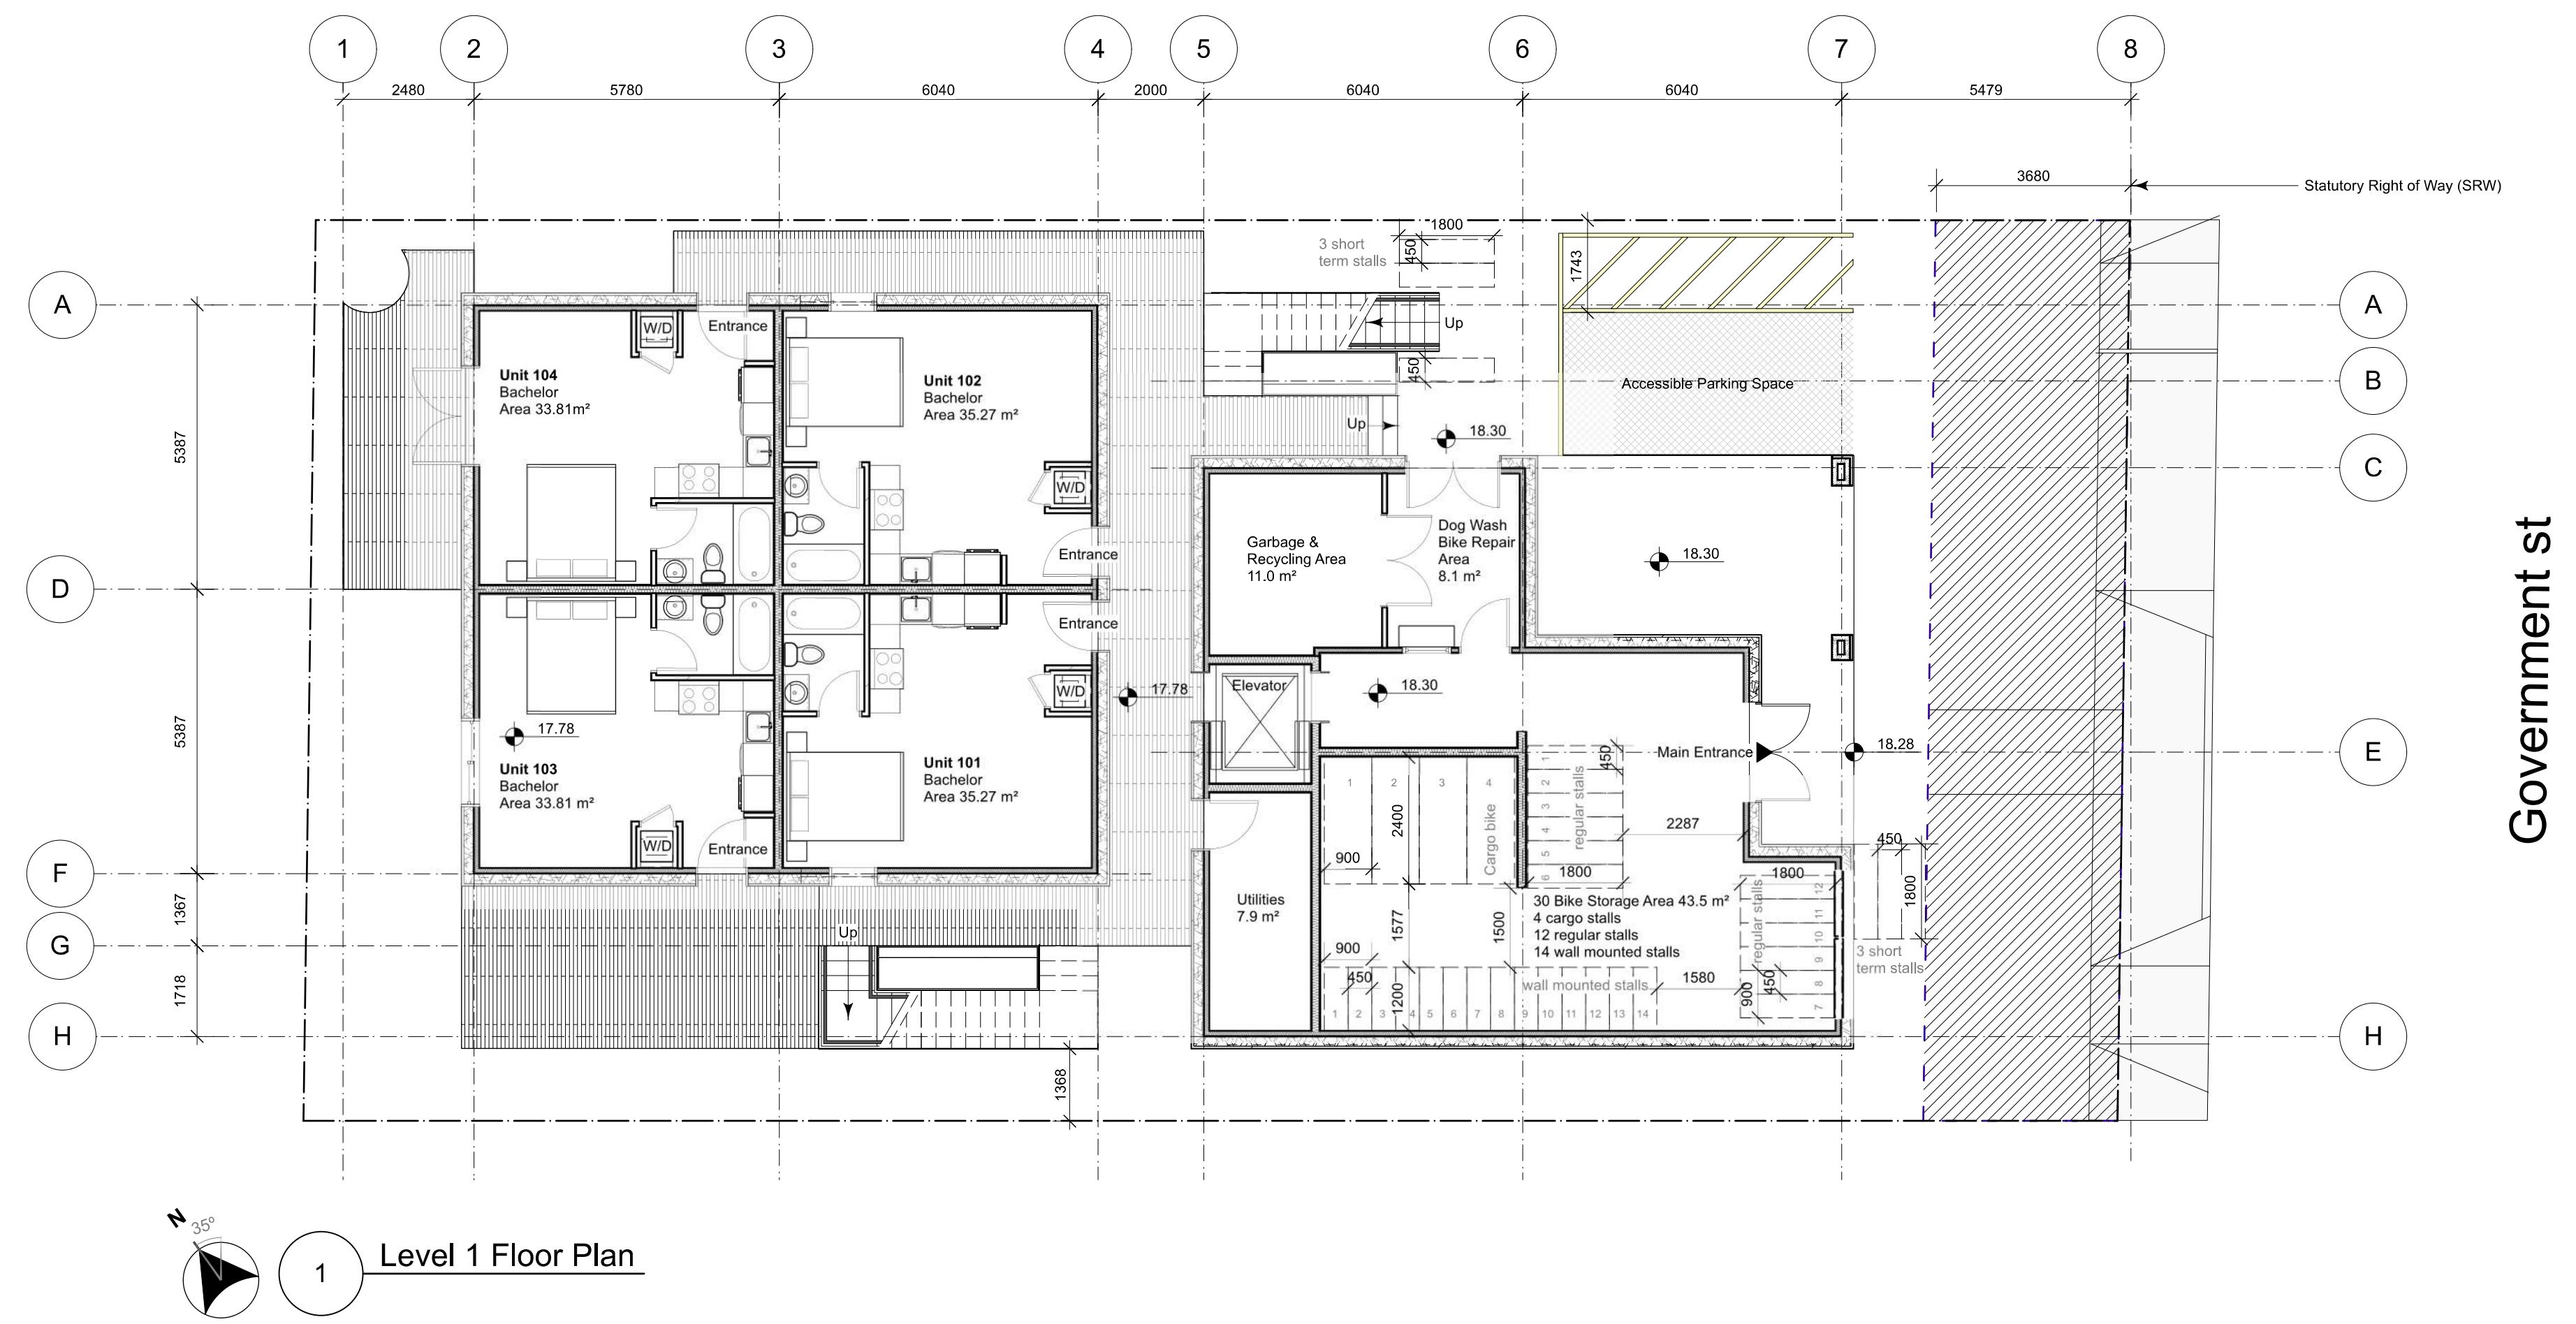

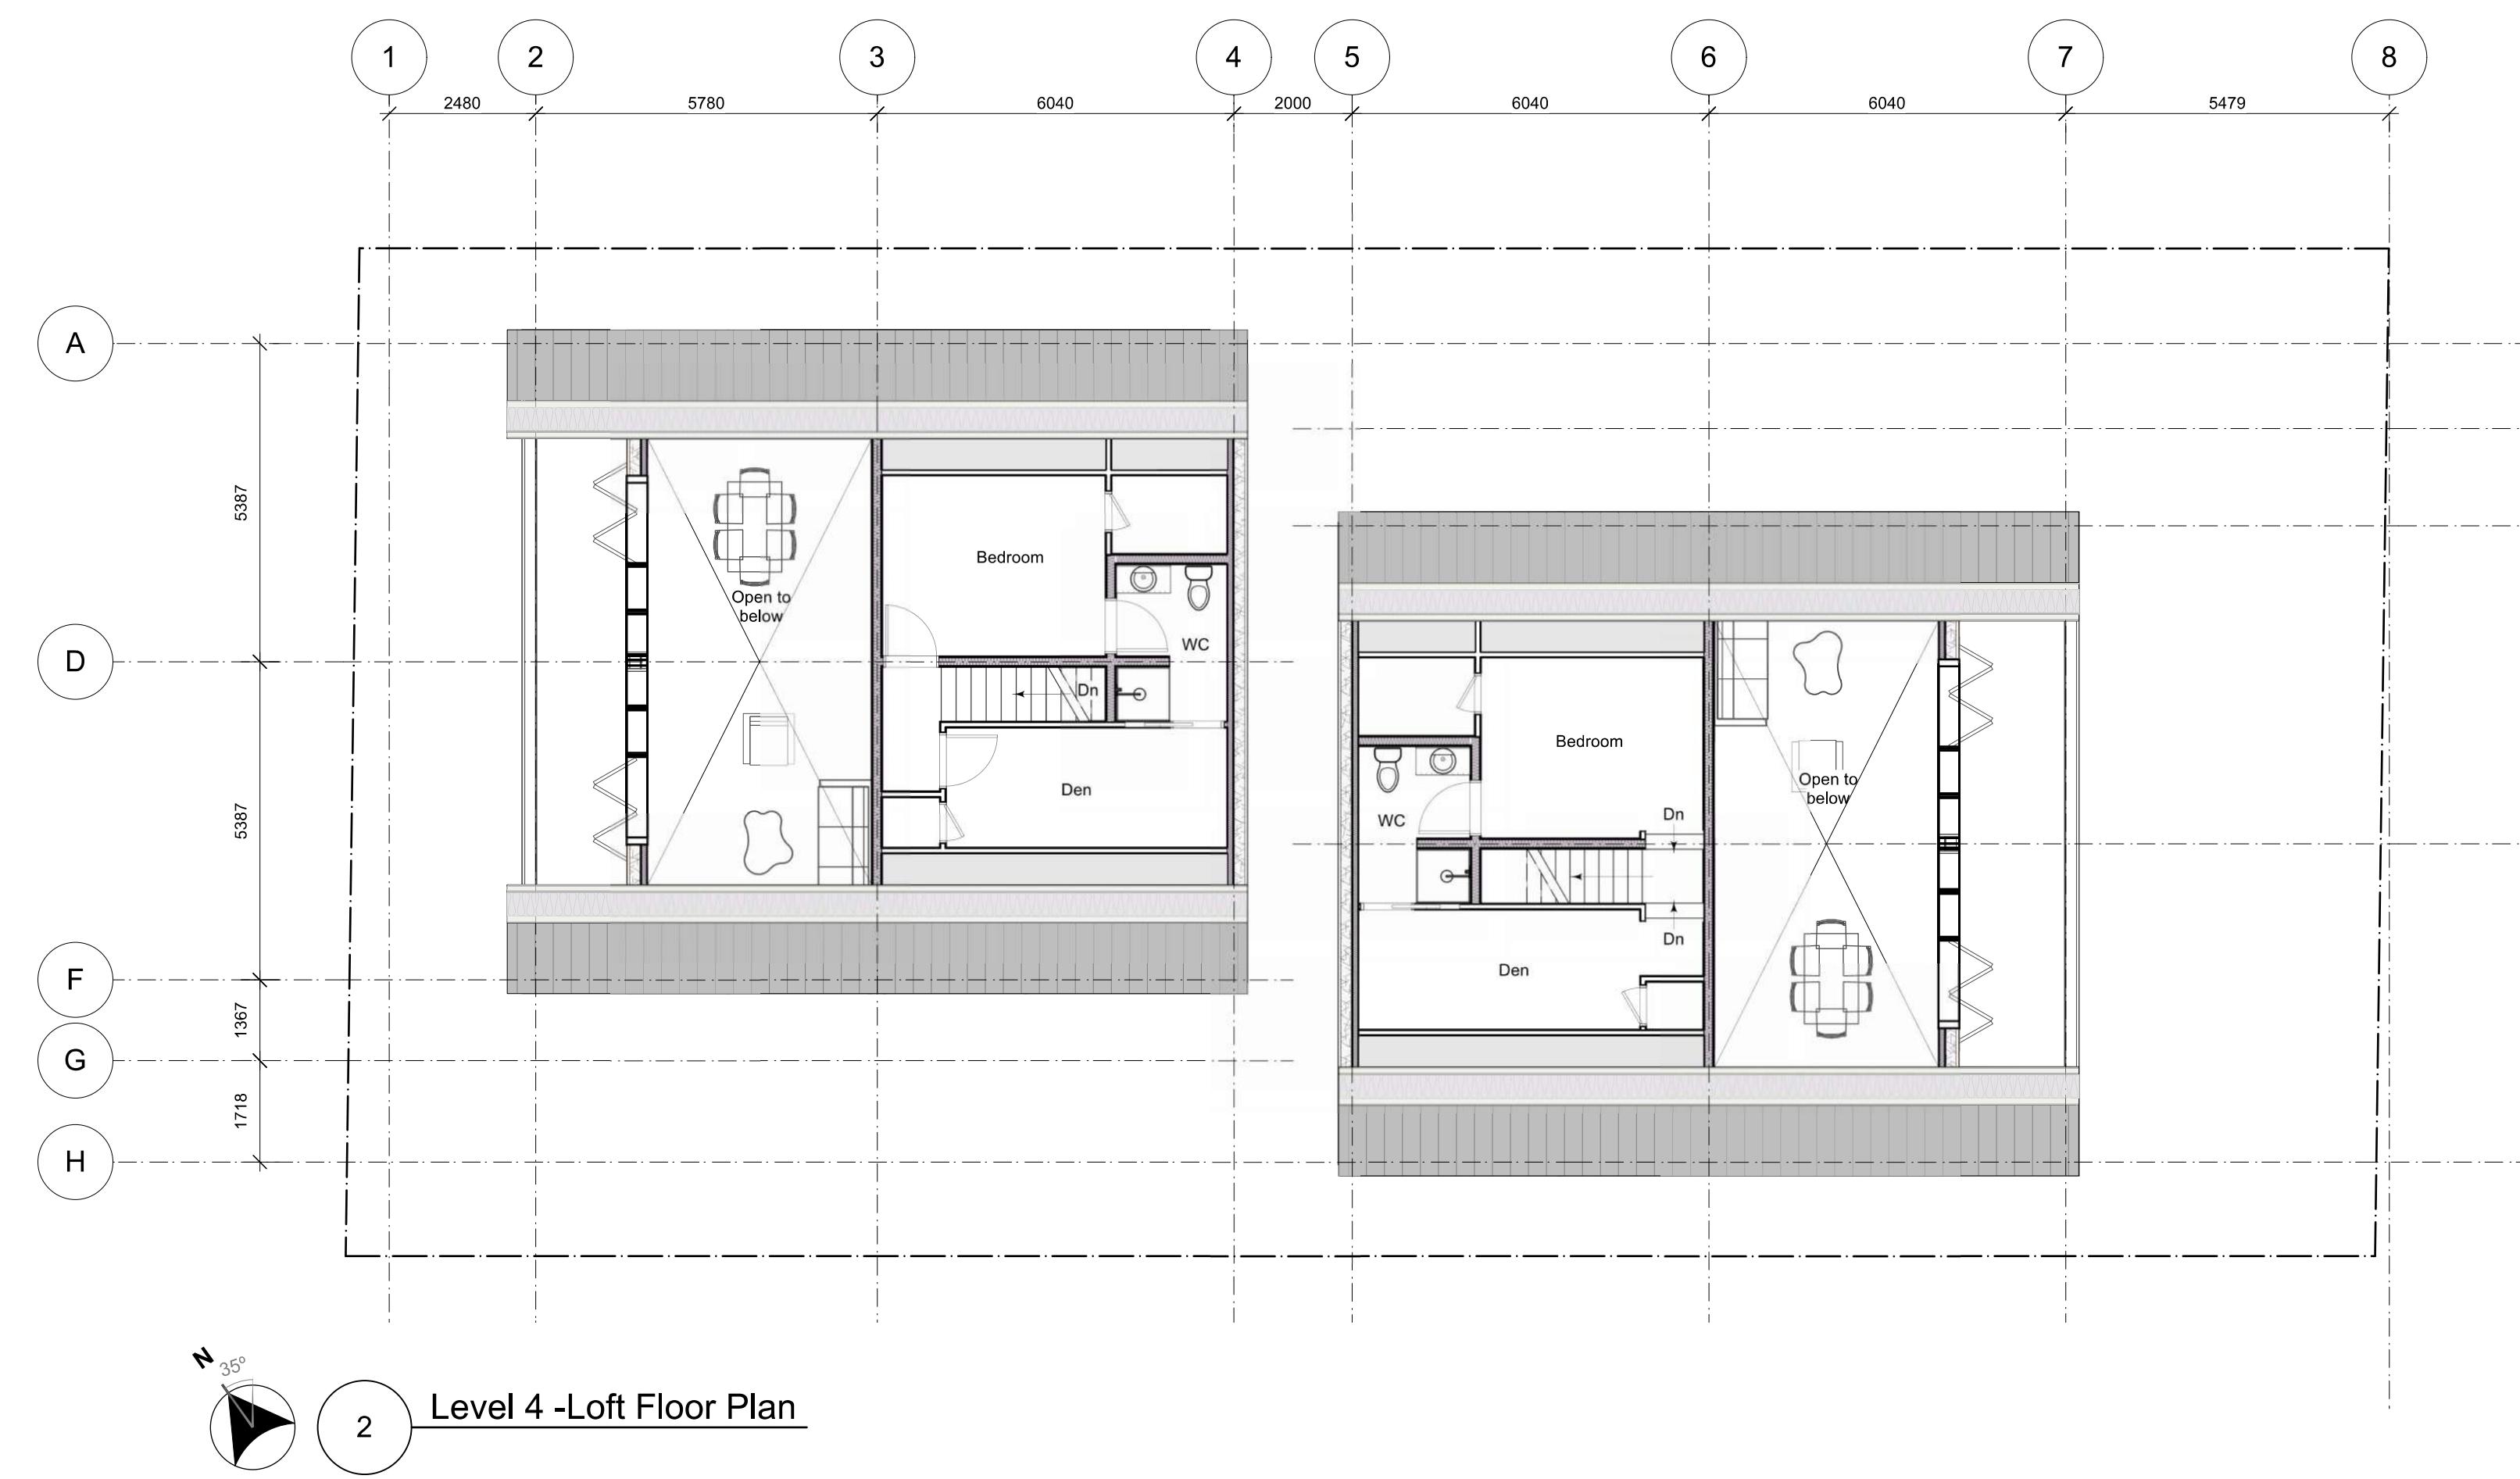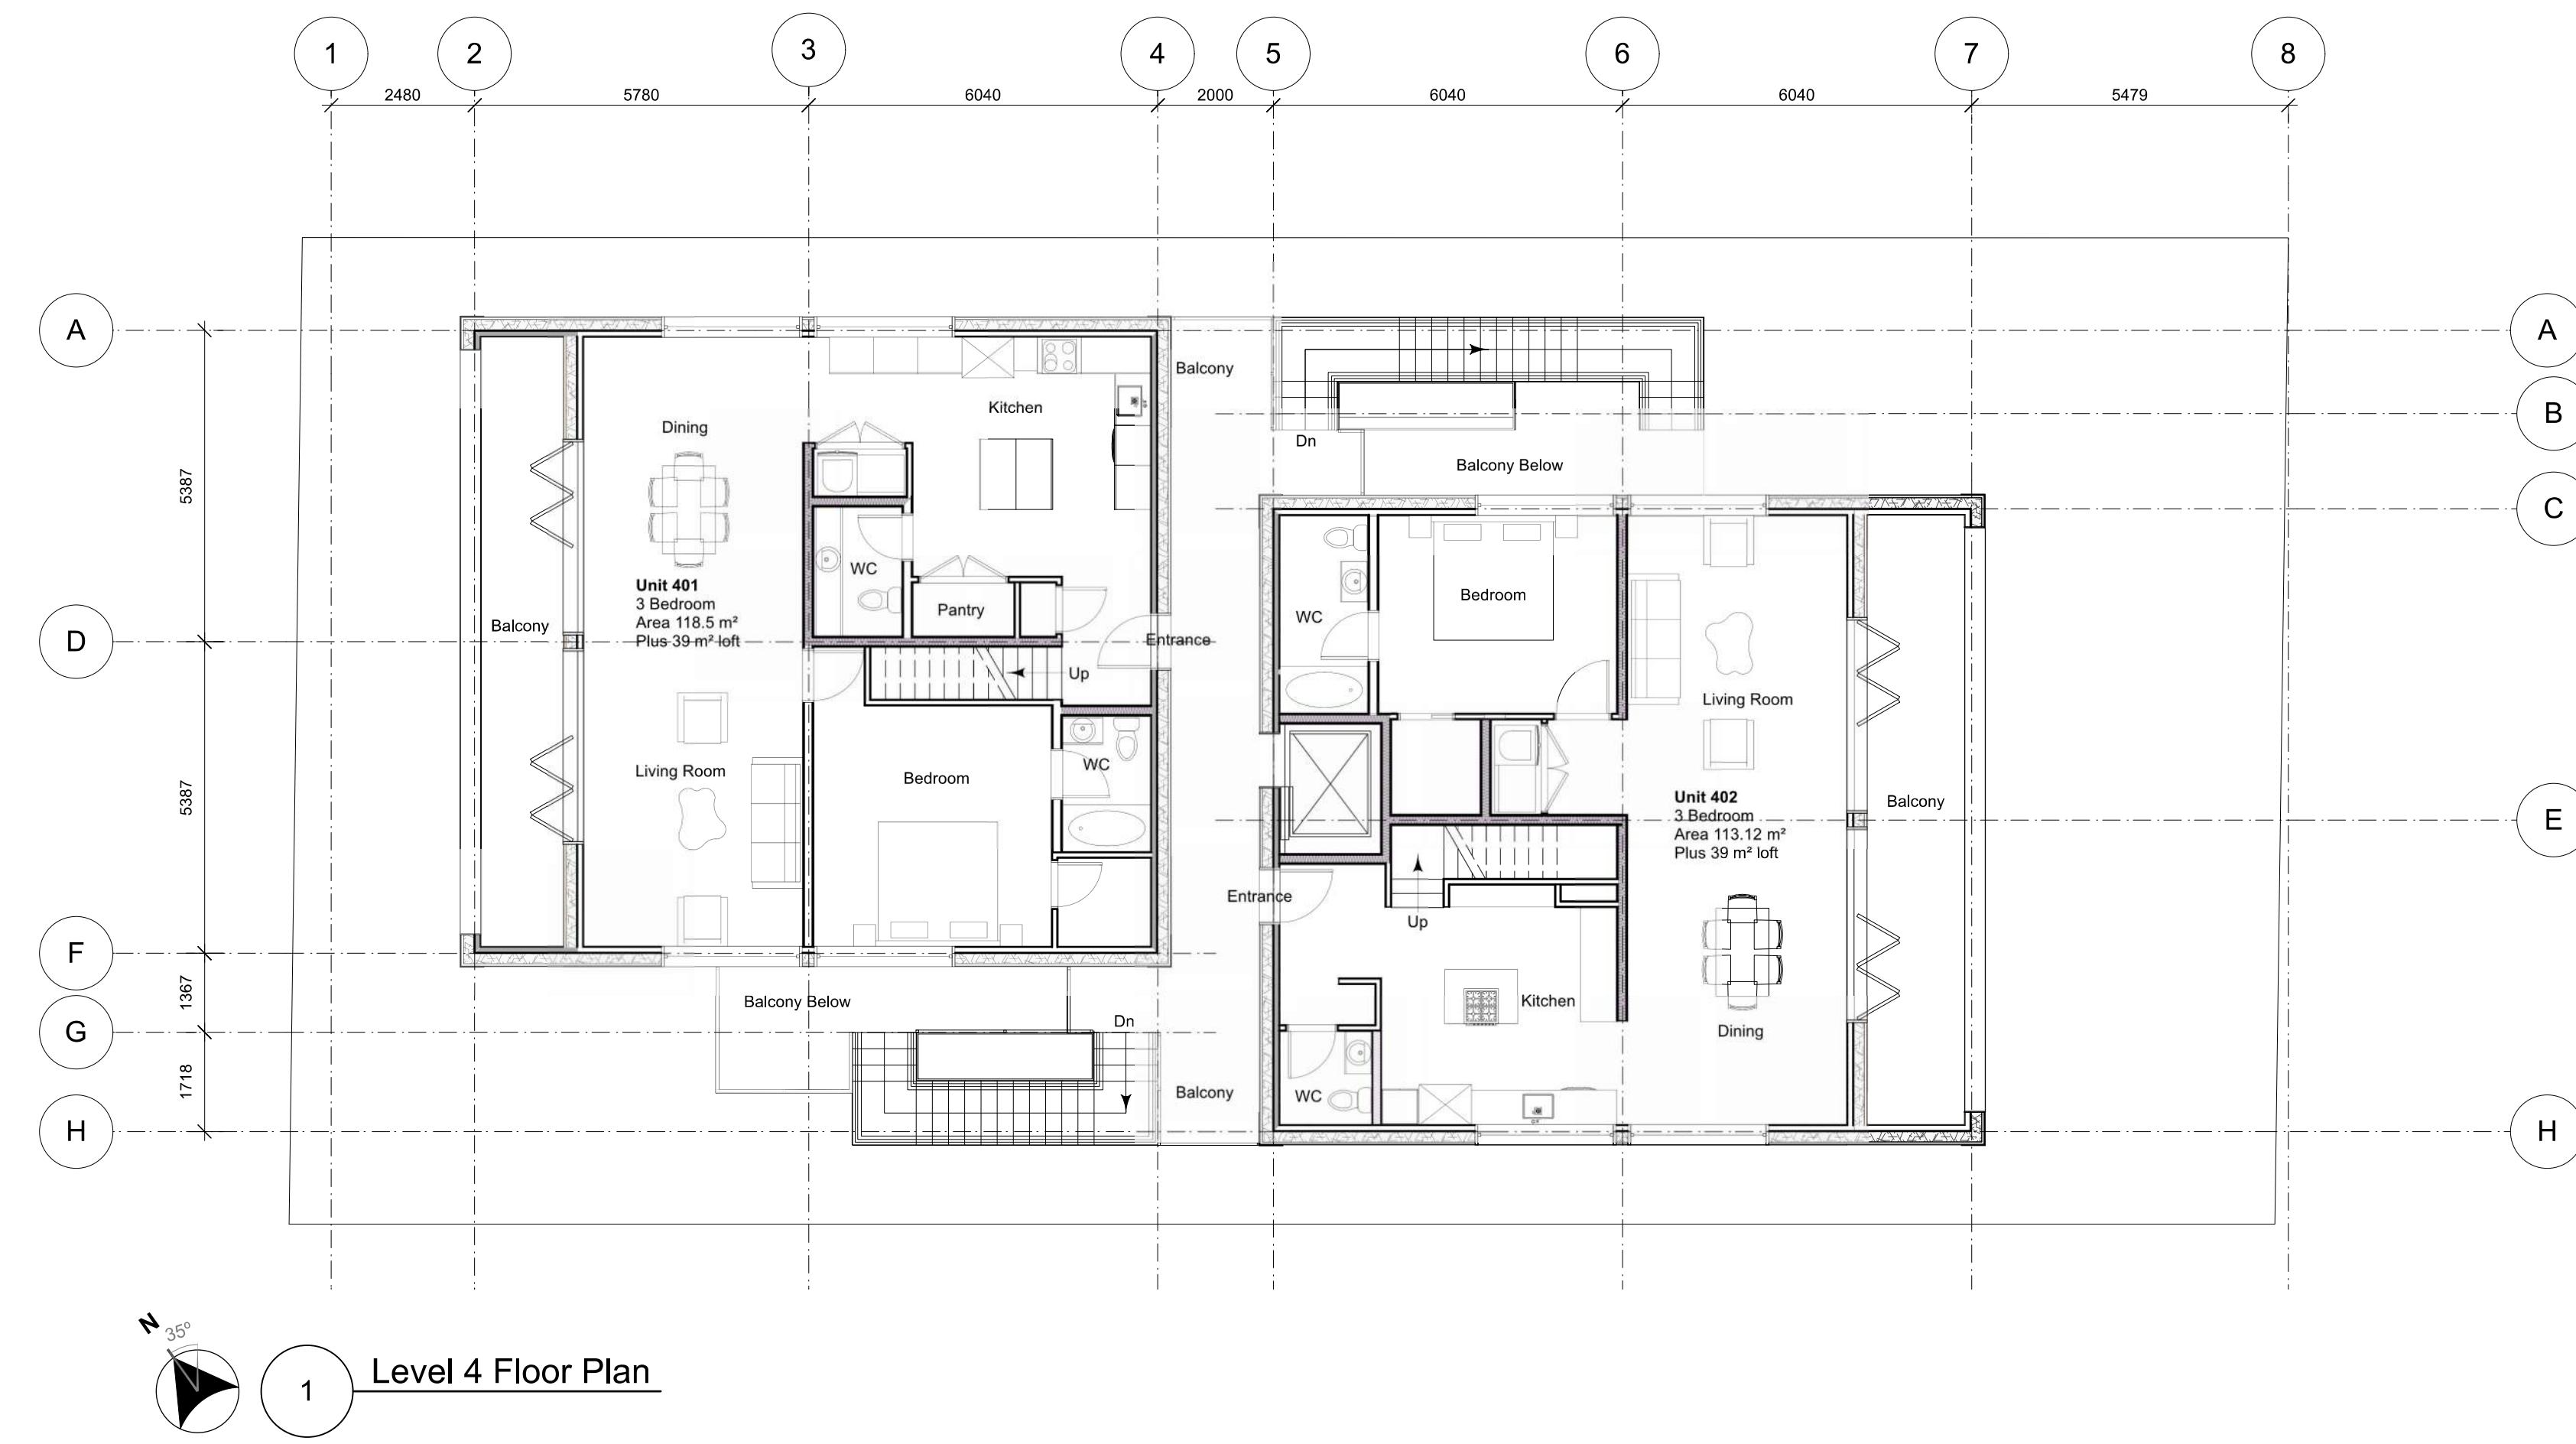

Oeza Developments


James Bay Development

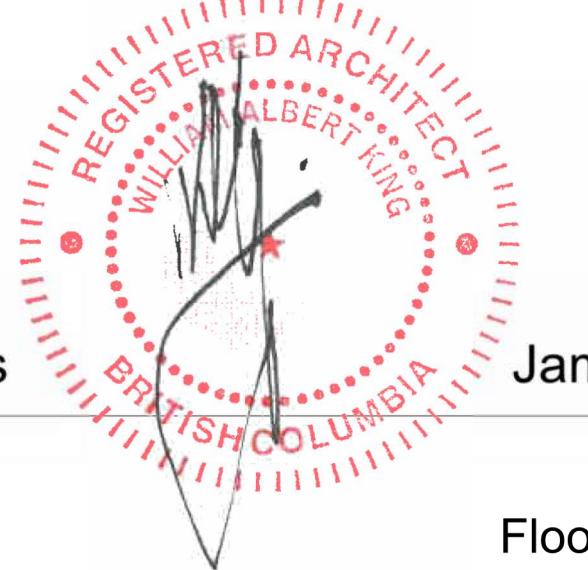


2024-09-27

RZ-102


Floor Plans L4 and Loft Plan

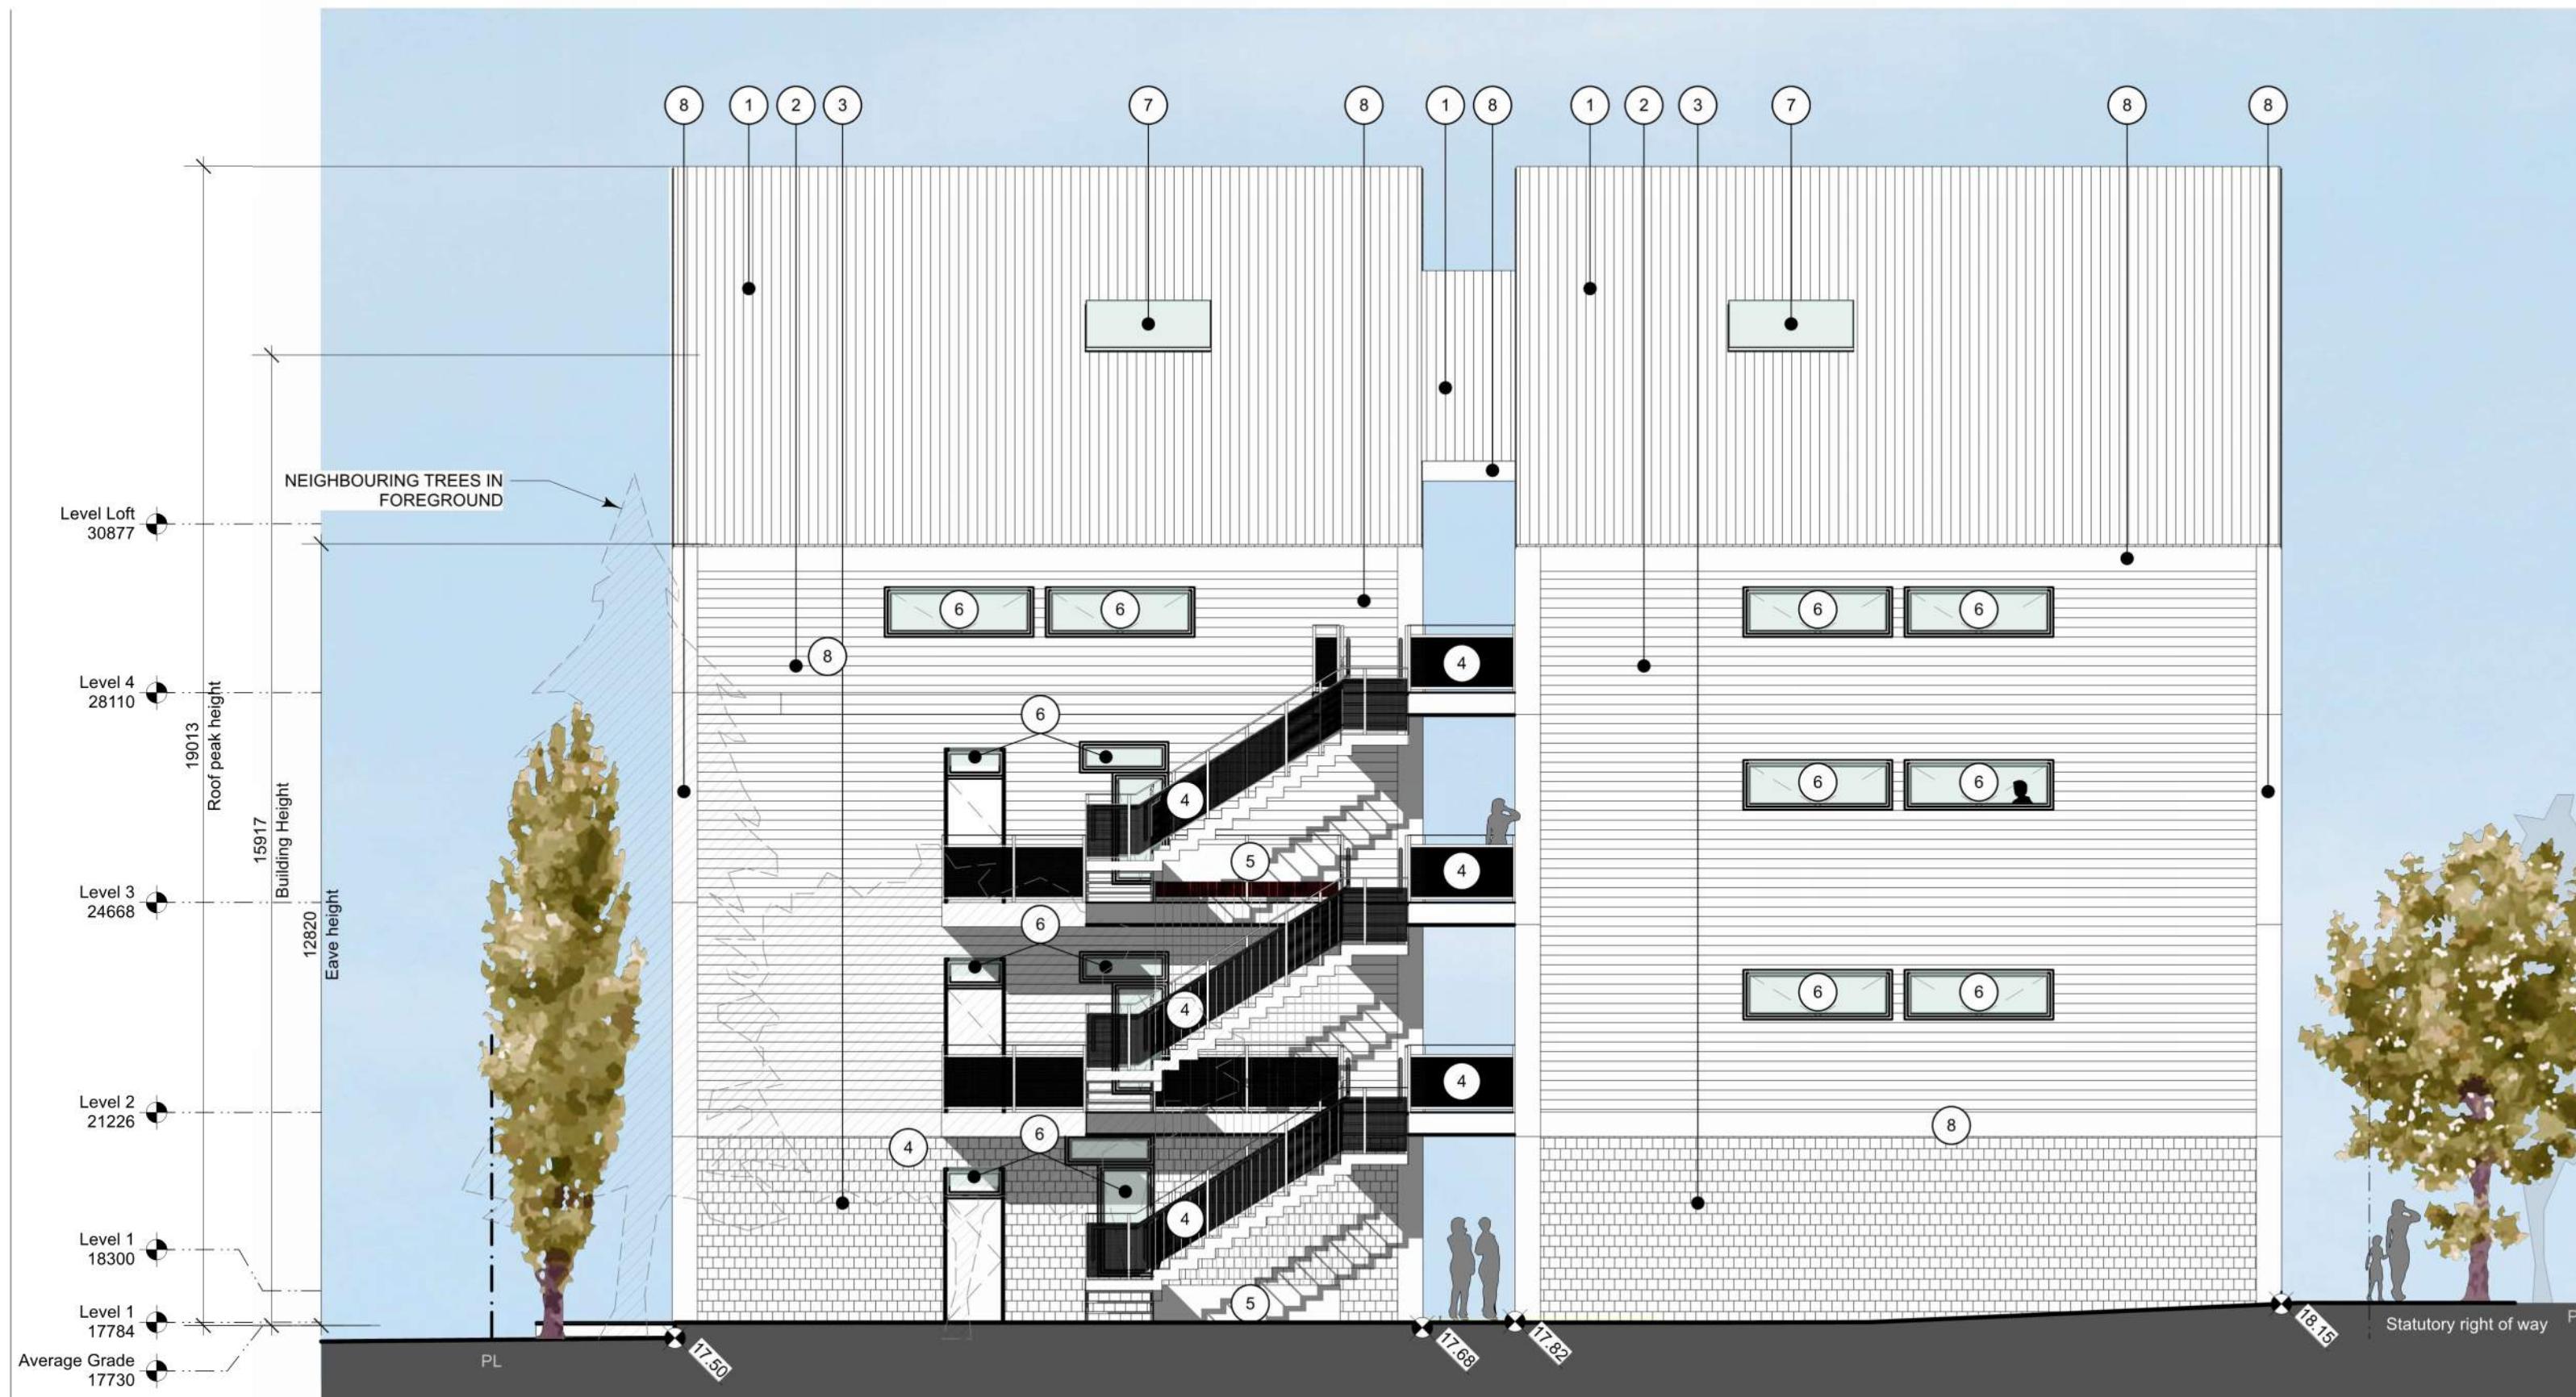


3 South Elevation  
Scale: 1:100

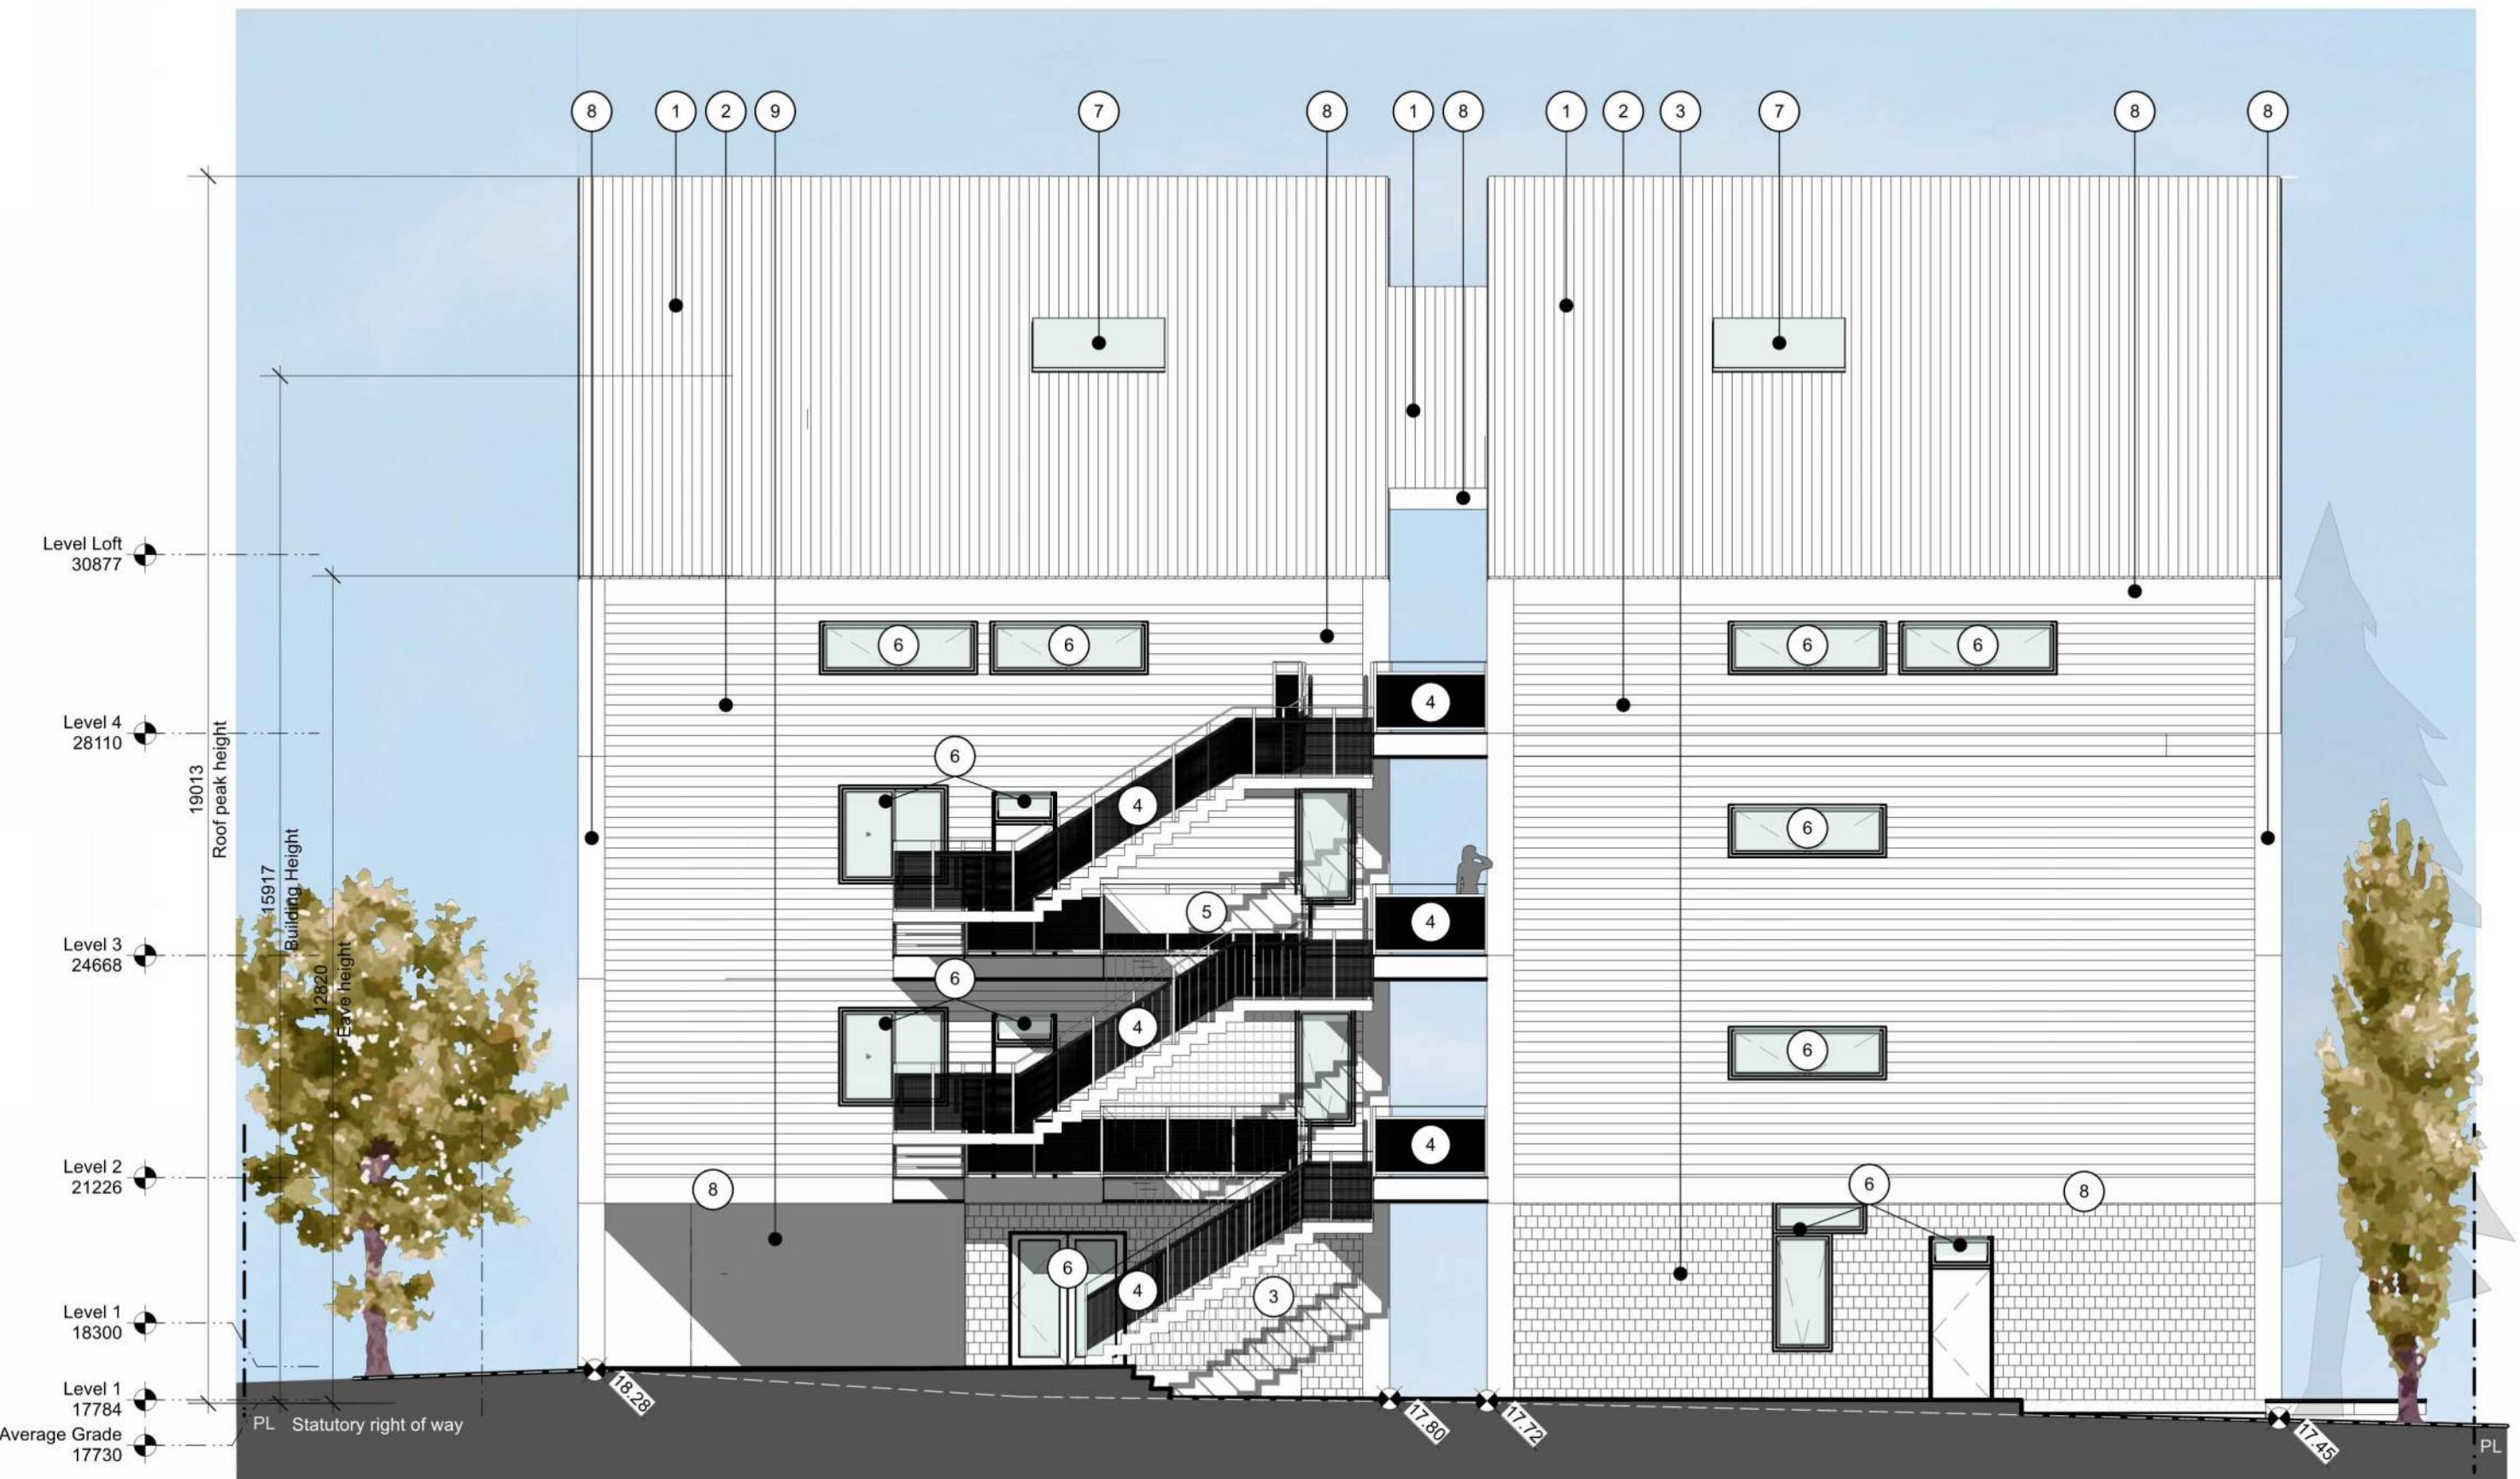

2 North Elevation  
Scale: 1:100

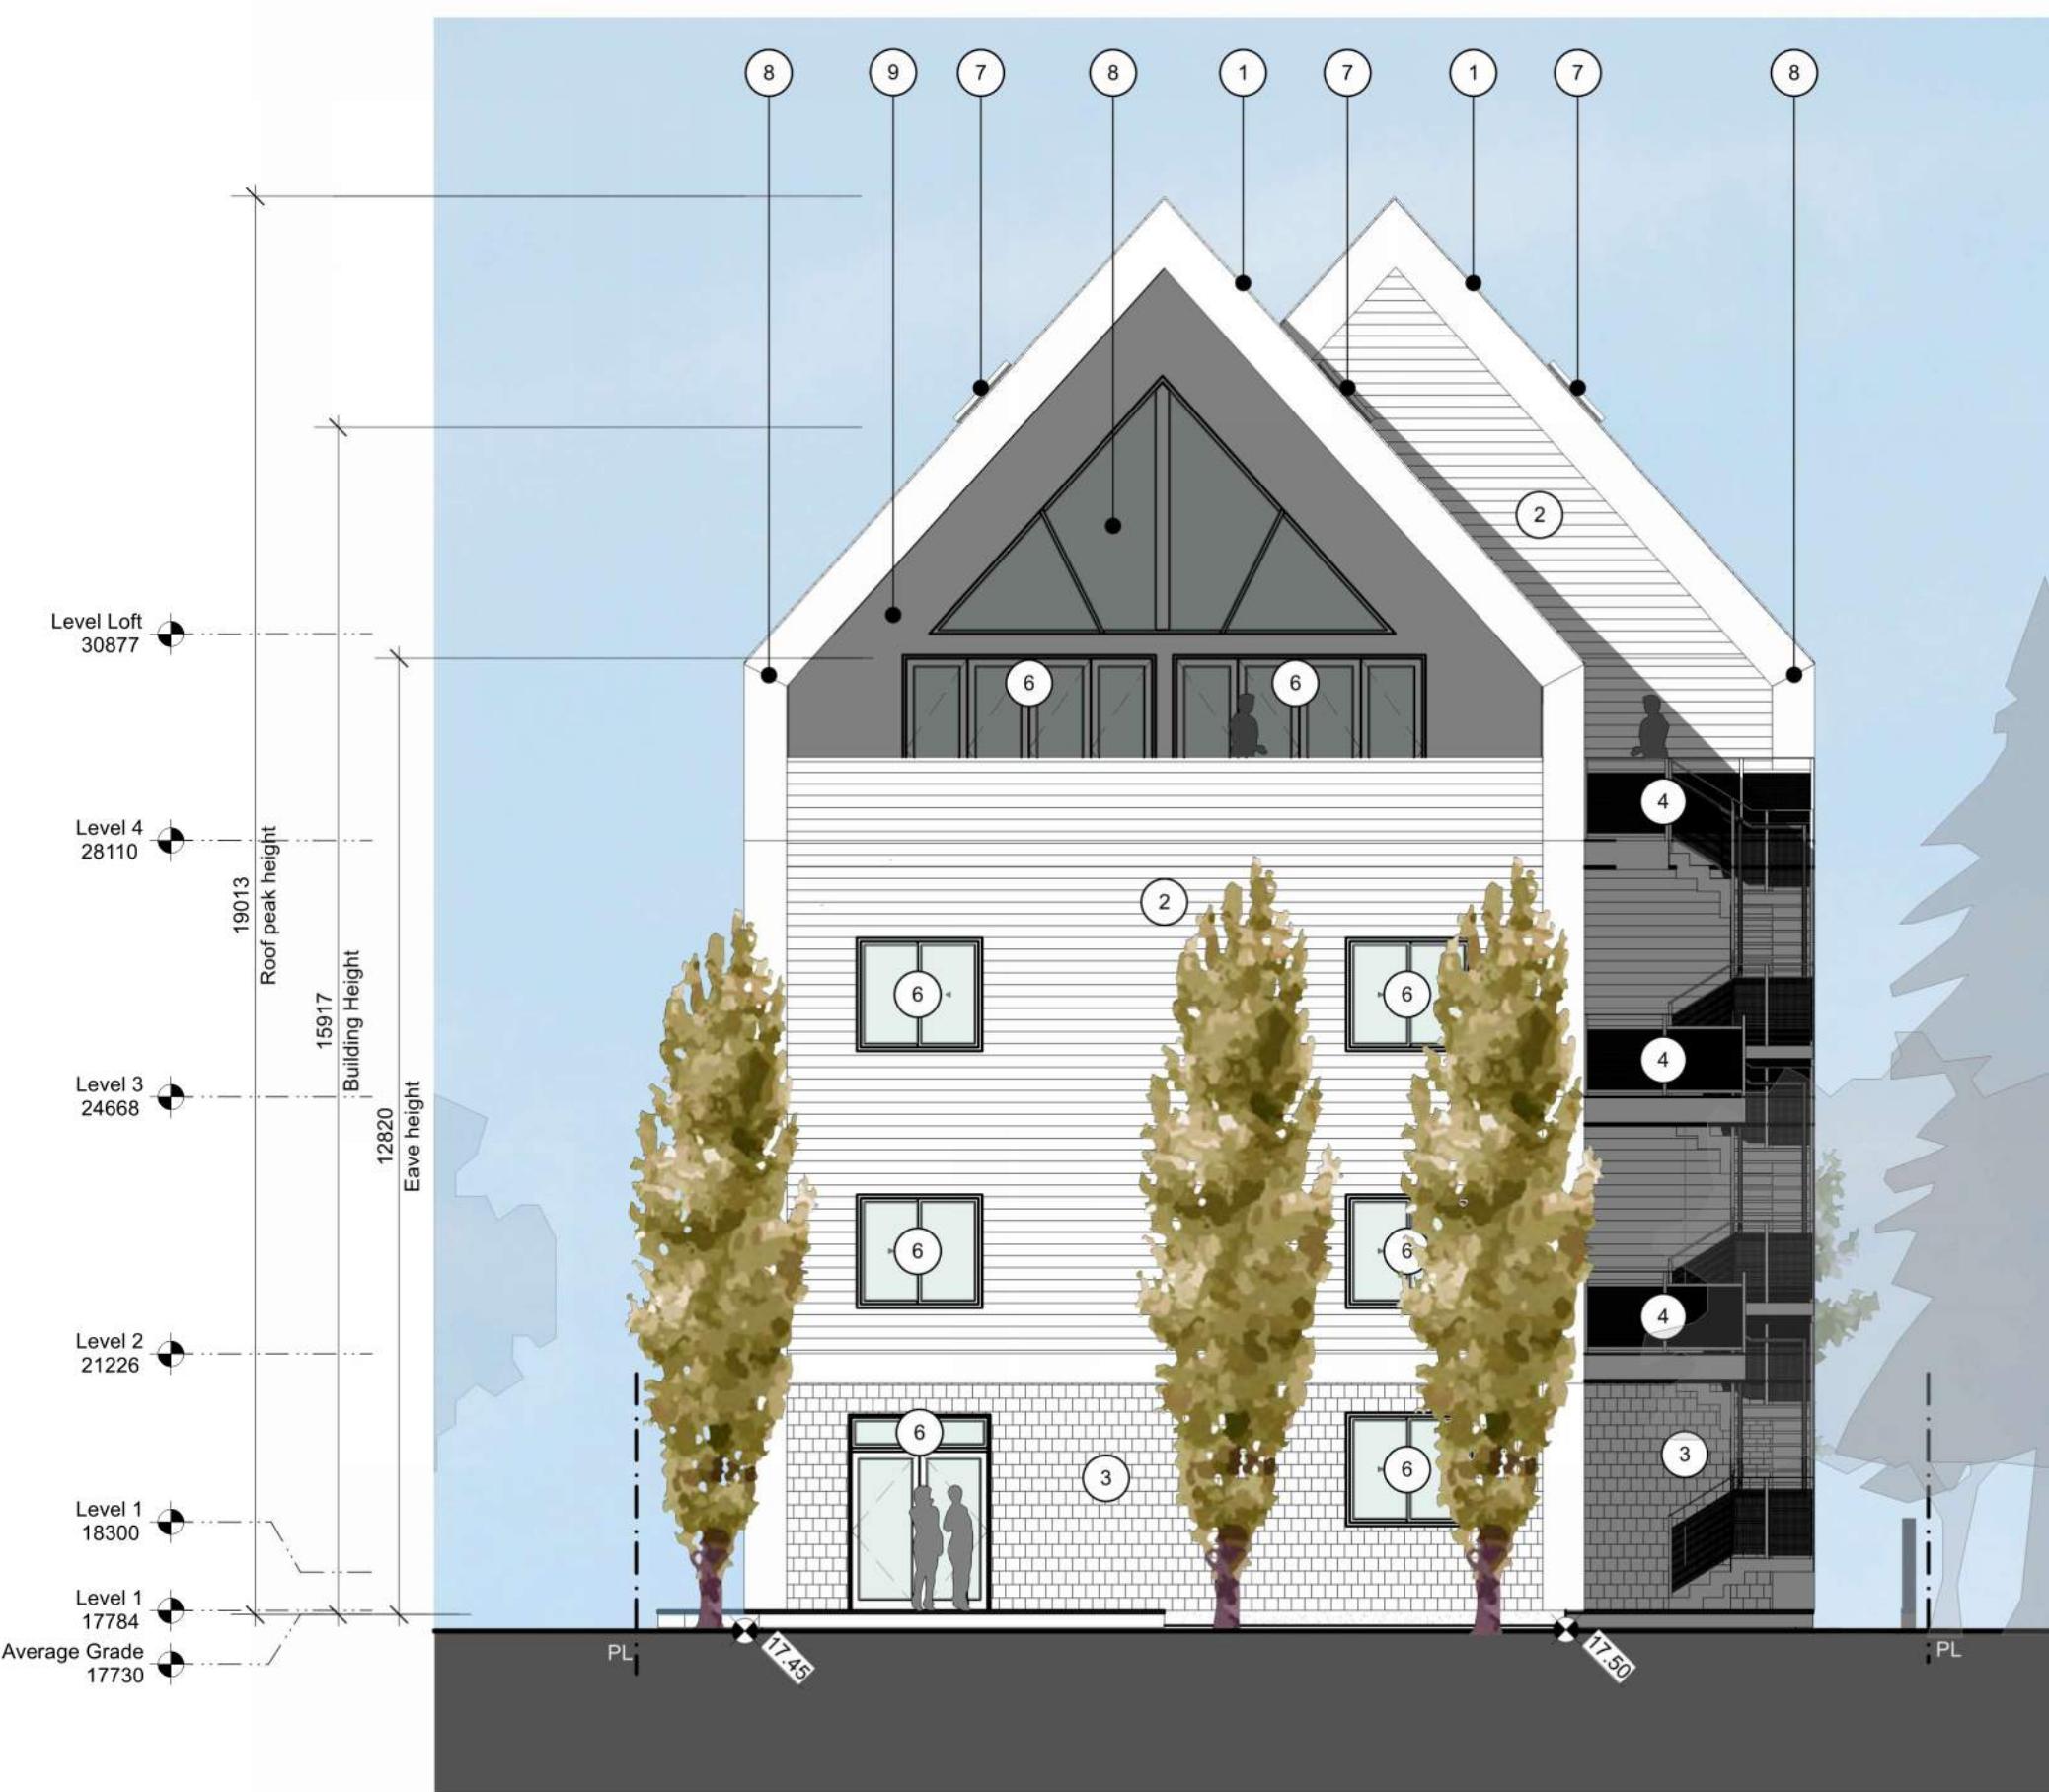

3 Rear Elevation  
Scale: 1:100

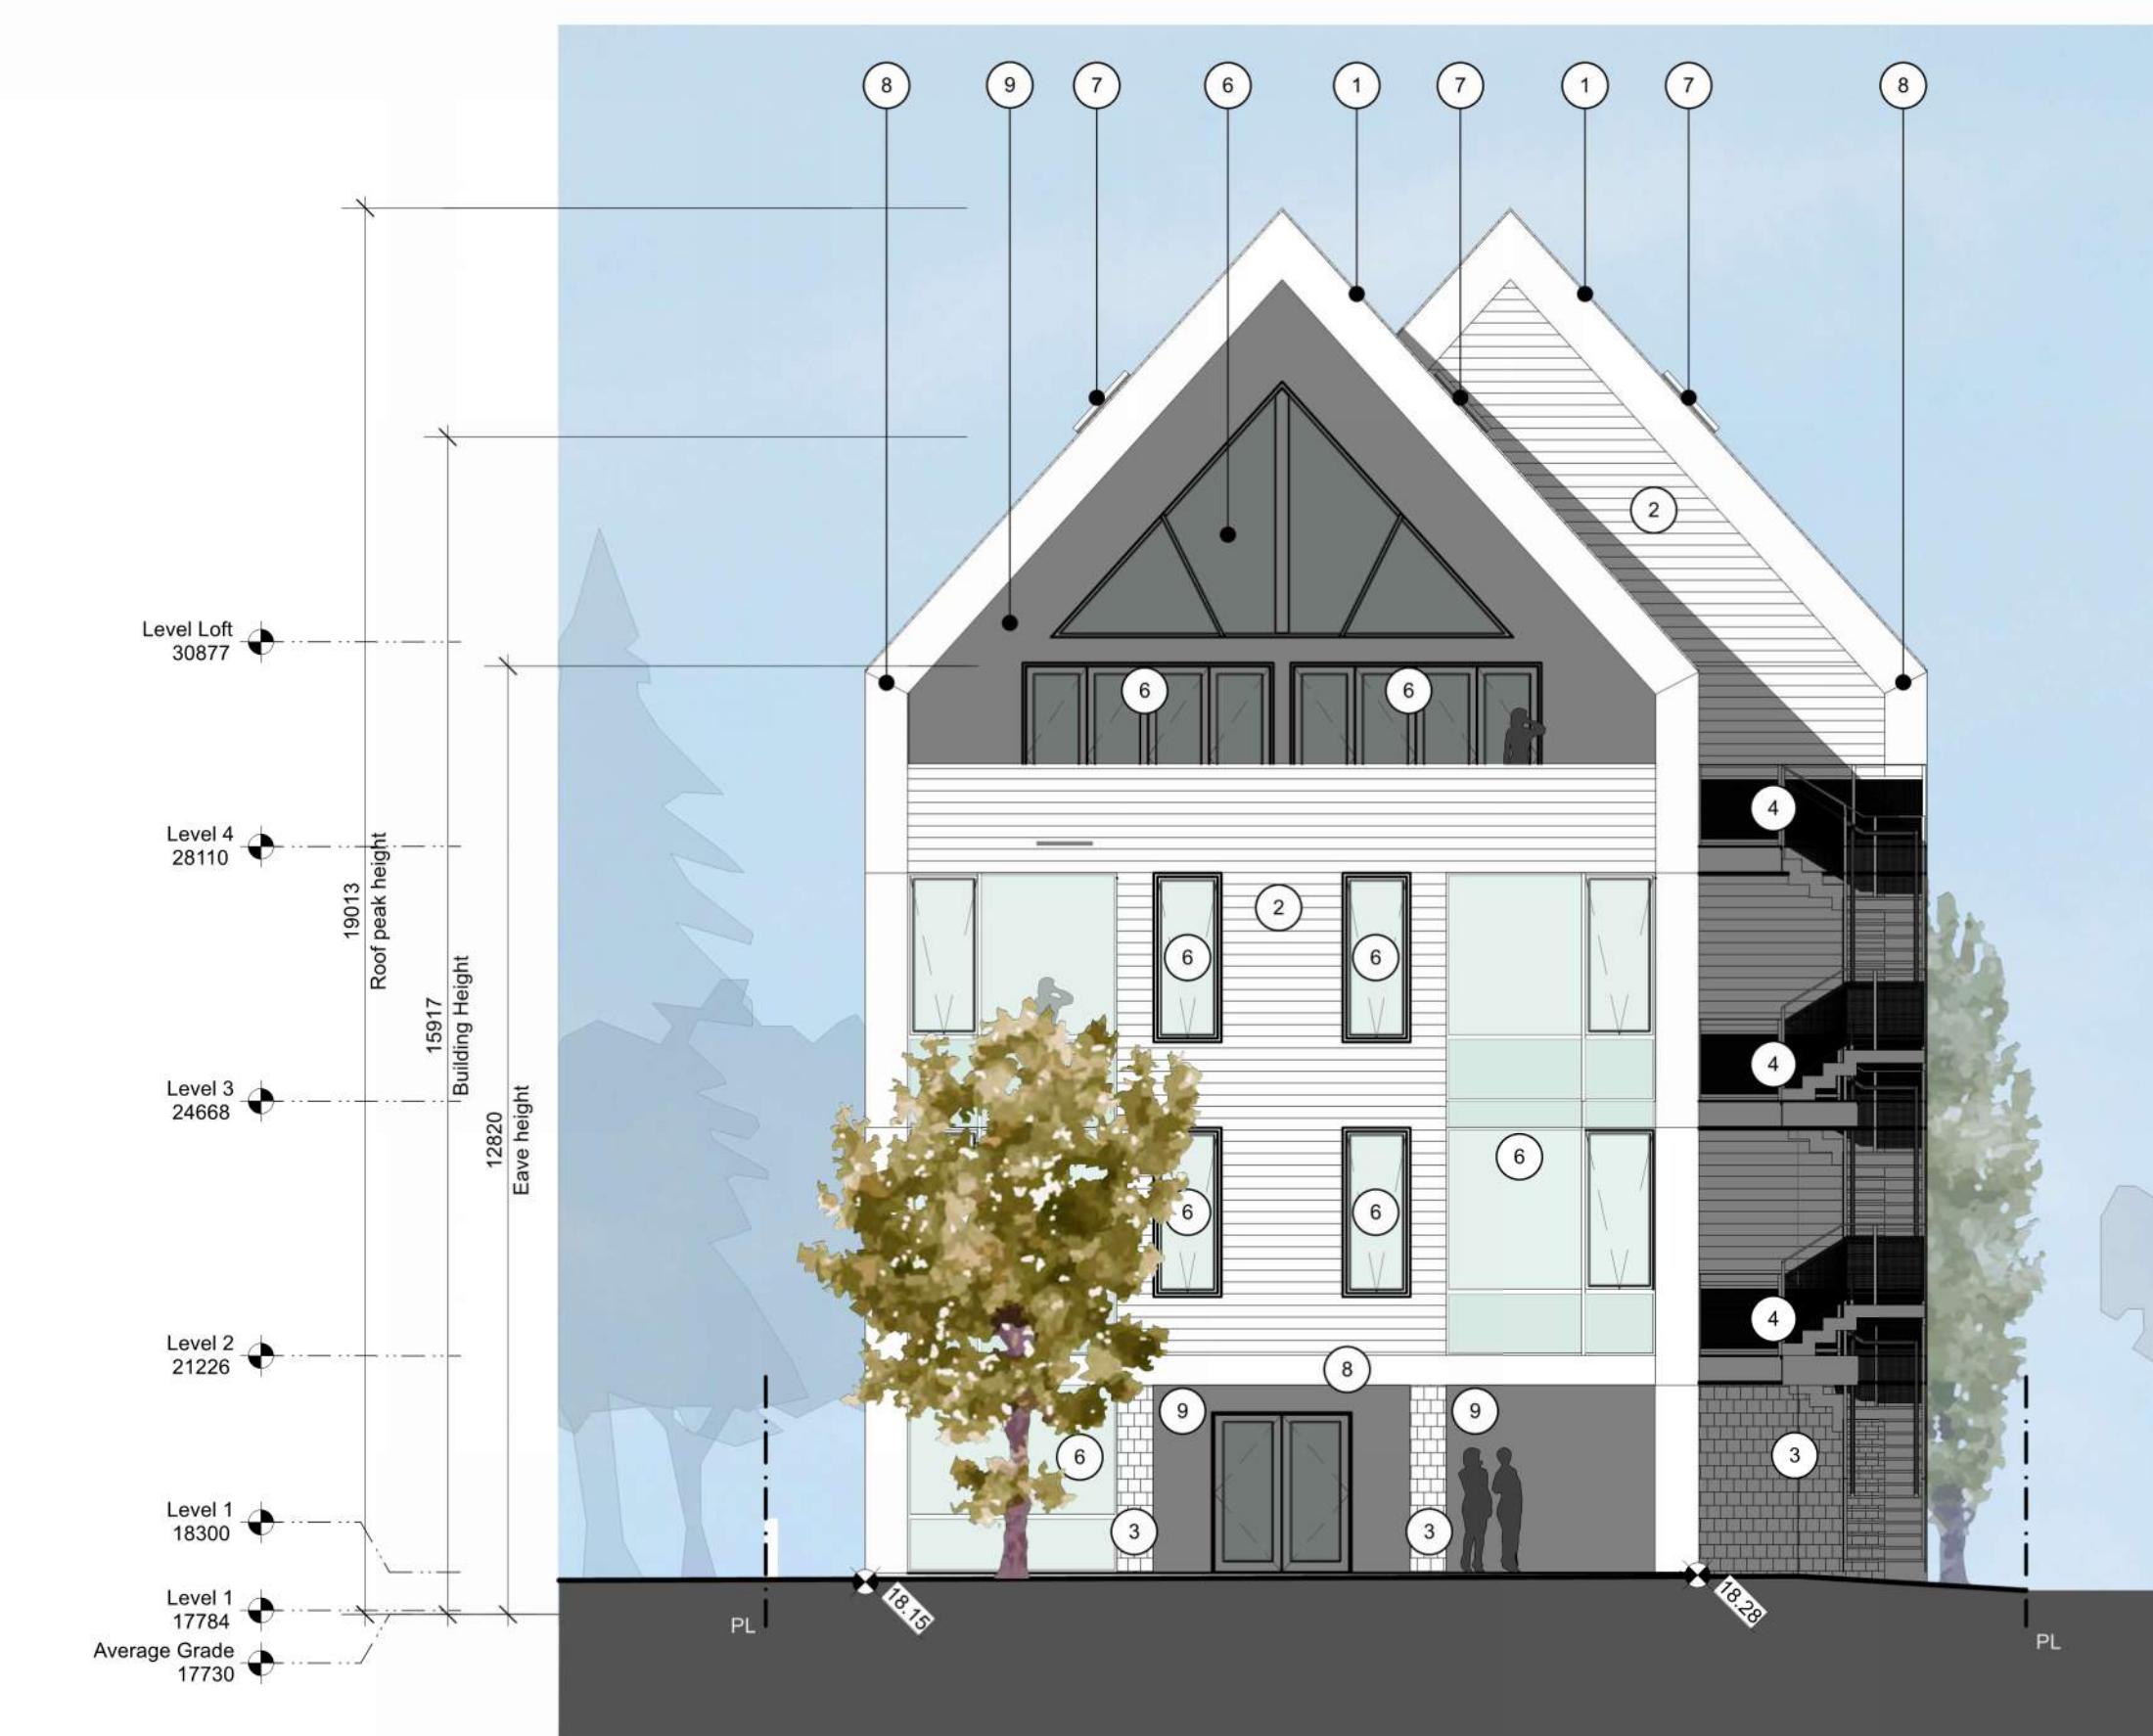

4 Street Front Elevation  
Scale: 1:100

#### FINISH SCHEDULE:

STANDING SEAM METAL ROOF

FIBER CEMENT HORIZONTAL SIDING

FIBER CEMENT SHINGLE WALL CLADDING

METAL GUARDRAIL WITH PERFORATED PANEL




PLANTER BOX WITH TRELLIS

GGLASS WINDOWS AND DOORS

SKYLIGHT

METAL TRIM

HORIZONTAL T&G WOOD SIDING

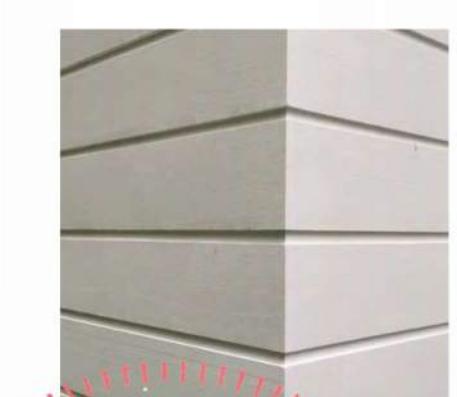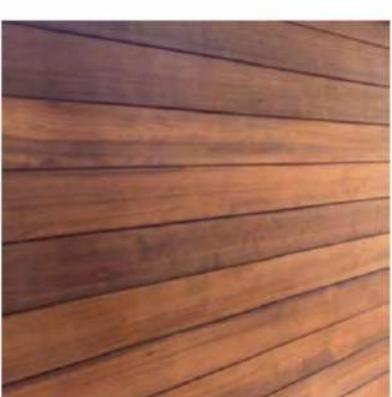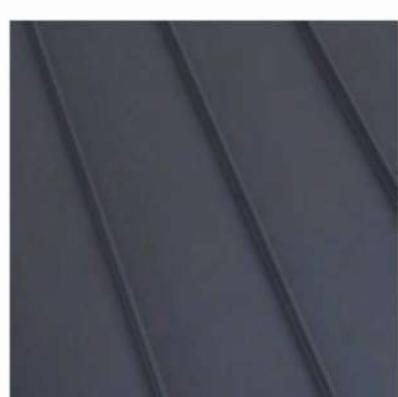

FIBER CEMENT SHINGLE

FIBER CEMENT HORIZONTAL SIDING

HANDRAIL & GUARD WITH PERFORATED METAL PANEL

Oeza Developments



James Bay Development




1 Long Section Facing South  
Scale: 1:100



3 Building Cross Section  
Scale: 1:100



2 Long Section Facing South  
Scale: 1:100

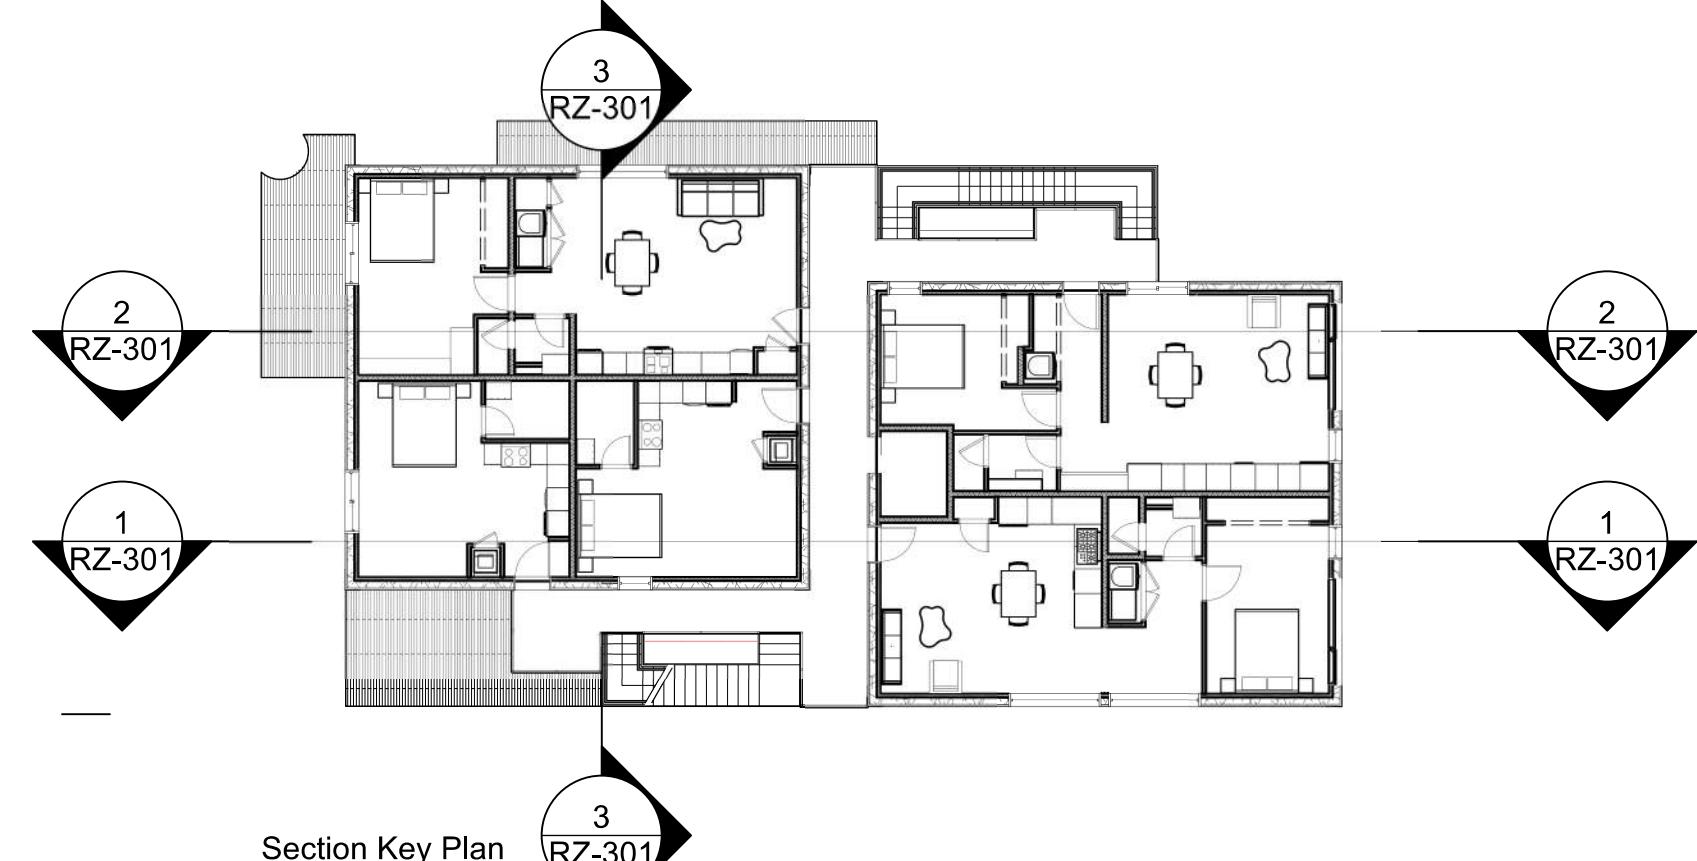

Oeza Developments



James Bay Development

# 50 GOVERNMENT ST

## ISSUED FOR REZONING

**ARCHITECTS:**  
**WAYMARK ARCHITECTURE, INC.**

WILL KING  
will@waymarkarchitecture.com  
778.977.0660

GEORGIA MCRAW  
georgia@waymarkarchitecture.com


**LANDSCAPE ARCHITECT:**  
**G | ALA GAUTHIER + ASSOCIATES LANDSCAPE  
ARCHITECTS INC.**

BRYCE GAUTHIER  
bryce@gauthierla.com  
604.317.9682

JIAHUI HUANG  
jiahui@gauthierla.com  
778.681.8766

**LANDSCAPE DRAWING INDEX PERMIT**

Sheet No.	Sheet Name
L0.0	COVER SHEET
L0.1	OVERALL SITE PLAN
L0.2	TREE MANAGEMENT PLAN
L0.3	PRECEDENT IMAGES
L1.0	LAYOUT + MATERIALS PLAN - LEVEL 1
L1.1	PLANTING PLAN - LEVEL 1
L1.2	GRADING PLAN - LEVEL 1
L1.3	UTILITY PLAN - LEVEL 1
L1.4	STORMWATER MANAGEMENT PLAN - LEVEL 1
L2.0	LAYOUT + MATERIALS PLAN - LEVEL 2
L2.1	PLANTING PLAN - LEVEL 2
L3.0	LAYOUT + MATERIALS PLAN - LEVEL 3
L3.1	PLANTING PLAN - LEVEL 3
L4.0	LAYOUT + MATERIALS PLAN - LEVEL 4
L5.0	PLANT LIST + IMAGES
L6.0	SECTIONS
L6.1	SECTIONS

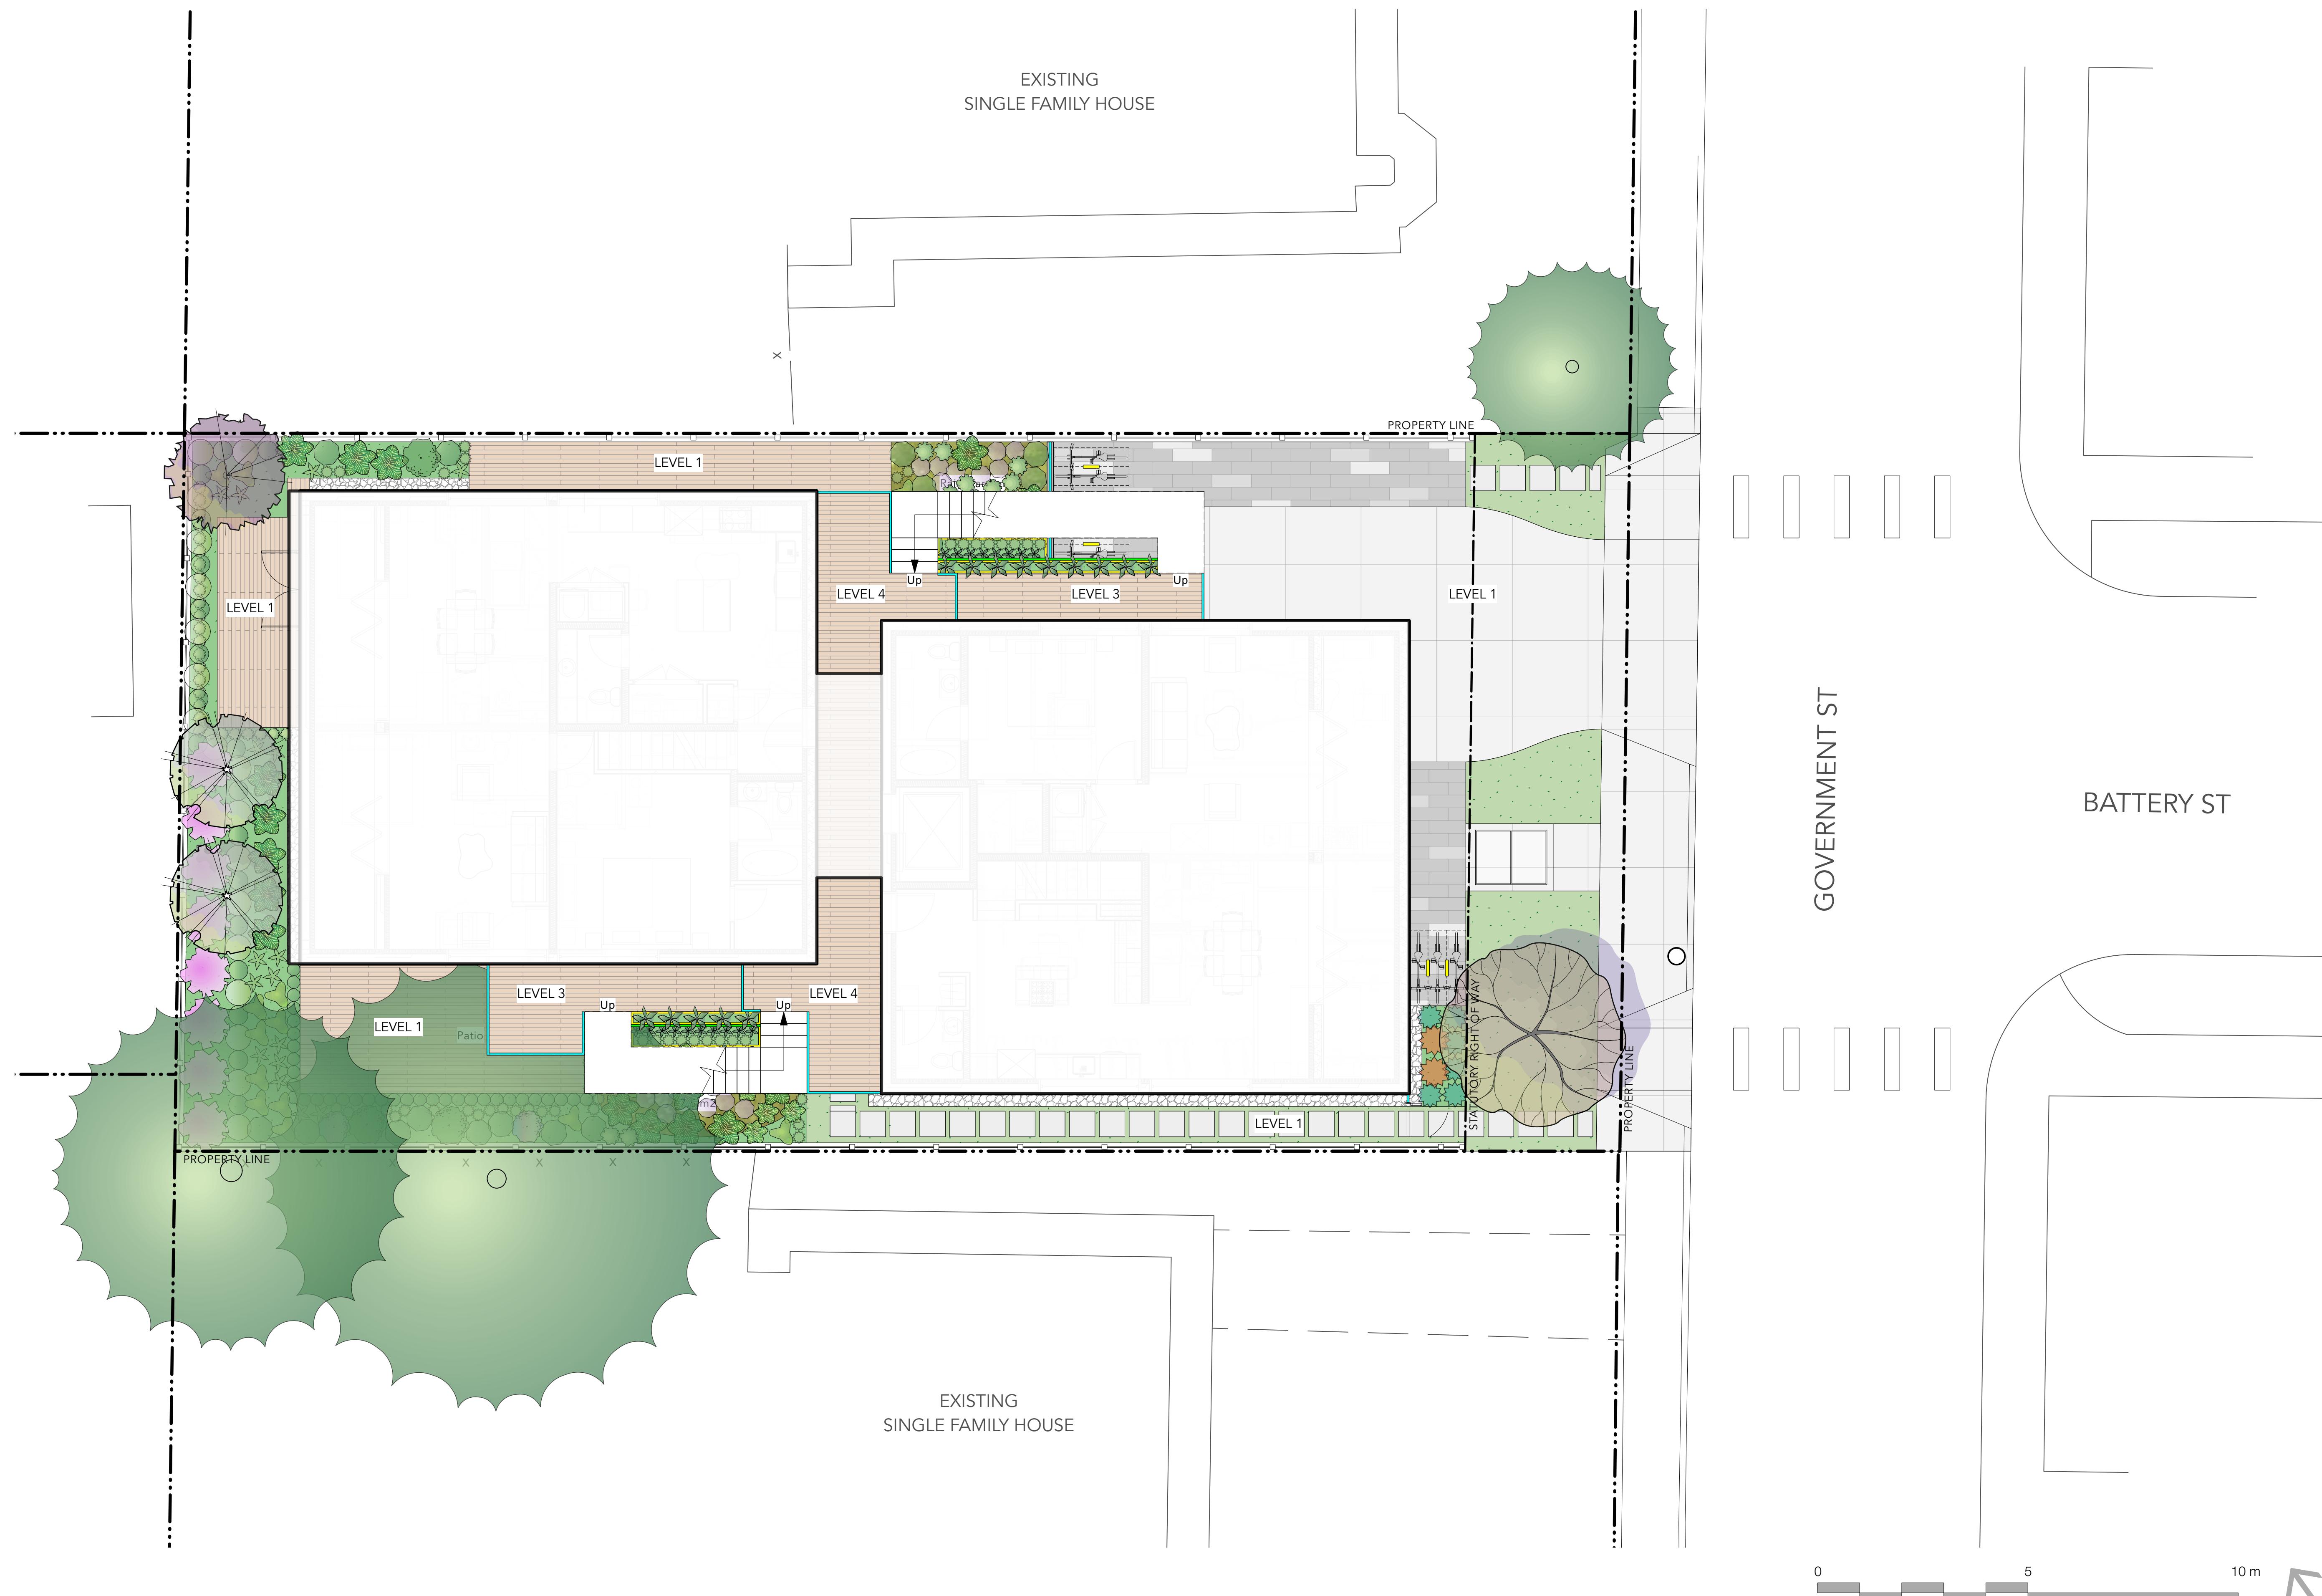


## GENERAL TREE PROTECTION FENCING TYP NOTES:

- ALL COMPONENTS AND WORKMANSHIP TO CONFORM TO BCLNA STANDARDS TYPICAL.
- POSITION TREE STAKES INTO DIRECTION OF PREVAILING WINDS IF MINIMUM UTILITY SETBACKS PERMIT.
- ALL TREE STAKES TO HAVE A MINIMUM 1.0m CLEARANCE FROM ALL U/G POWER, TELEPHONE AND GAS ALIGNMENTS.
- ALL ROOTBALL HOLES TO BE DUG BY HAND WHEN CLOSER TO 1.0M (40") TO U/G POWER, TELEPHONE AND GAS ALIGNMENTS. FOR TREES WITH DRIPINES FROM 3M - 5M (9' - 15') FROM CONSTRUCTION ACTIVITY;
- PLACE STANDARD 'SAFETY ORANGE' SNOWFENCE MIN. OF 4.5M (14'8") FROM TREE TRUNK. EXACT SIZE/SHAPE TO BE DETERMINED ON SITE
- FOR EXCAVATION WITHIN 1-3M (3' - 9') OF ANY TREE'S DRIPLINE, ROOT PRUNING REQUIRED TO A DEPTH OF 500MM (20"). IMMEDIATELY AFTER EXCAVATION, PRUNE ALL EXPOSED ROOTS FLUSH WITH THE EXCAVATION WALL.
- A MAXIMUM OF 25% OF ANY TREE'S ROOTS AT THE DRIPLINE SHOULD BE IMPACTED BY EXCAVATION IF THE TREE IS EXPECTED TO SURVIVE.
- INSTALL AND MAINTAIN HOARDING IN CLEAN AND SAFE CONDITION THROUGHOUT CONSTRUCTION PROCESS.
- HOARDING REQUIREMENTS ARE ON ALL EXISTING TREES THROUGHOUT CONSTRUCTION. ALL EQUIPMENT, SOIL, BUILDING MATERIAL AND OTHER DEBRIS SHALL BE KEPT OUTSIDE THE HOARDING.
- IF HOARDING IS PUNCTURED AND DAMAGE OCCURS TO HOARDED TREE(S), NOTIFY LANDSCAPE ARCHITECT.
- THE BEST METHOD TO AVOID SOIL COMPACTION IS TO KEEP OFF. THIS INCLUDES RESTRICTING ALL TRAFFIC BOTH VEHICULAR AND PEDESTRIAN FROM CROSSING OVER THE ROOT ZONES, AND RESTRICTING EVEN TEMPORARY MATERIAL STORAGE UNDER TREES.
- EXCAVATION AROUND TREES WITHIN DRIP LINE OF TREES ONLY WHERE INDICATED ON PLANS AND AS DIRECTED BY THE CONSULTANT.
- DURING ANY EXCAVATION WITHIN THE DRIP LINE OF A TREE THE CONTRACTOR SHALL EXCAVATE AROUND TREE ROOTS AS DIRECTED BY THE CONSULTANT. DO NOT CUT TREE ROOTS UNLESS DIRECTED BY THE CONSULTANT.
- TREES AND OTHER DESIRABLE VEGETATION TO BE TOTALLY FENCED. FENCING TO BE MAINTAINED FOR THE DURATION OF THE PROJECT.
- EXCAVATION FOR NEW CONSTRUCTION WITHIN THE DRIP LINES OF TREES: HAND EXCAVATE TO MINIMIZE DAMAGE TO ROOT SYSTEMS
- USE NARROW TINE SPADING FORKS TO PROBE AND COMB SOIL TO EXPOSE ROOTS;
- RELOCATE ROOTS INTO BACKFILL AREAS WHENEVER POSSIBLE. IF LARGE MAIN LATERAL ROOTS ARE ENCOUNTERED, EXPOSE BEYOND EXCAVATION LIMITS AS REQUIRED TO BEND AND RELOCATE WITHOUT BREAKING.
- UTILITY TRENCHING WITHIN THE DRIP LINES OF TREES: TUNNEL UNDER AND AROUND ROOTS BY HAND DIGGING;
- DO NOT CUT MAIN LATERAL ROOTS;
- CUTTING OF SMALLER ROOTS THAT INTERFERE WITH INSTALLATION OF NEW WORK SHALL BE DONE WITH CLEAN SHARP TREE PRUNING TOOLS;
- ROOTS THAT ARE ENCOUNTERED IMMEDIATELY ADJACENT TO THE LOCATION OF NEW CONSTRUCTION AND ARE TOO DIFFICULT TO RELOCATE SHALL BE CUT 150MM (6") BACK FROM NEW CONSTRUCTION. USE CLEAN SHARP TREE PRUNING TOOLS;
- PROTECTION OF EXPOSED ROOTS: DO NOT ALLOW EXPOSED ROOTS TO DRY OUT PRIOR TO PLACEMENT OF PERMANENT COVER.
- PROVIDE ONE OF THE FOLLOWING TEMPORARY REMEDIAL MEASURES:
- A. PROVIDE TEMPORARY EARTH COVER. MAINTAIN MOISTURE.
- B. PACK WITH WET PEAT MOSS. MAINTAIN MOISTURE.
- C. PACK WITH FOUR LAYERS OF WET UNTREATED BURLAP. MAINTAIN MOISTURE.
- TEMPORARILY SUPPORT AND PROTECT EXPOSED ROOTS FROM DAMAGE UNTIL PERMANENTLY RELOCATED AND COVERED WITH BACKFILL.
- WATER PUDDLE BACKFILL AROUND ROOTS TO ELIMINATE Voids AND AIR POCKETS
- REMOVAL OF STREET TREES TO THE SATISFACTION OF THE GENERAL MANAGER OF ENGINEERING SERVICES.

## TREE MANAGEMENT PLAN

SYMBOL	DESCRIPTION
	TREE PROTECTION BARRIER FENCE Refer to Tree Protection Notes for Requirements
	EXISTING TREE TO BE RETAINED Refer to Arborist Report

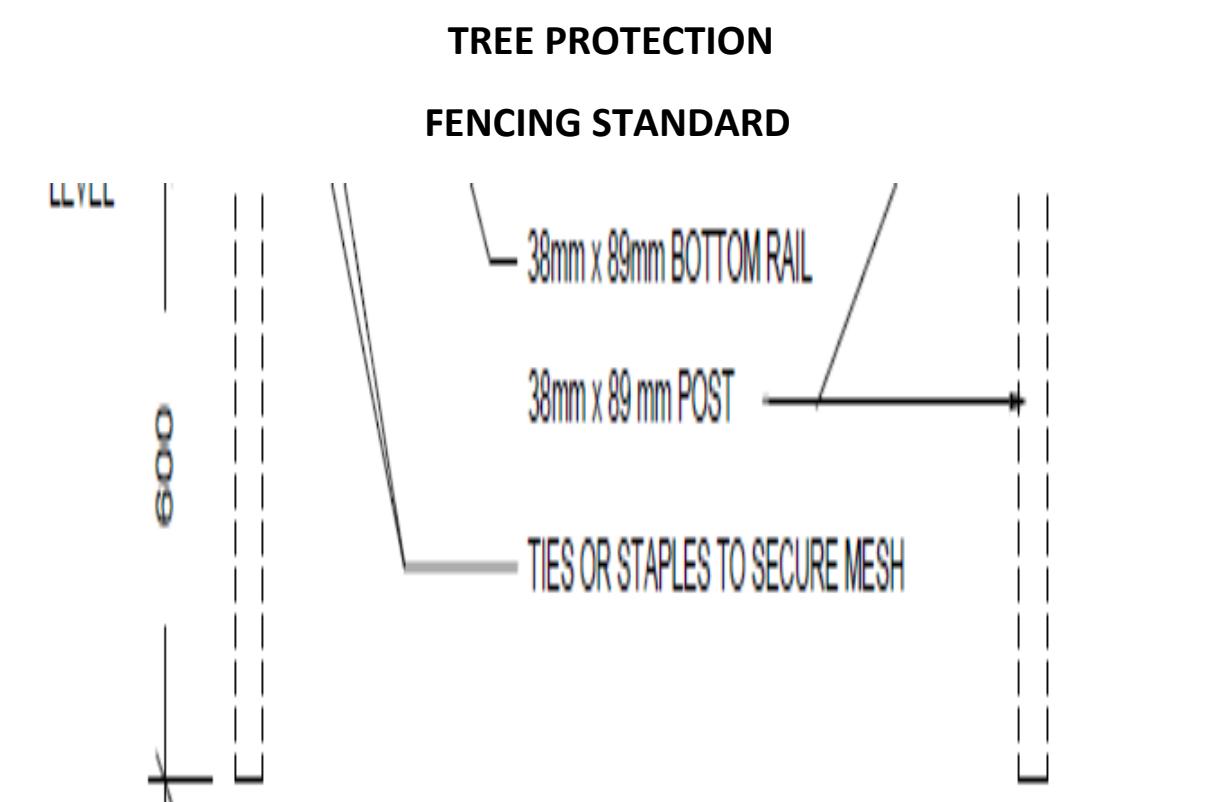

### TREE PROTECTION


#### FENCING STANDARD


**Tree Protection Fencing Specifications:**

- The fence will be constructed using 38 x 89 mm (2" x 4") wood frame:
  - Top, Bottom and Posts.\*
  - Use orange snow fencing mesh and secure to the wood frame with "zip" ties or galvanized staples.
- Attach a sign with minimum size of 407 mm x 610 mm (16" X 24") with the following wording:
  - DO NOT ENTER**- Tree Protection Zone (For retained trees) or;
  - DO NOT ENTER**- Future Tree Planting Zone (For tree planting sites)


This sign must be affixed on every fence face or at least every 10 linear metres.

\*In rocky areas, metal posts (t-bar or rebar) drilled into rock will be accepted.

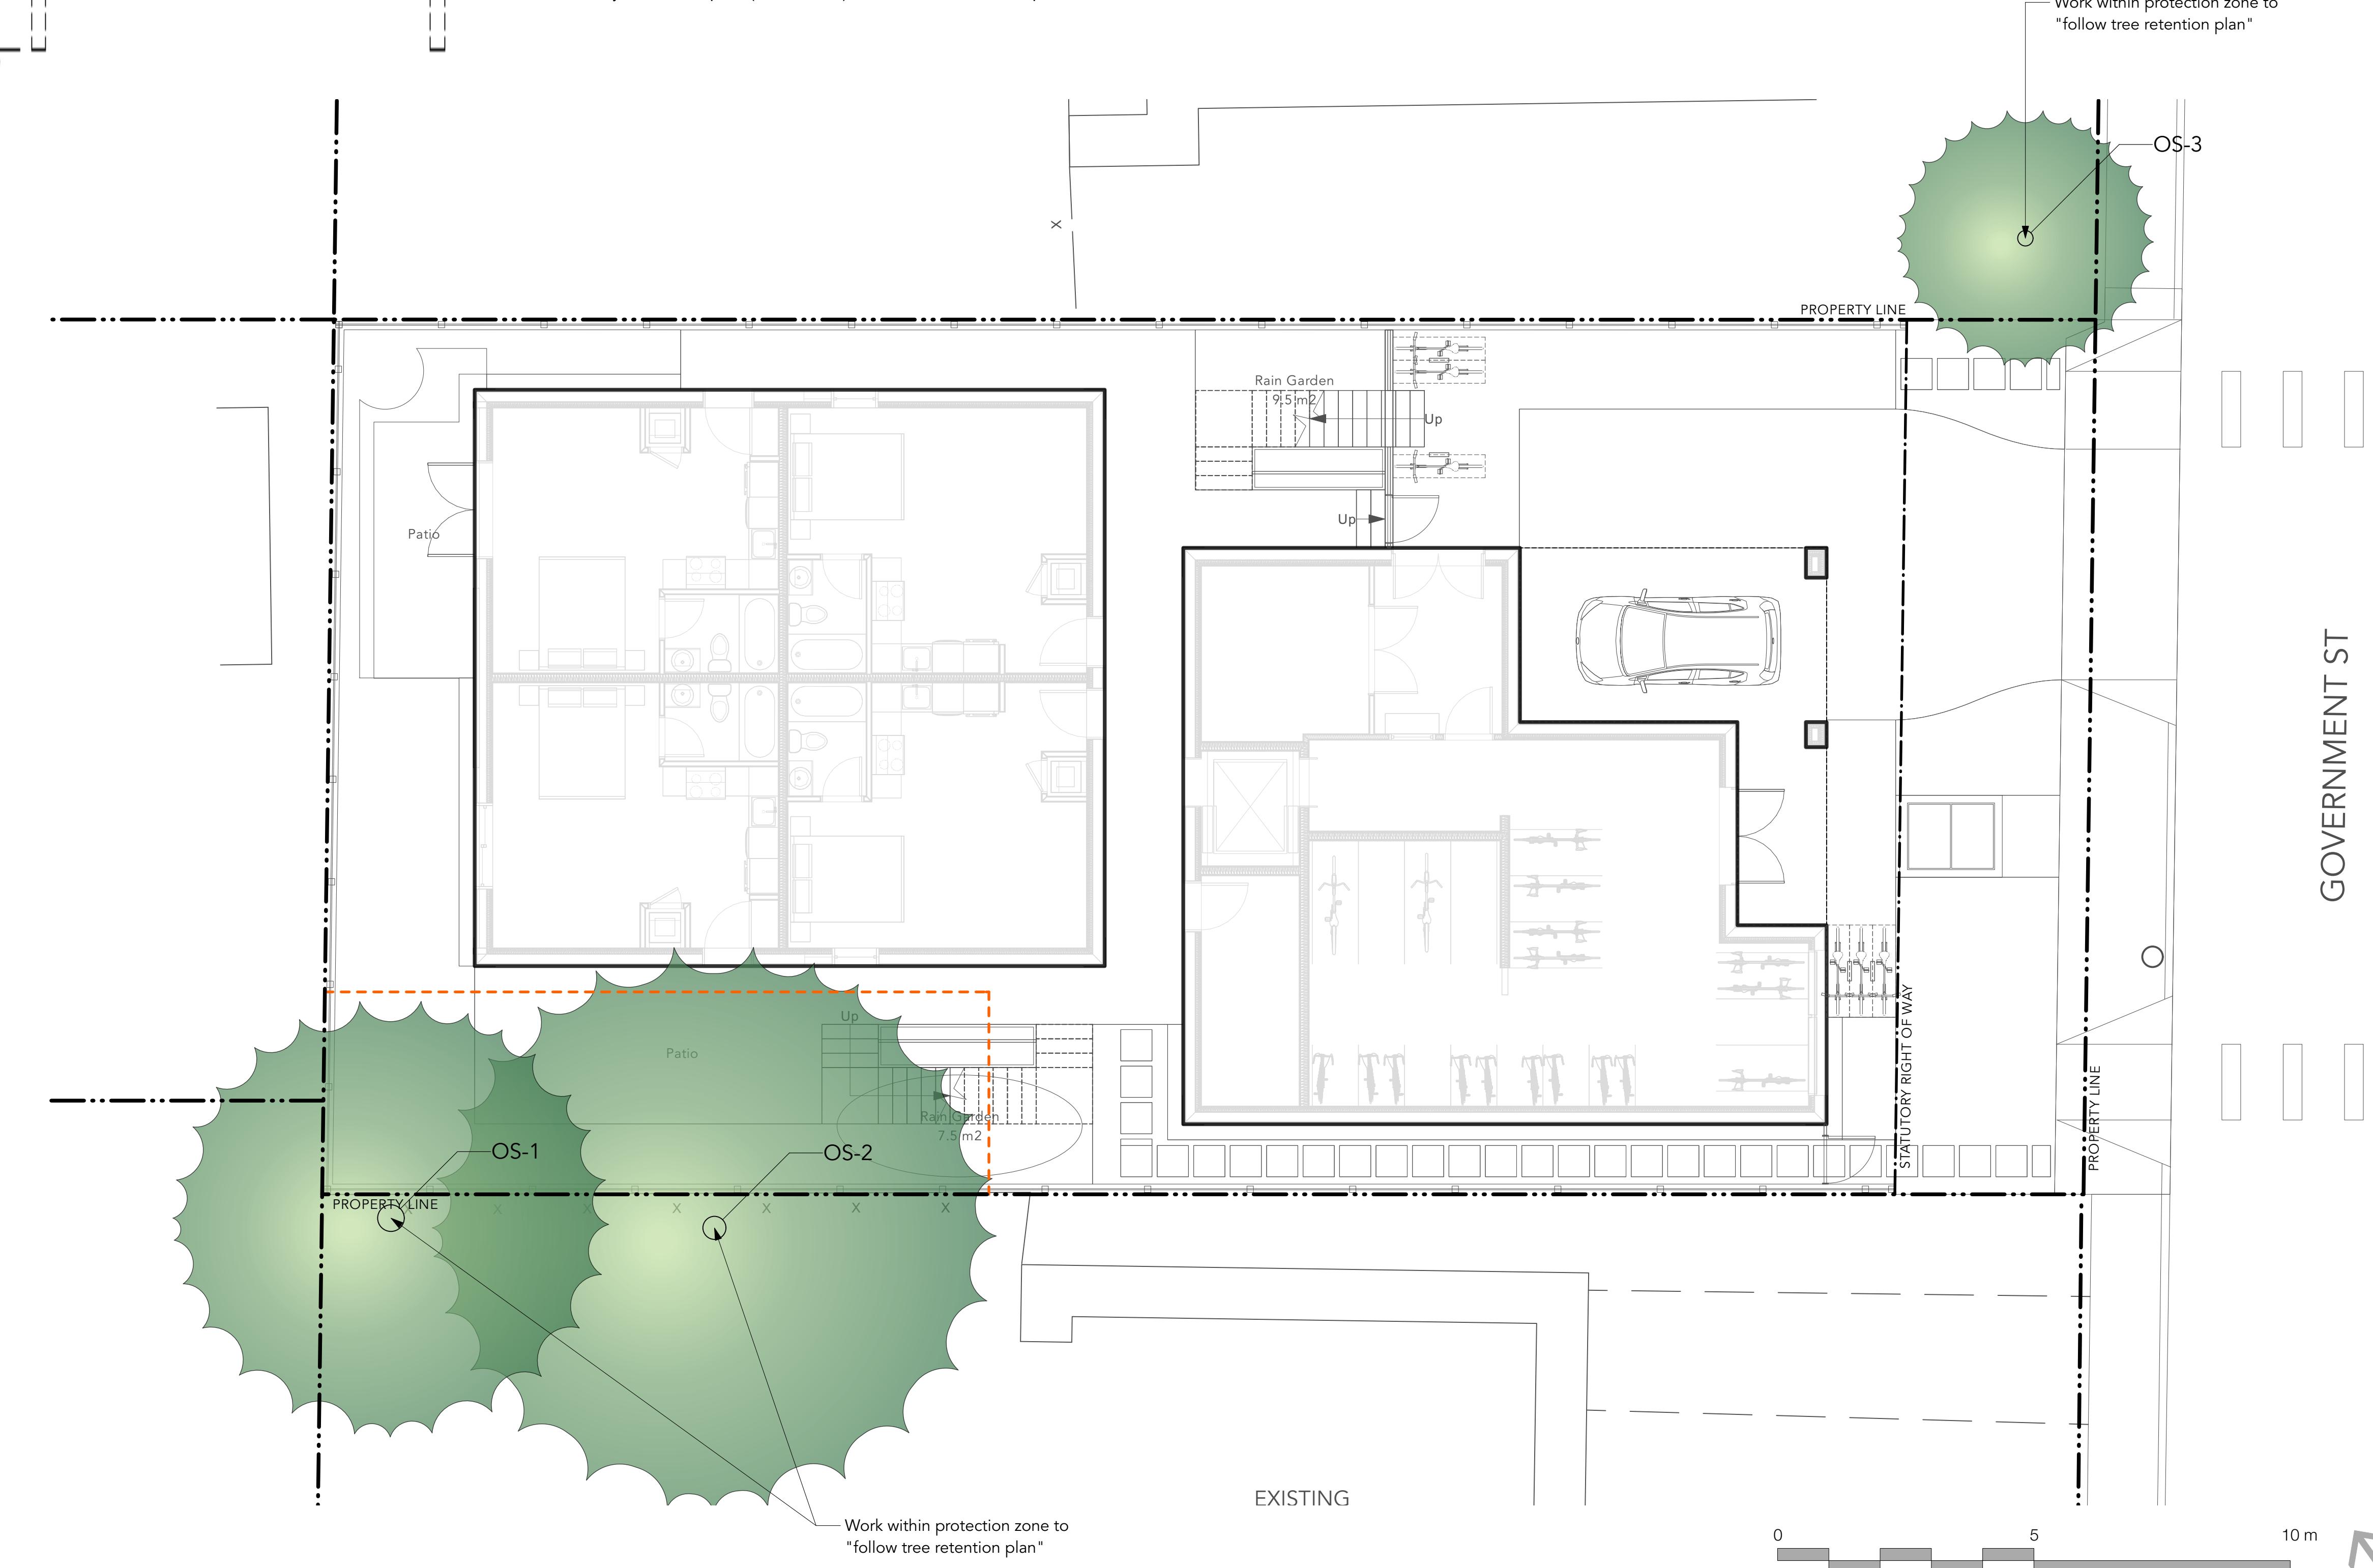

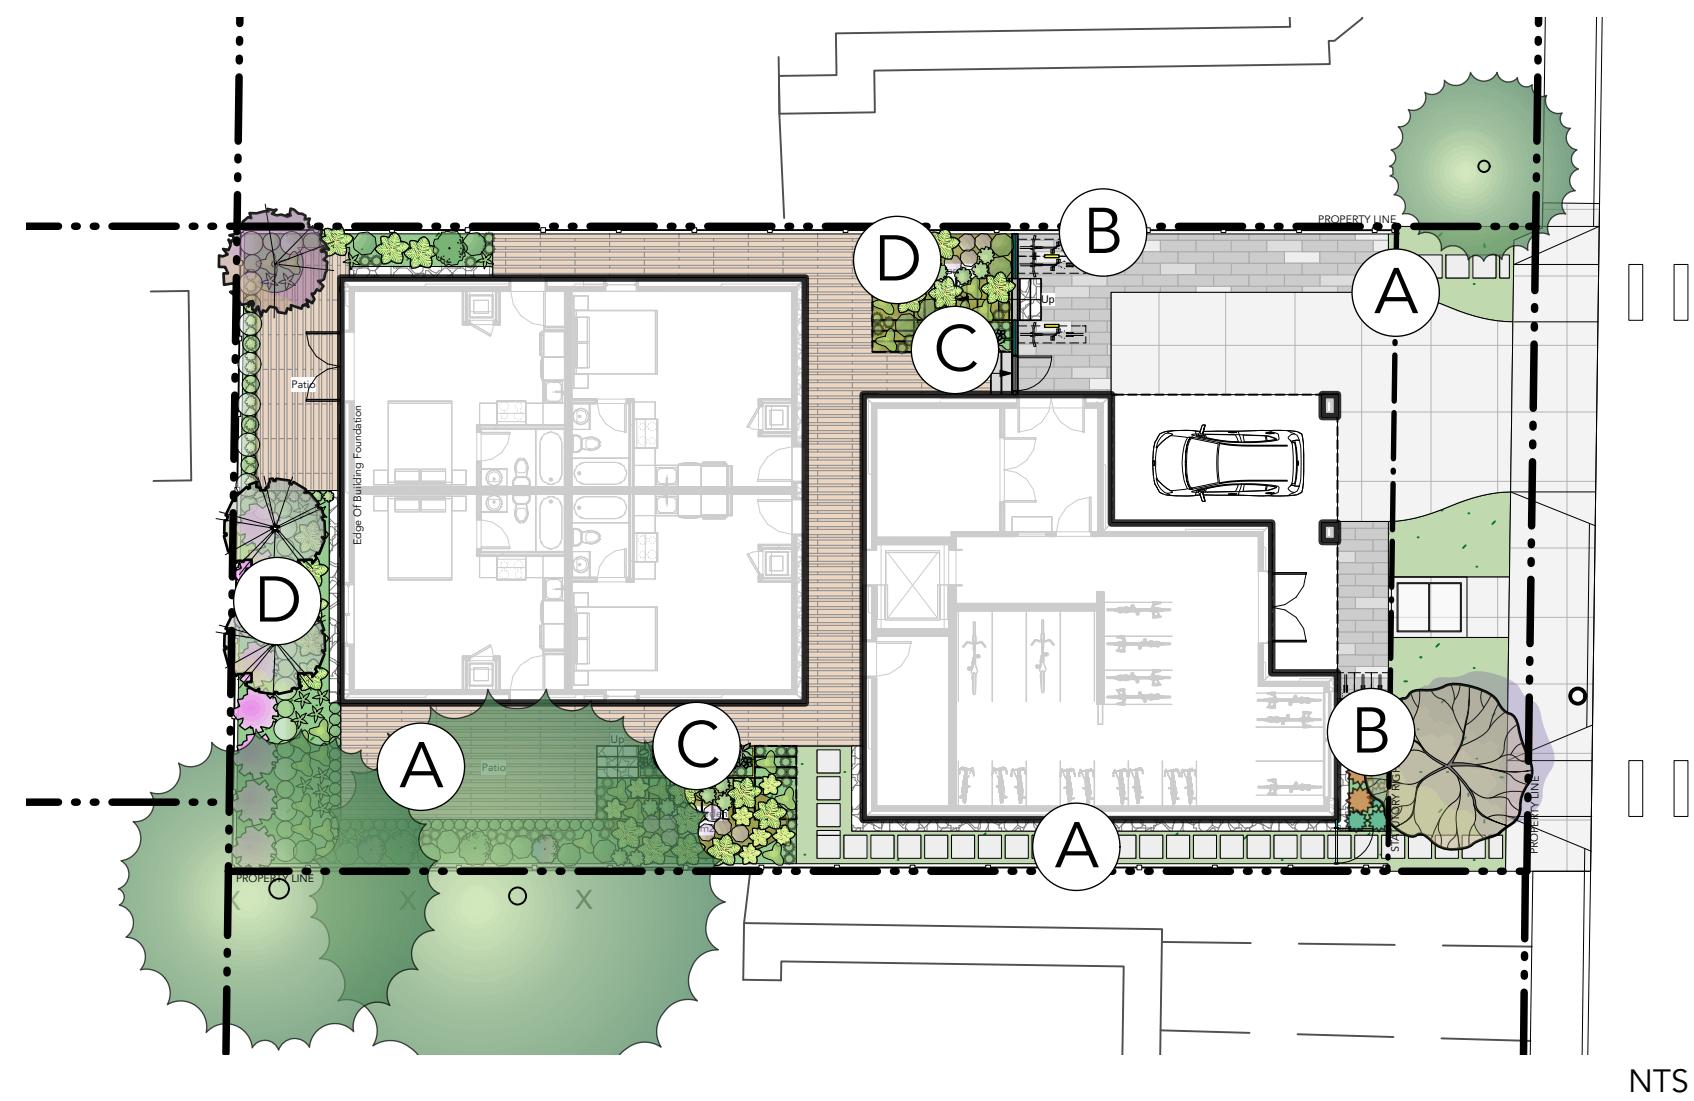

### A PAVING

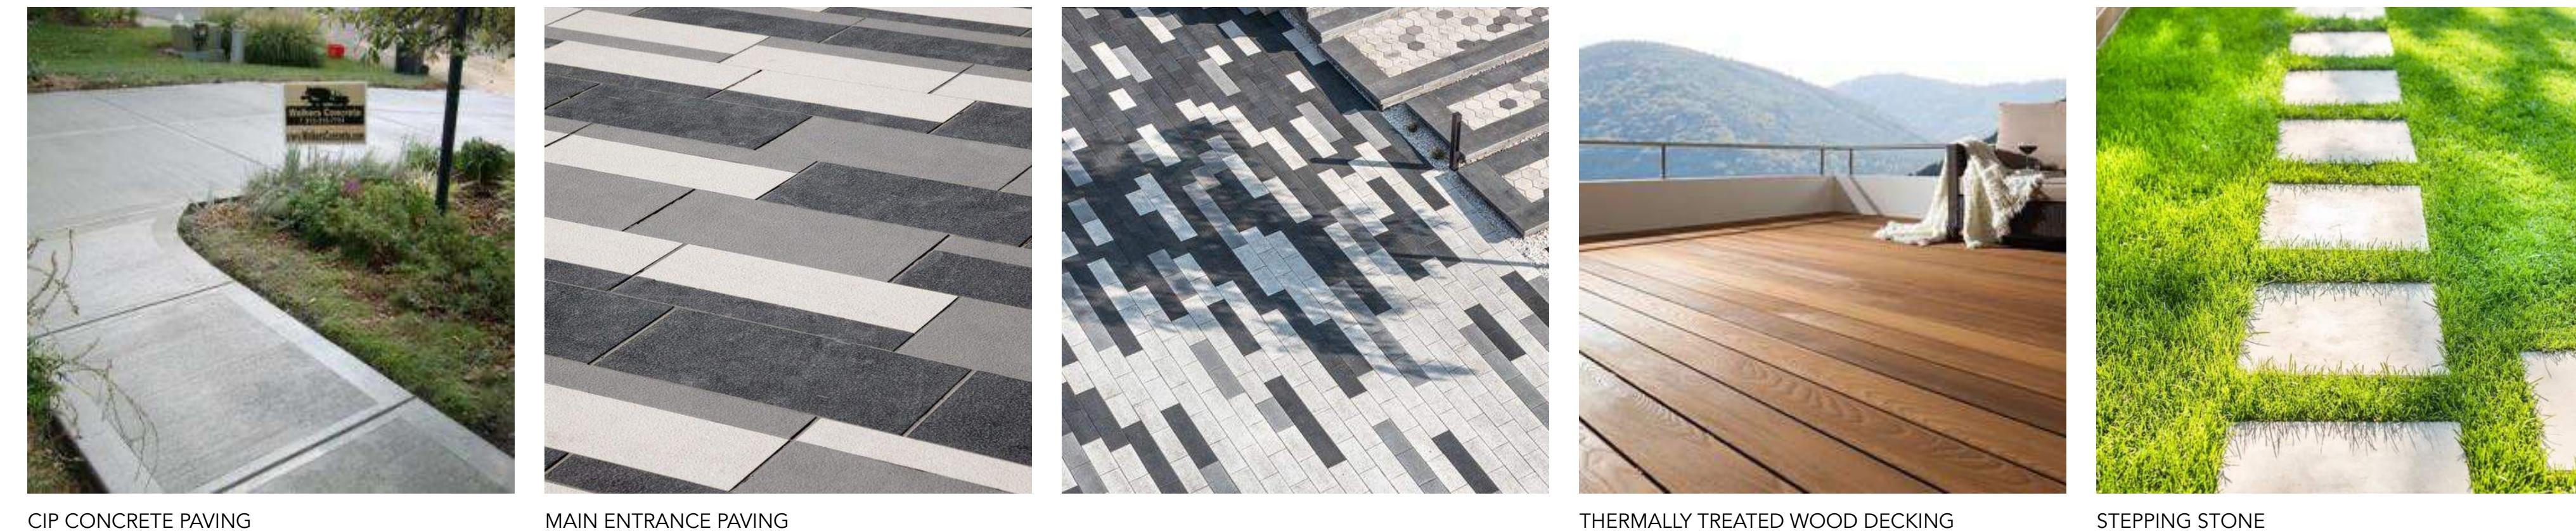


### B BIKE RACK



Metal Bike Rack

### C PLANTING BESIDE STAIRS

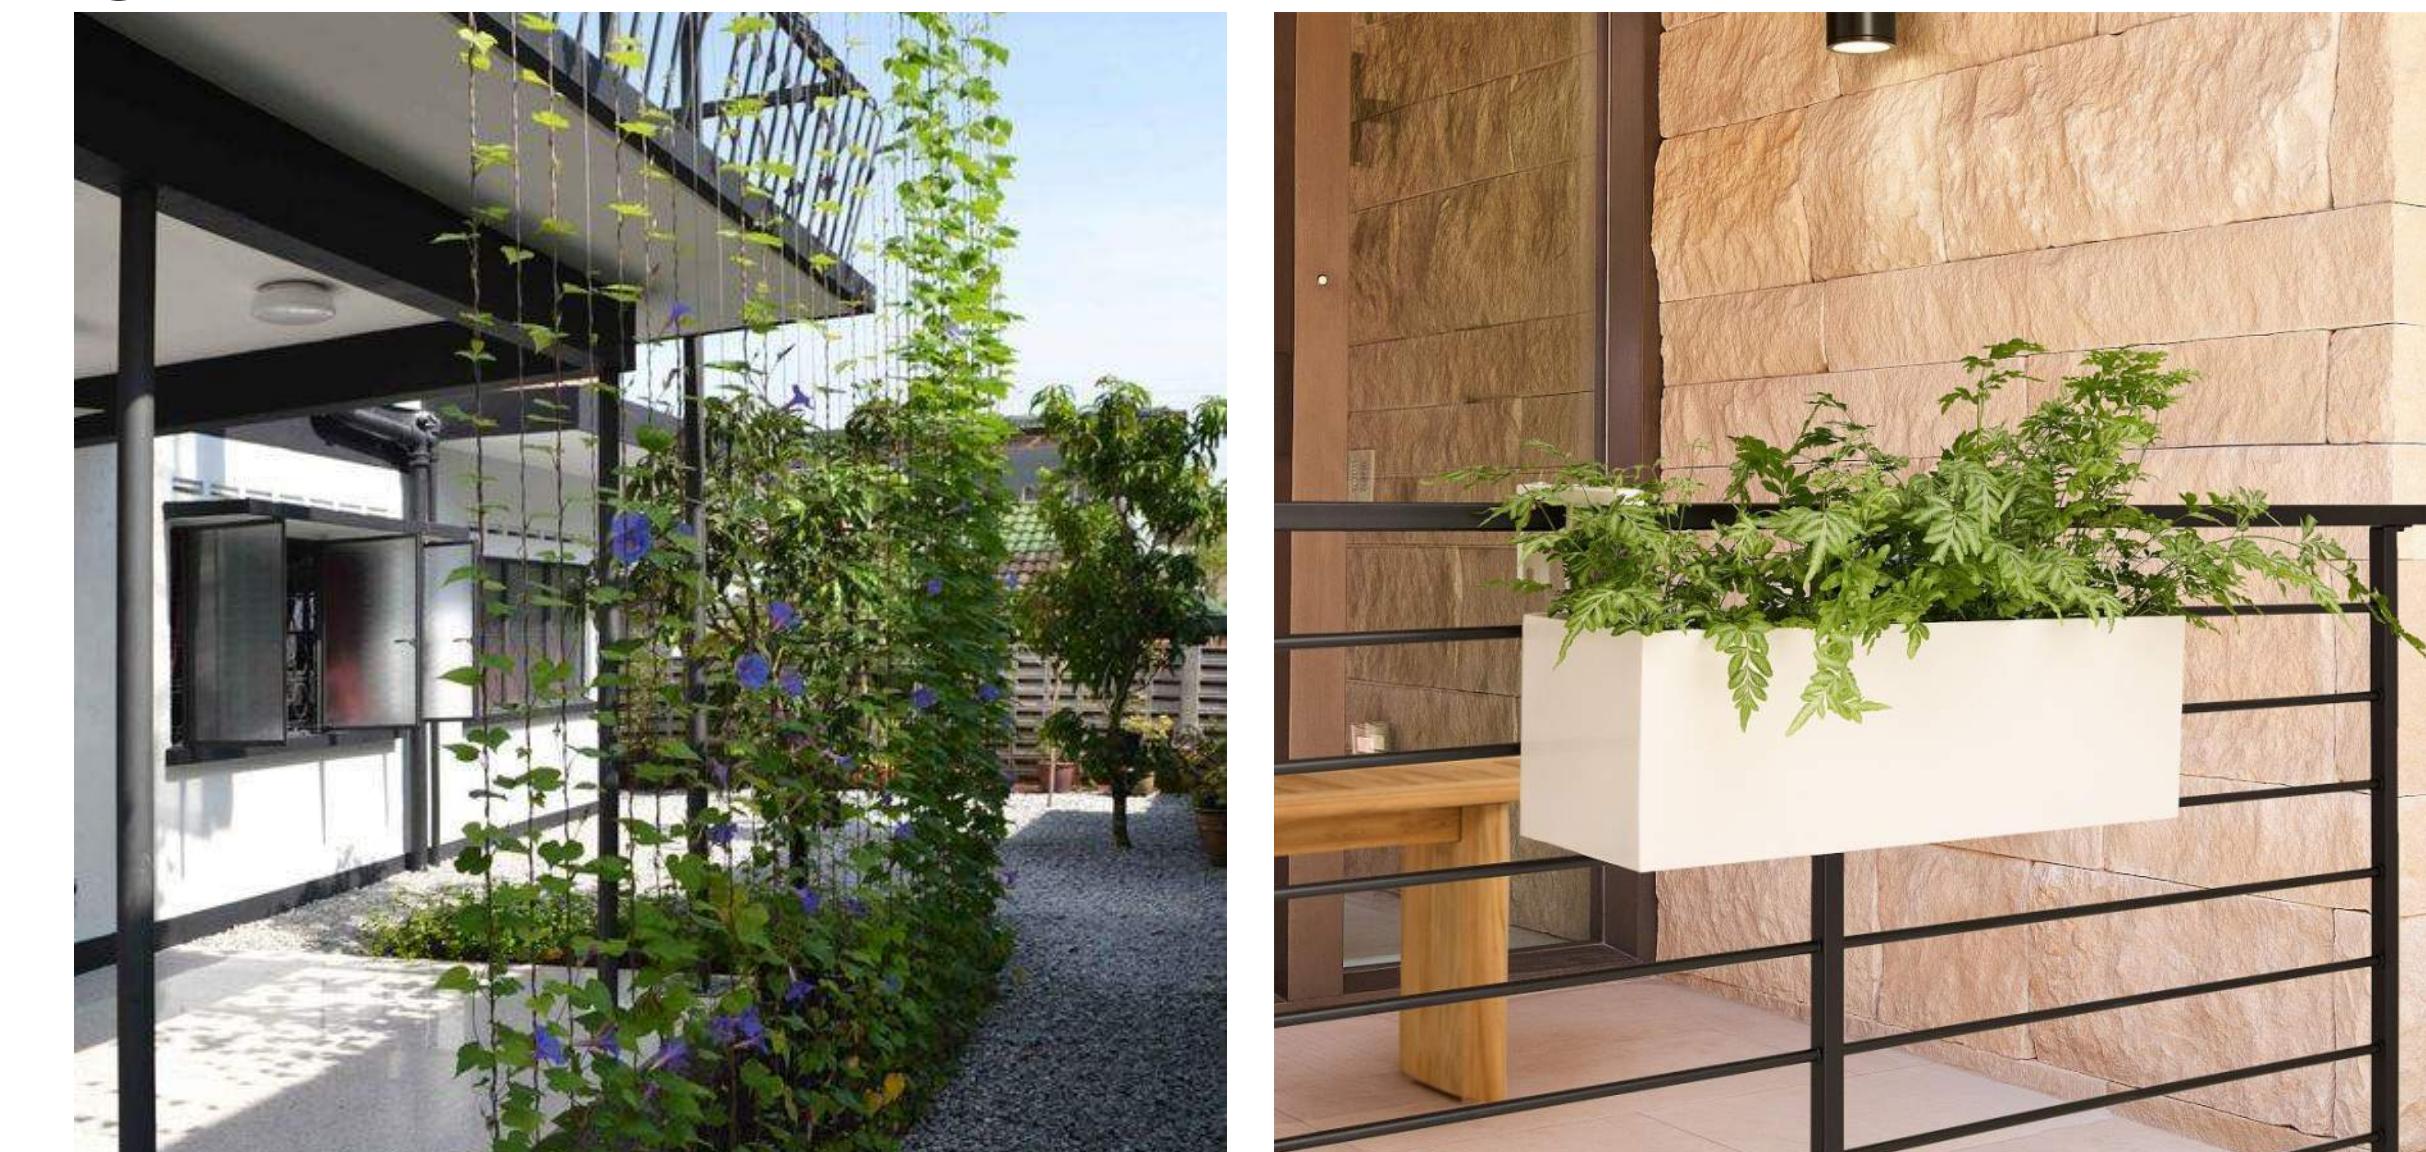

Cable For Vine Climbing

Rail Planter

### D PLANTING




## GENERAL LAYOUT + MATERIALS NOTES:

1. ALL DIMENSIONS ARE METRIC UNLESS OTHERWISE NOTED. VERIFY ALL DIMENSIONS WITH FIELD CONDITIONS. REPORT ANY DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW AND RESPONSE.
2. ALL UTILITIES TO BE STAKED OUT BY CONTRACTOR AND PROTECTED FOR DURATION OF CONSTRUCTION PERIOD.
3. UNLESS OTHERWISE NOTED, PROVIDE A MINIMUM 2% SLOPE ON ALL HARD AND SOFT LANDSCAPE AREAS TO ENSURE POSITIVE DRAINAGE AWAY FROM BUILDINGS OR TO DRAINAGE STRUCTURES. MAXIMUM 3:1 SLOPE IN SOFT LANDSCAPE AREAS.
4. THE LAYOUT OF ALL HARDSCAPE ITEMS, SITE FURNISHINGS, BOULDERS, LANDSCAPE LIGHTING, PLANTING BEDS AND OTHER MATERIALS IS TO BE STAKED OUT BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
5. ALL SUBSTITUTIONS OF SPECIFIED MATERIALS TO BE APPROVED BY LANDSCAPE ARCHITECT.
6. THIS PLAN IS "NOT FOR CONSTRUCTION" AND IS TO BE SUBMITTED FOR REVIEW TO ENGINEERING SERVICES A MINIMUM OF 8 WEEKS PRIOR TO THE START OF ANY CONSTRUCTION PROPOSED FOR PUBLIC PROPERTY. NO WORK ON PUBLIC PROPERTY MAY BEGIN UNTIL SUCH PLANS RECEIVE "FOR CONSTRUCTION" APPROVAL AND RELATED PERMITS ARE ISSUED. PLEASE CONTACT ENGINEERING, DEVELOPMENT SERVICES AND/OR YOUR ENGINEERING, BUILDING SITE INSPECTOR FOR DETAILS.
7. MAINTENANCE AND IRRIGATION WILL BE PROVIDED TO ALL AREAS.

## MATERIALS LEGEND

SYMBOL	DESCRIPTION
	PAVING TYPE 1 CIP Concrete Paving To City Standards
	PAVING TYPE 2 Wood Deck
	PAVING TYPE 3 Permeable Pavers
	PAVING TYPE 4 River Rock Strip
	PAVING TYPE 5 Stepping Stone
	PLANTING TYPE 1 Lawn Area
	PLANTING TYPE 2 Shrub Area
	PLANTING TYPE 3 Metal Planter 2' High
	PLANTING TYPE 4 Rain Garden
	CIP CONCRETE STAIRS
	METAL STAIRS See Arch for Details
	CONCRETE RETAINING WALL 6' Wide
	FENCE WITH POST FOUNDATIONS 6' High
	GUARDRAIL WITH GATE 3.5' High
	BIKE RACK
	METAL TRELLIS FOR VINE CLIMBING
	FLOOR ABOVE
	WATER VAULT COVER
	EXISTING UTILITY POLE

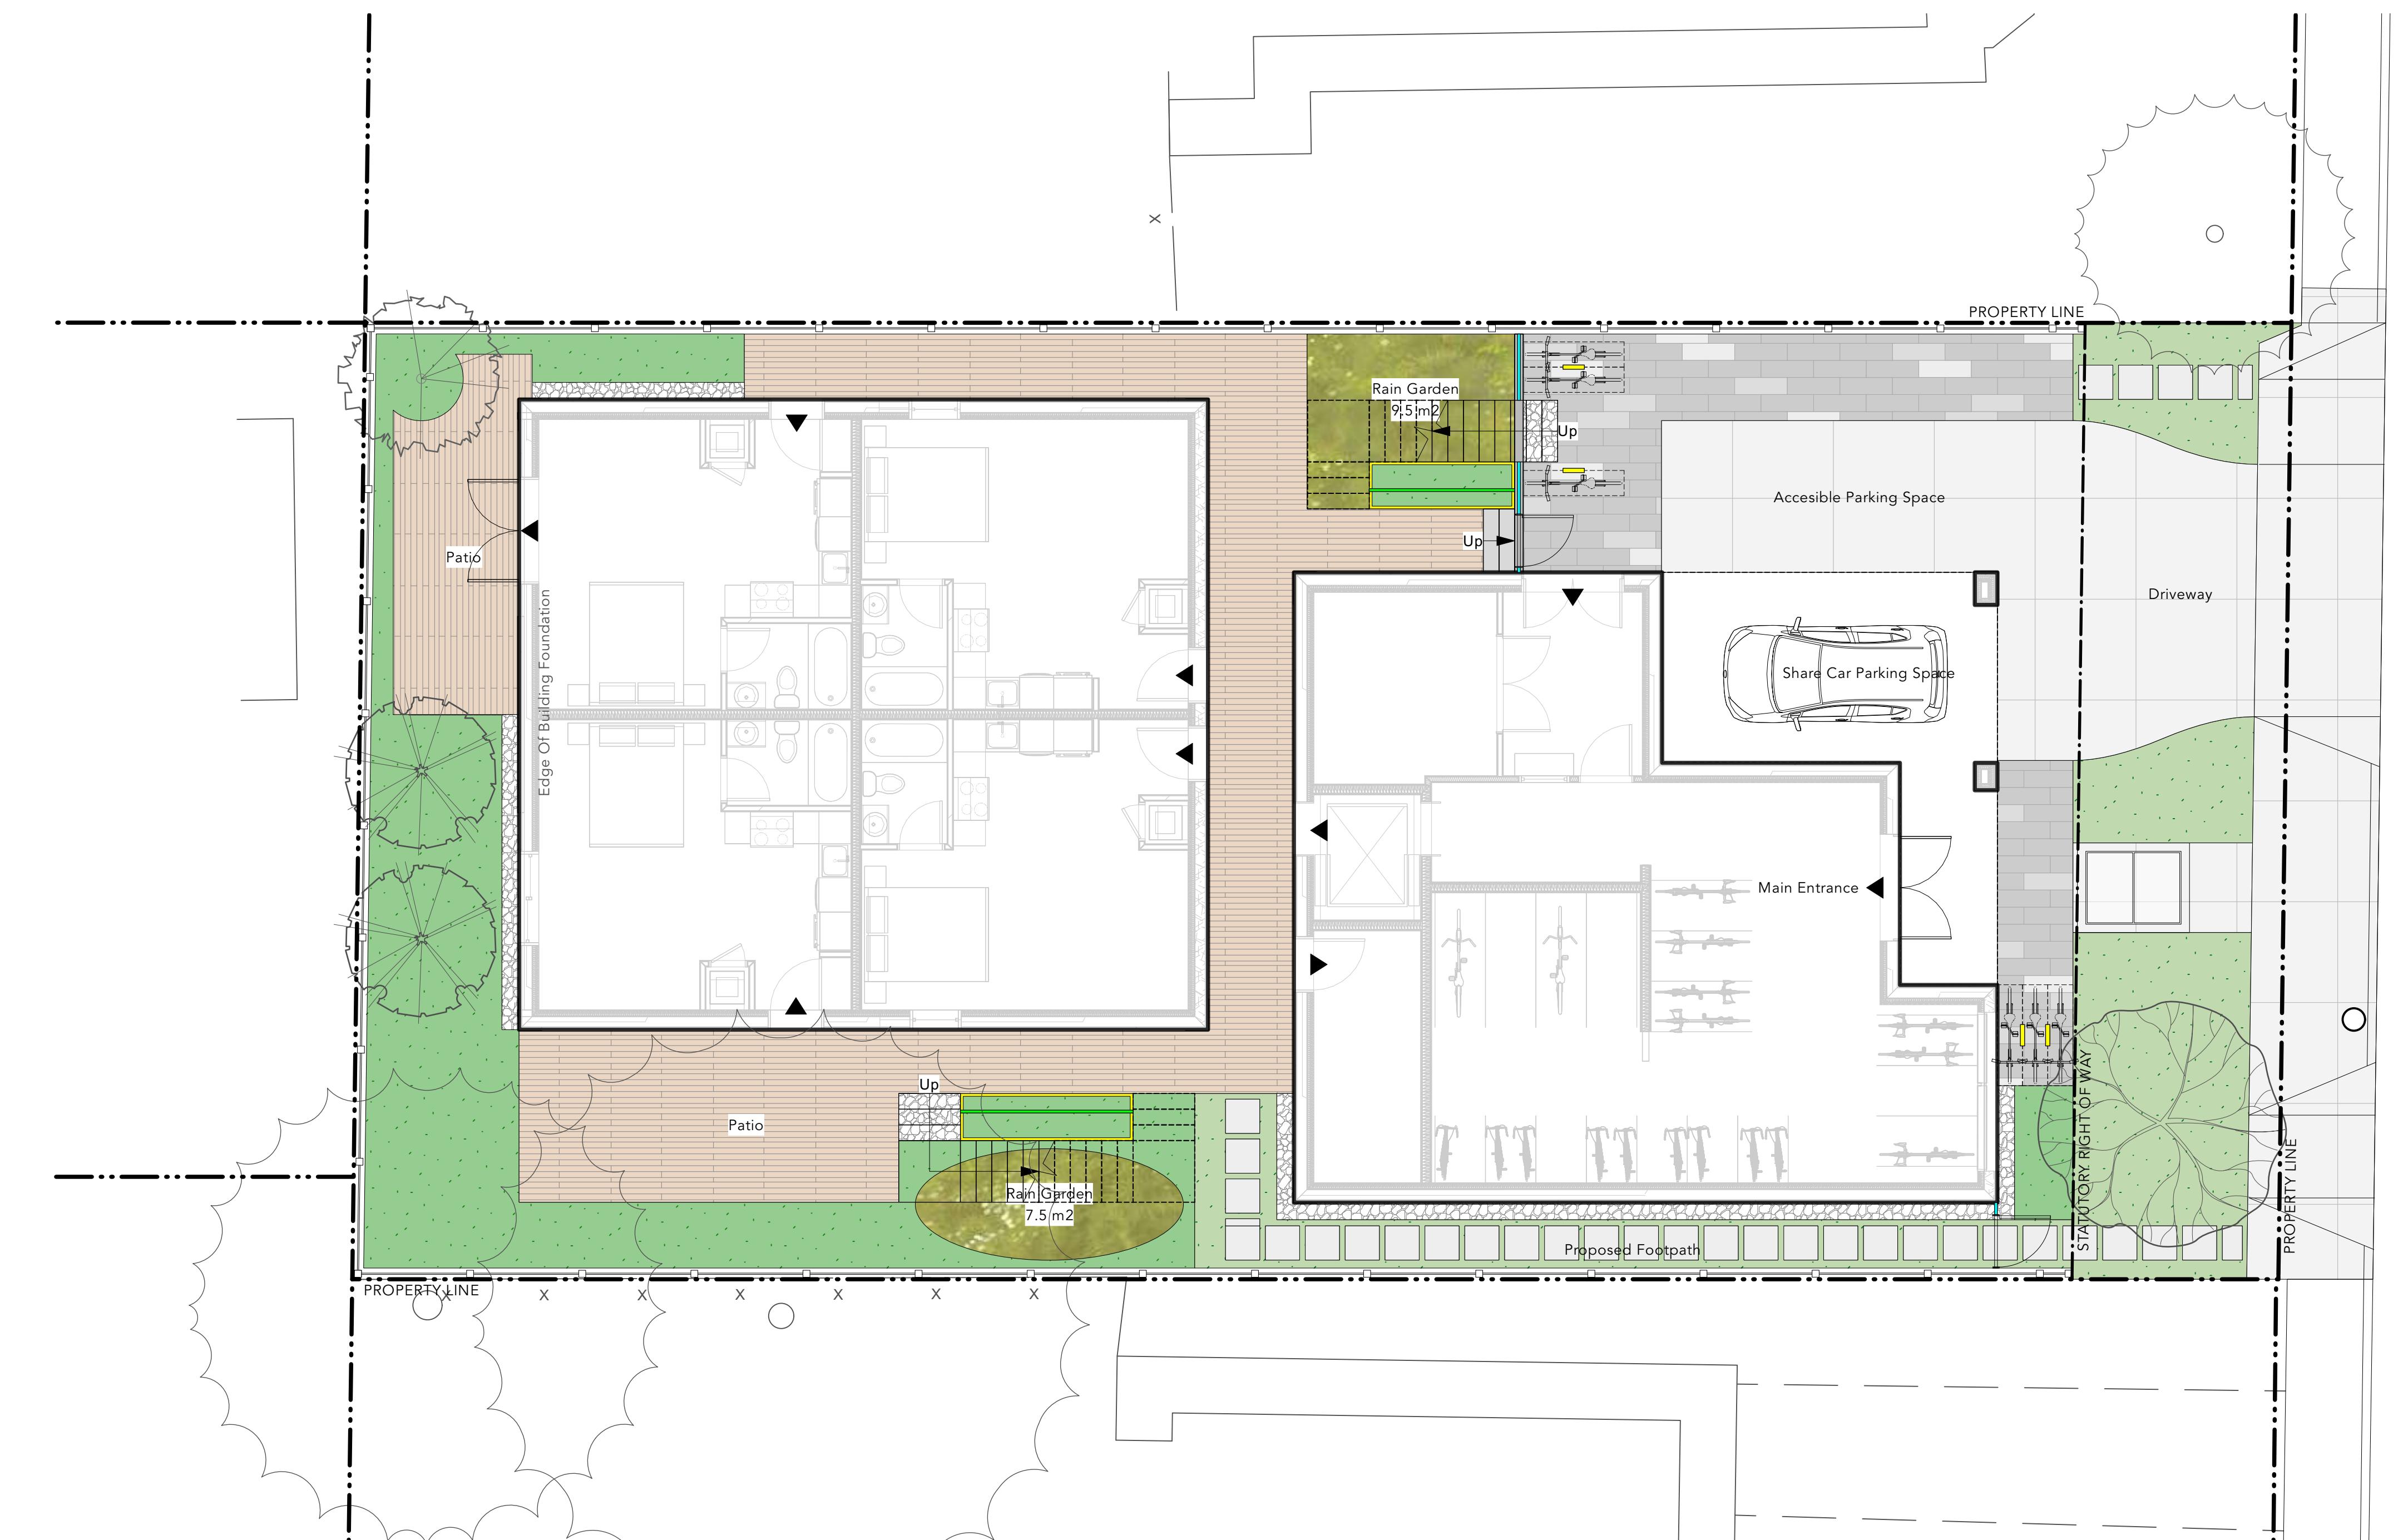


GOVERNMENT ST

## GENERAL PLANTING NOTES:

1. ALL PLANTING SHALL BE IN ACCORDANCE WITH BC LANDSCAPE STANDARD, LATEST EDITION
2. ALL TREE AND SHRUB AREAS TO BE MULCHED WITH 50MM (2") OF MEDIUM FINE MULCH, LESS THAN 50MM (2") DIAMETER.
3. ROOTZONE TO REST ON TAMPED SOIL
4. SHRUBS: PREPARE PLANTING HOLES AS SPECIFIED. PLANT AT THE SAME GRADE AS NURSERY. WATER AND FERTILIZE AS SPECIFIED. ENSURE POSITIVE DRAINAGE THROUGHOUT PLANTING BED
5. TREE SIZE AND SPACING TO BE AS PER CITY OF VANCOUVER ARBORIST
6. TREE: PREPARE PLANTING HOLES AS SPECIFIED INSTALL TOP OF ROOTZONE 6" ABOVE FINISHED GRADE OF GROWING MEDIUM. WATER AND FERTILIZE AS SPECIFIED BY NURSERY.
7. FINAL SOFTSCAPE AND GRADING LAYOUTS AS WELL AS LOCATION SPACING TO BE APPROVED BY LANDSCAPE ARCHITECTS IN THE FIELD PRIOR TO INSTALLATION
8. IN CASE OF A DISCREPANCY BETWEEN PLANT INFORMATION ON THE LIST AND ON THE PLAN, THE LATTER SHALL PREVAIL
9. ALL PLANT MATERIAL TO BE MANUALLY WATERED FROM START OF INSTALLATION THROUGH THE END OF THE WARRANTY PERIOD
10. INSTALL TREE PROTECTION FENCING AROUND ALL EXISTING TREES TO CITY OF VANCOUVER STANDARDS. INSTALL TREE PROTECTION FENCING ON NEW PLANTING IF PHASED INSTALLATION IS REQUIRED.
11. FINAL PLANT SPACING, QUANTITY AND TREE PLACEMENT HAS BEEN REVIEWED TO THE SATISFACTION OF GENERAL MANAGER OF ENGINEERING SERVICES

				New Trees Proposed		Soil Volume Required		
	Area (m <sup>2</sup> )	Soil Depth (m)	Estimated soil volume	Small	Medium	Small (m <sup>3</sup> / tree)	Medium (m <sup>3</sup> / tree)	Total (m <sup>3</sup> )
Planting Area	27	1	27	2	1	6	15	27

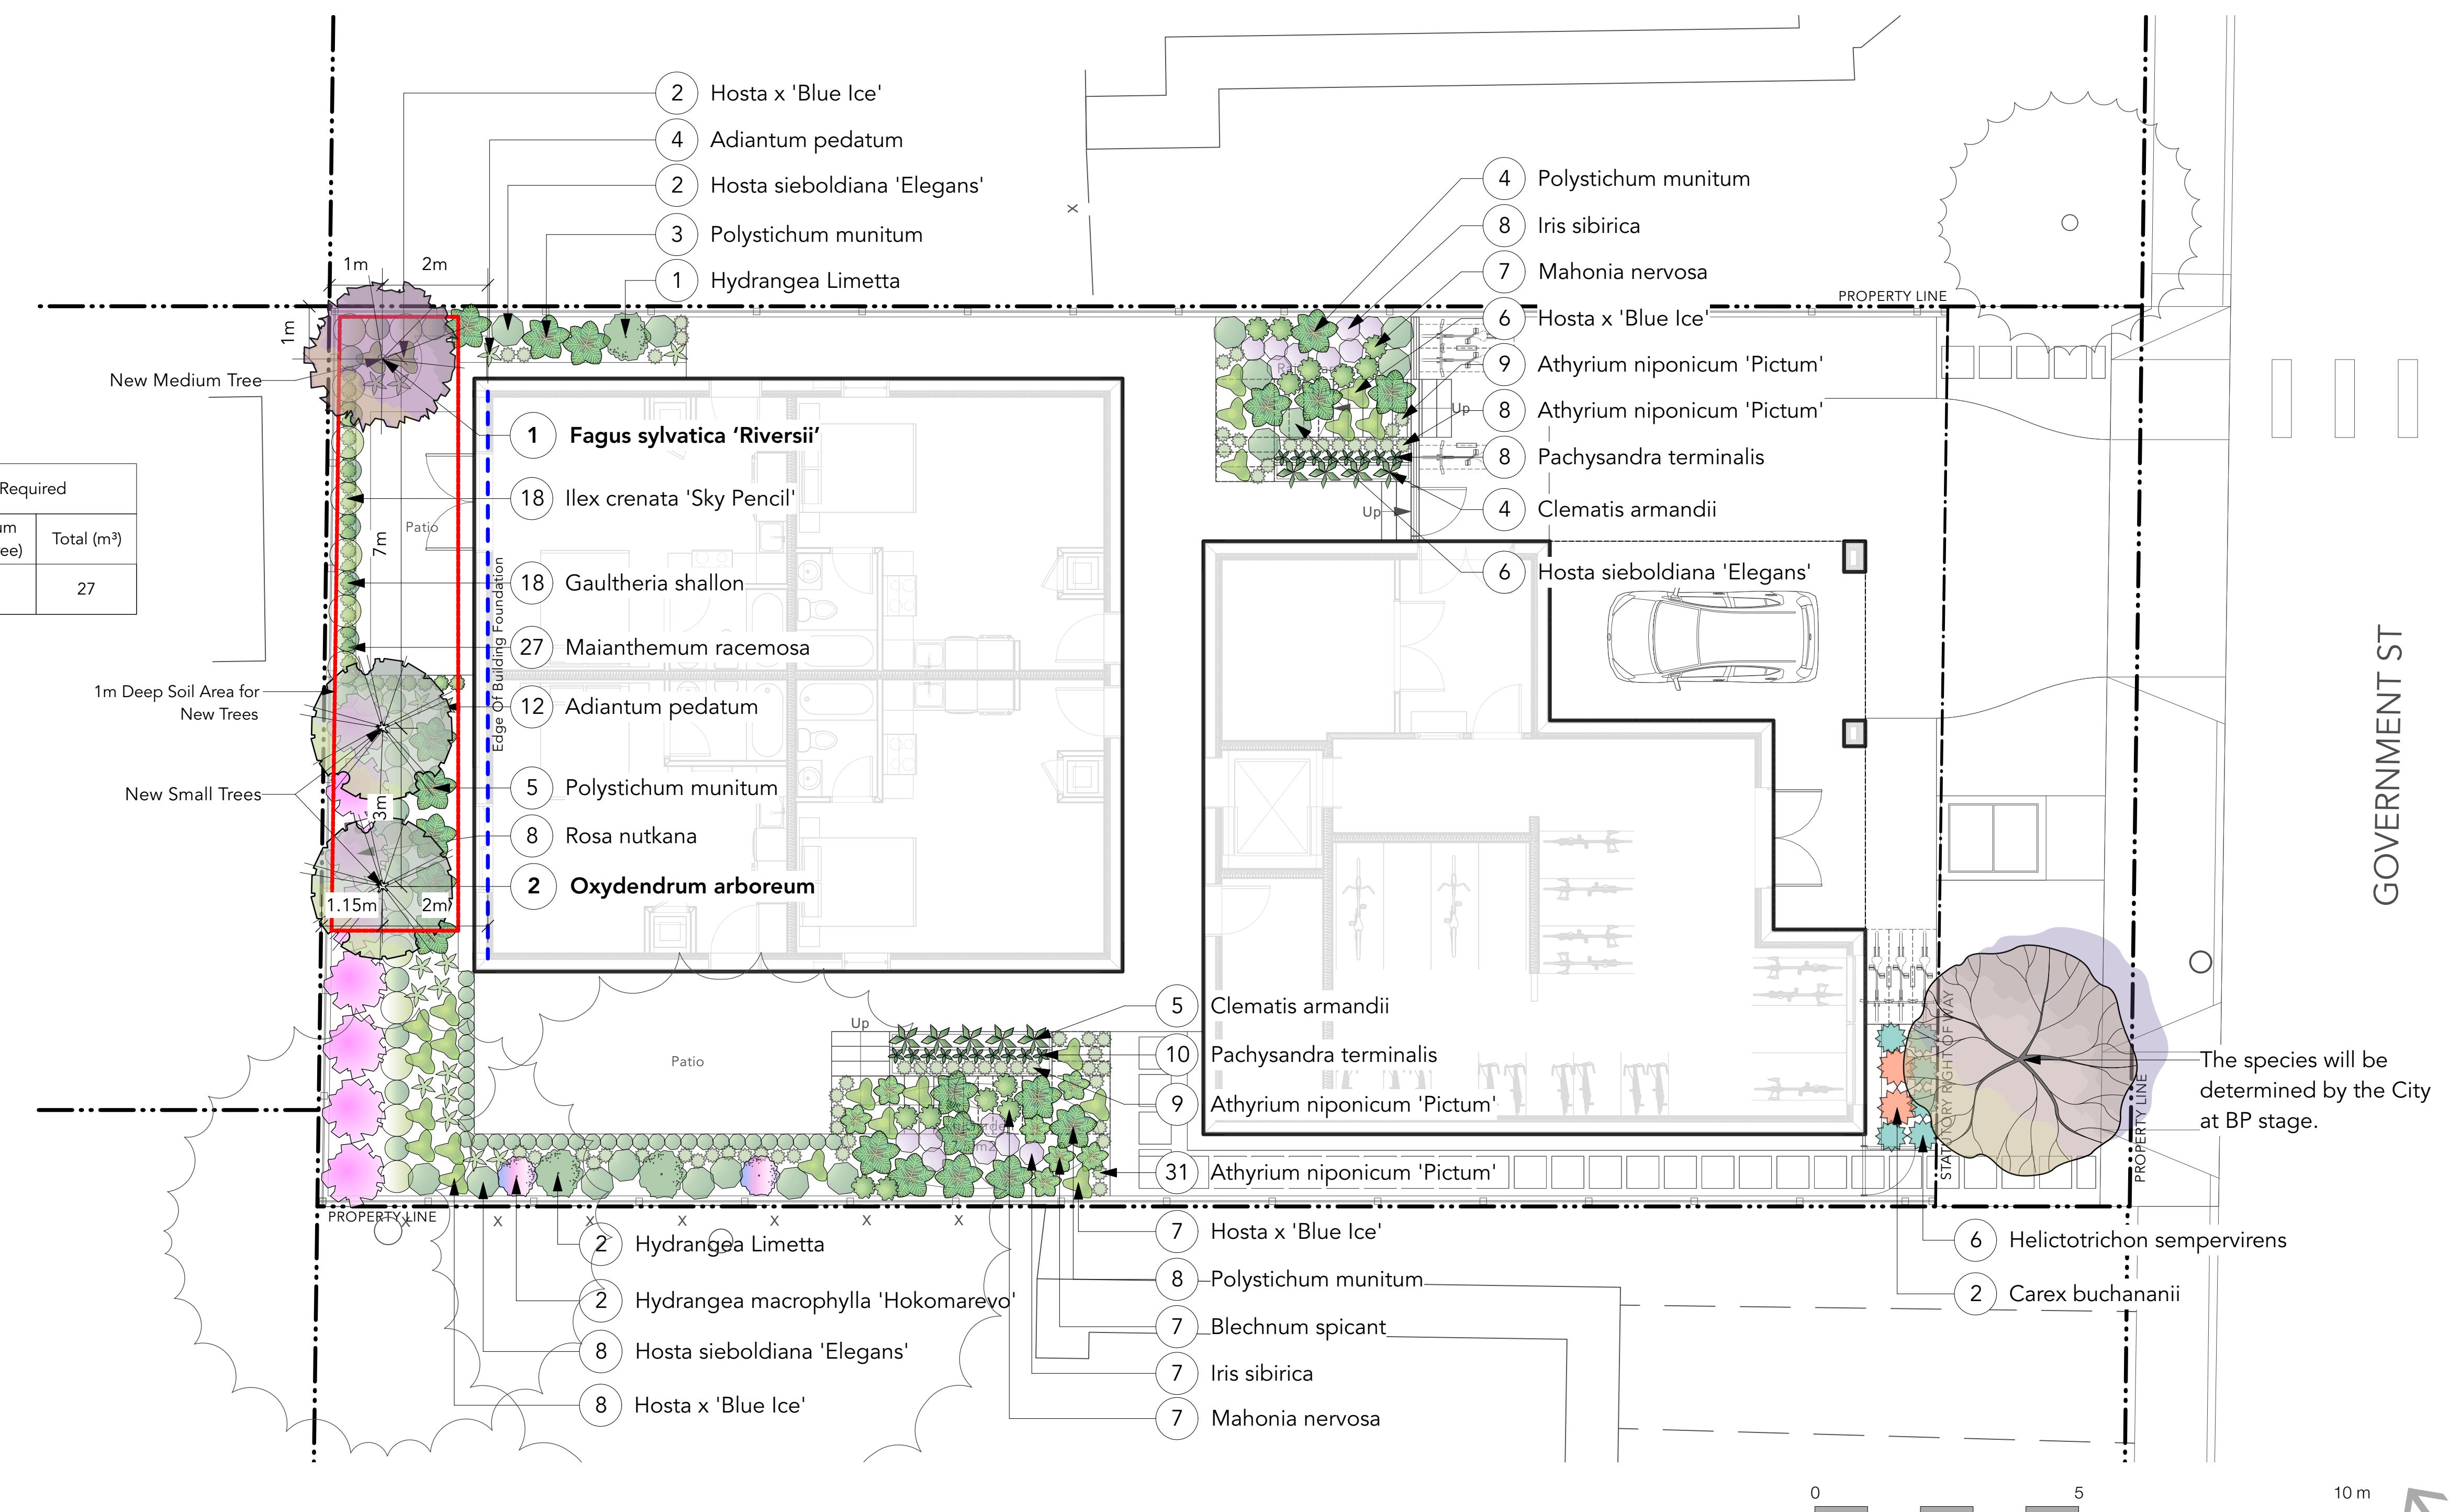


## GENERAL GRADING NOTES:

1. ALL UTILITIES TO BE STAKED OUT BY CONTRACTOR AND PROTECTED FOR DURATION OF CONSTRUCTION PERIOD.
2. UNLESS OTHERWISE NOTED, PROVIDE A MINIMUM 2% SLOPE ON ALL HARD AND SOFT LANDSCAPE AREAS TO ENSURE POSITIVE DRAINAGE AWAY FROM BUILDINGS OR TO DRAINAGE STRUCTURES. MAXIMUM 3:1 SLOPE IN SOFT LANDSCAPE AREAS.
3. THE LAYOUT OF ALL PROPOSED HARDSCAPE ITEMS, SITE FURNITURE, LIGHTING, PLANTING BEDS AND OTHER MATERIALS IS TO BE STAKED OUT BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
4. ALL SUBSTITUTIONS OF SPECIFIED MATERIALS TO BE APPROVED BY LANDSCAPE ARCHITECT.
5. REFER TO CIVIL FOR EXCAVATION DEPTHS, BACKFILL, AND BASE MATERIAL FOR ALL LANDSCAPE ITEMS SHOWN ON PLAN.
6. SLOPE SHALL MATCH EXISTING GRADE ALONG ALL PROPERTY LINES.
7. REFER TO CIVIL ENGINEER'S PRECISE GRADING PLANS FOR SITE GRADING PLANS FOR SITE GRADING, DRAINAGE, AND UTILITY LOCATIONS. IF ACTUAL SITE CONDITIONS VARY FROM WHAT IS SHOWN ON THE LANDSCAPE ARCHITECT'S PLANS, THE CONTRACTOR SHALL CONTACT THE OWNER'S REPRESENTATIVE AND LANDSCAPE ARCHITECT FOR DIRECTION AS TO HOW TO PROCEED.
8. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE ACTUAL LOCATION AND ELEVATION IN THE FIELD PRIOR TO BEGINNING CONSTRUCTION. THE CONTRACTOR SHALL PROTECT ALL EXISTING UTILITIES AND SHALL BE RESPONSIBLE FOR ANY DAMAGE TO EXISTING UTILITIES ENCOUNTERED DURING CONSTRUCTION.
9. ALL PROPOSED GRADES ARE TO MEET AND BLEND IN WITH EXISTING GRADING AT PROJECT LIMITS, GRADING LIMITS, AND EXISTING SIDEWALK. PRECISE ELEVATIONS INDICATED ON PLANS TO BE VERIFIED IN FIELD TO AS-BUILT CONDITION.
10. THE DEBRIS CREATED BY LANDSCAPE GRADING OPERATIONS SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE DISPOSED OF LEGALLY OFF SITE.
11. FINAL GRADING SHALL BE REVIEWED BY THE LANDSCAPE ARCHITECT IN THE FIELD PRIOR TO INSTALLATION OF PLANTING.

## GRADING LEGEND


SYMBOL	DESCRIPTION
EL 0.00	PROPOSED ELEVATION
FFE 0.00	FINISHED FLOOR ELEVATION
TW 0.00	TOP OF WALL ELEVATION
BW 0.00	BOTTOM OF WALL ELEVATION
TS 0.00	TOP OF STAIRS ELEVATION
BS 0.00	BOTTOM OF STAIRS ELEVATION

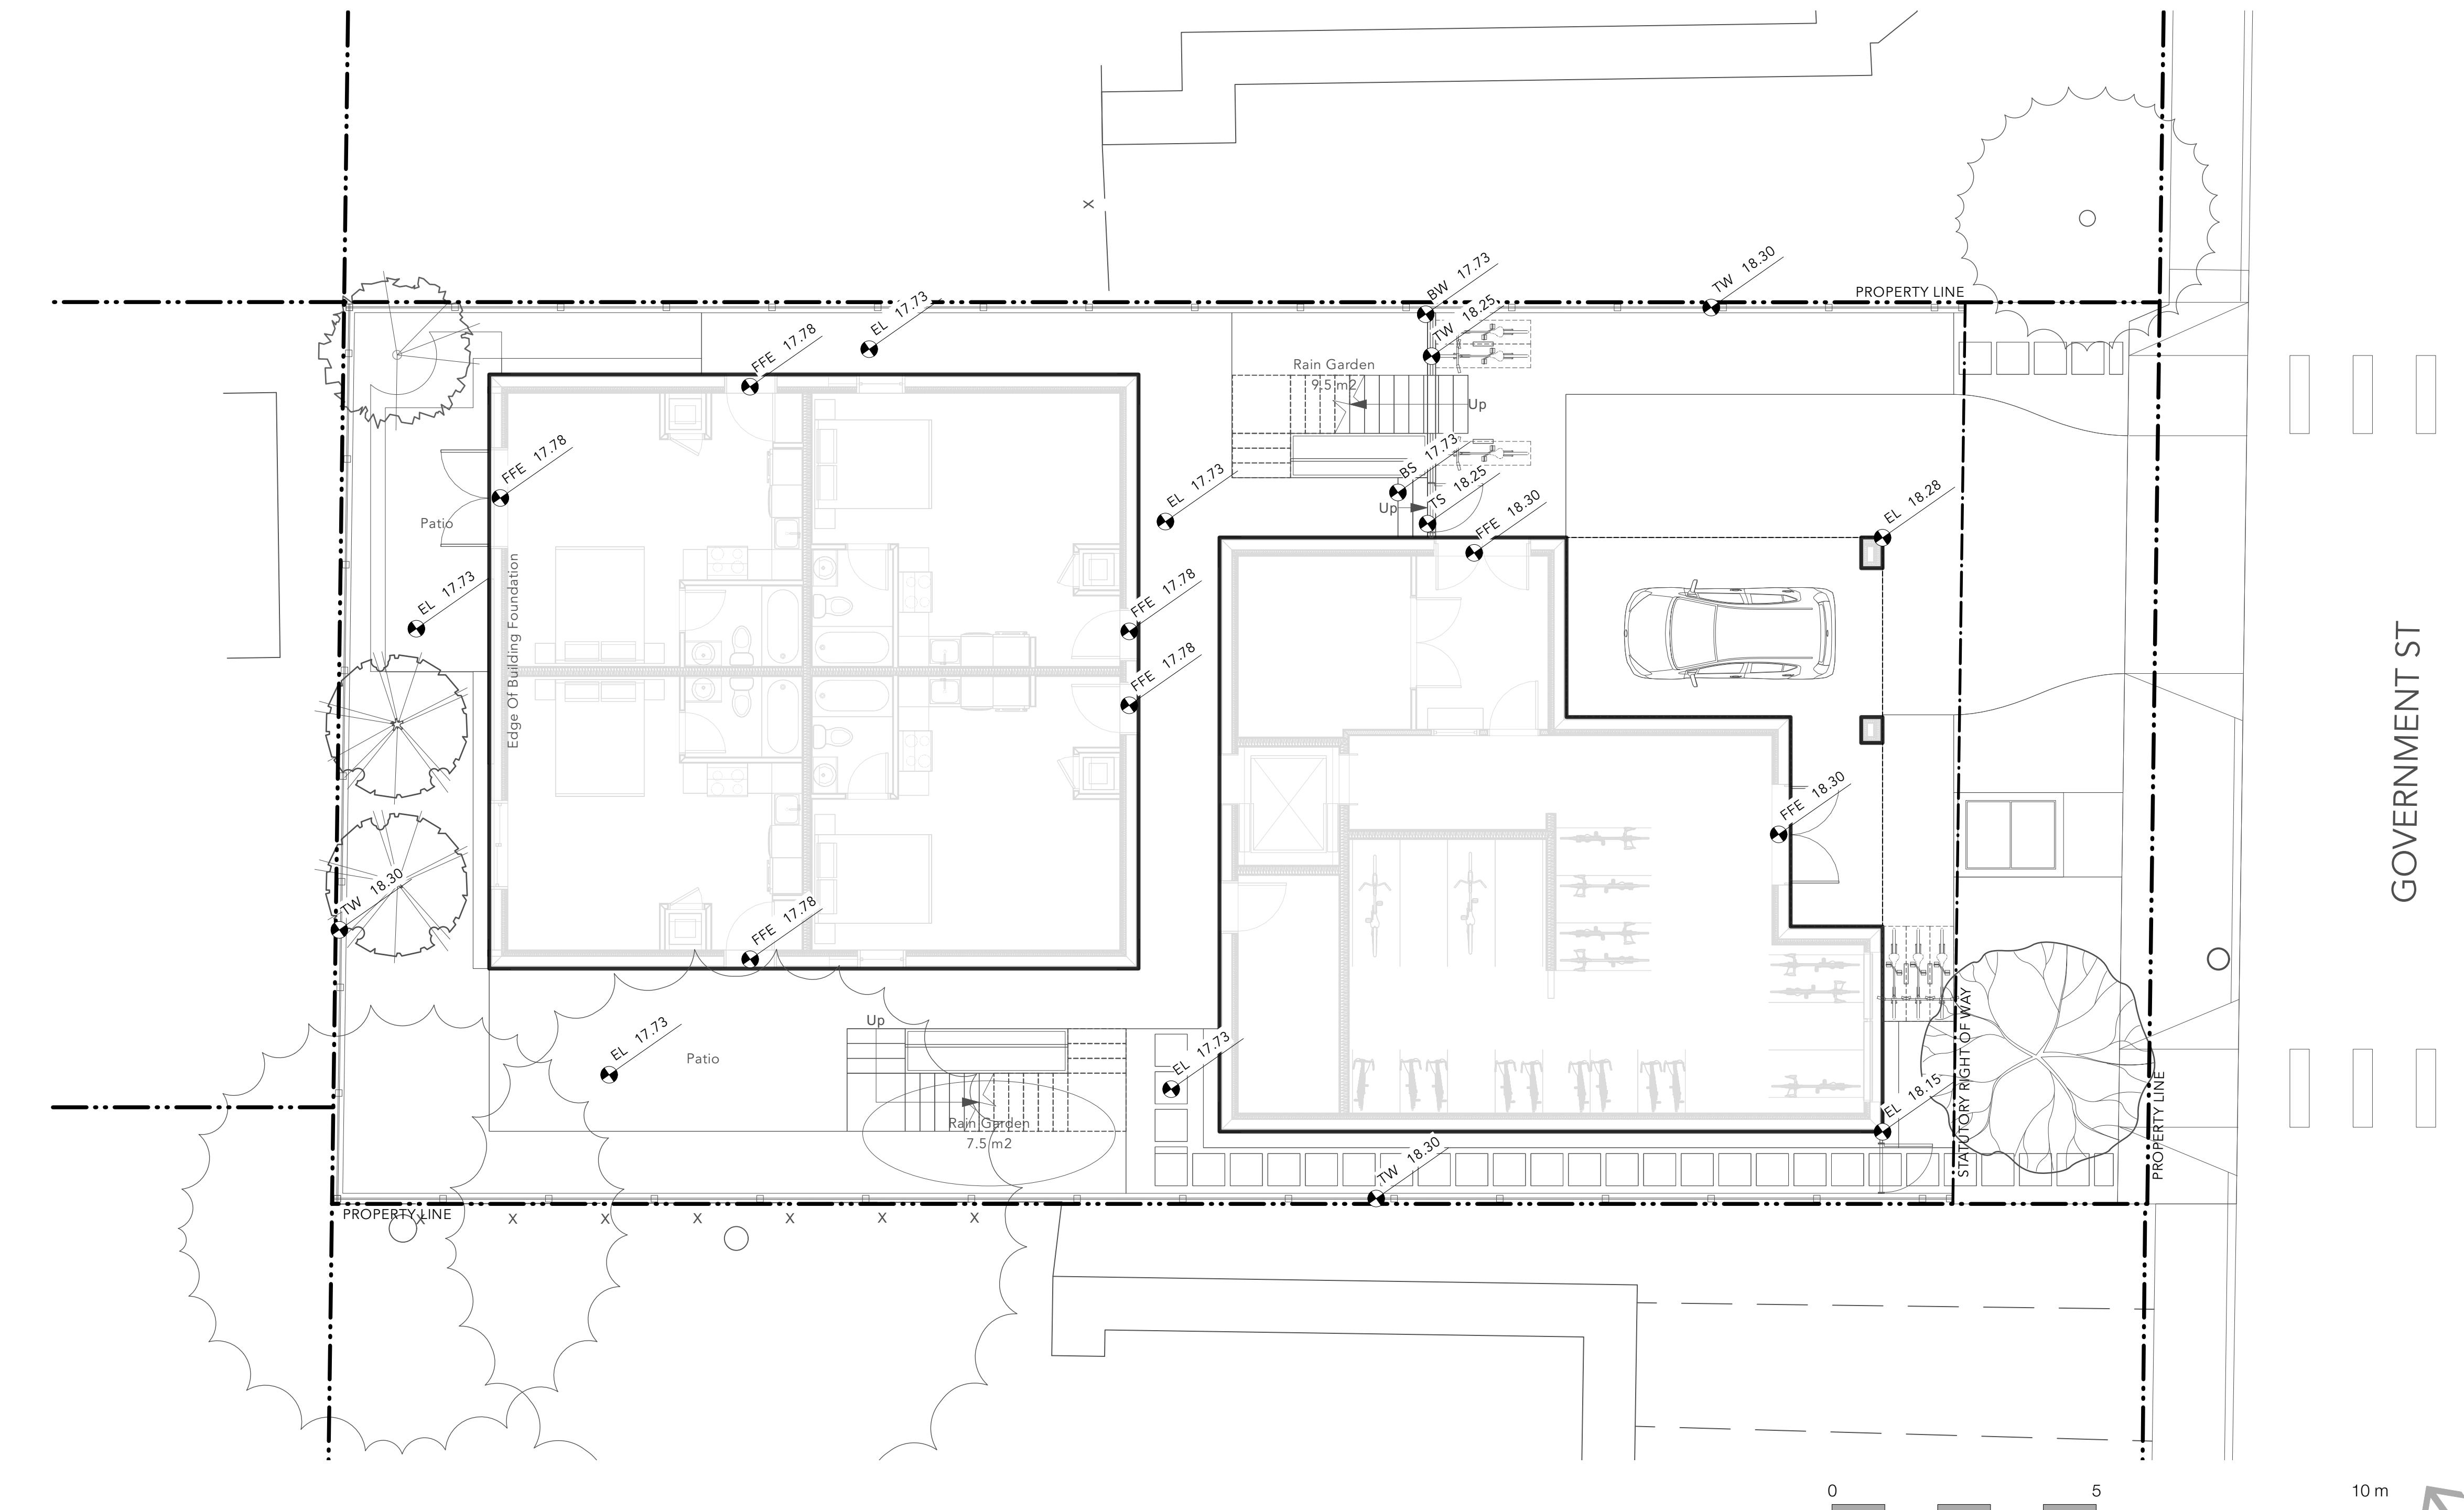

## **UTILITY LEGEND**

SYMBOL	DESCRIPTION
 EX-S 2000 VITC	<b>EXISTING UTILITIES</b> See Civil Drawings for Details
	<b>PROPOSED UTILITIES</b> See Civil Drawings for Details

## EXISTING SINGLE FAMILY HOUSE

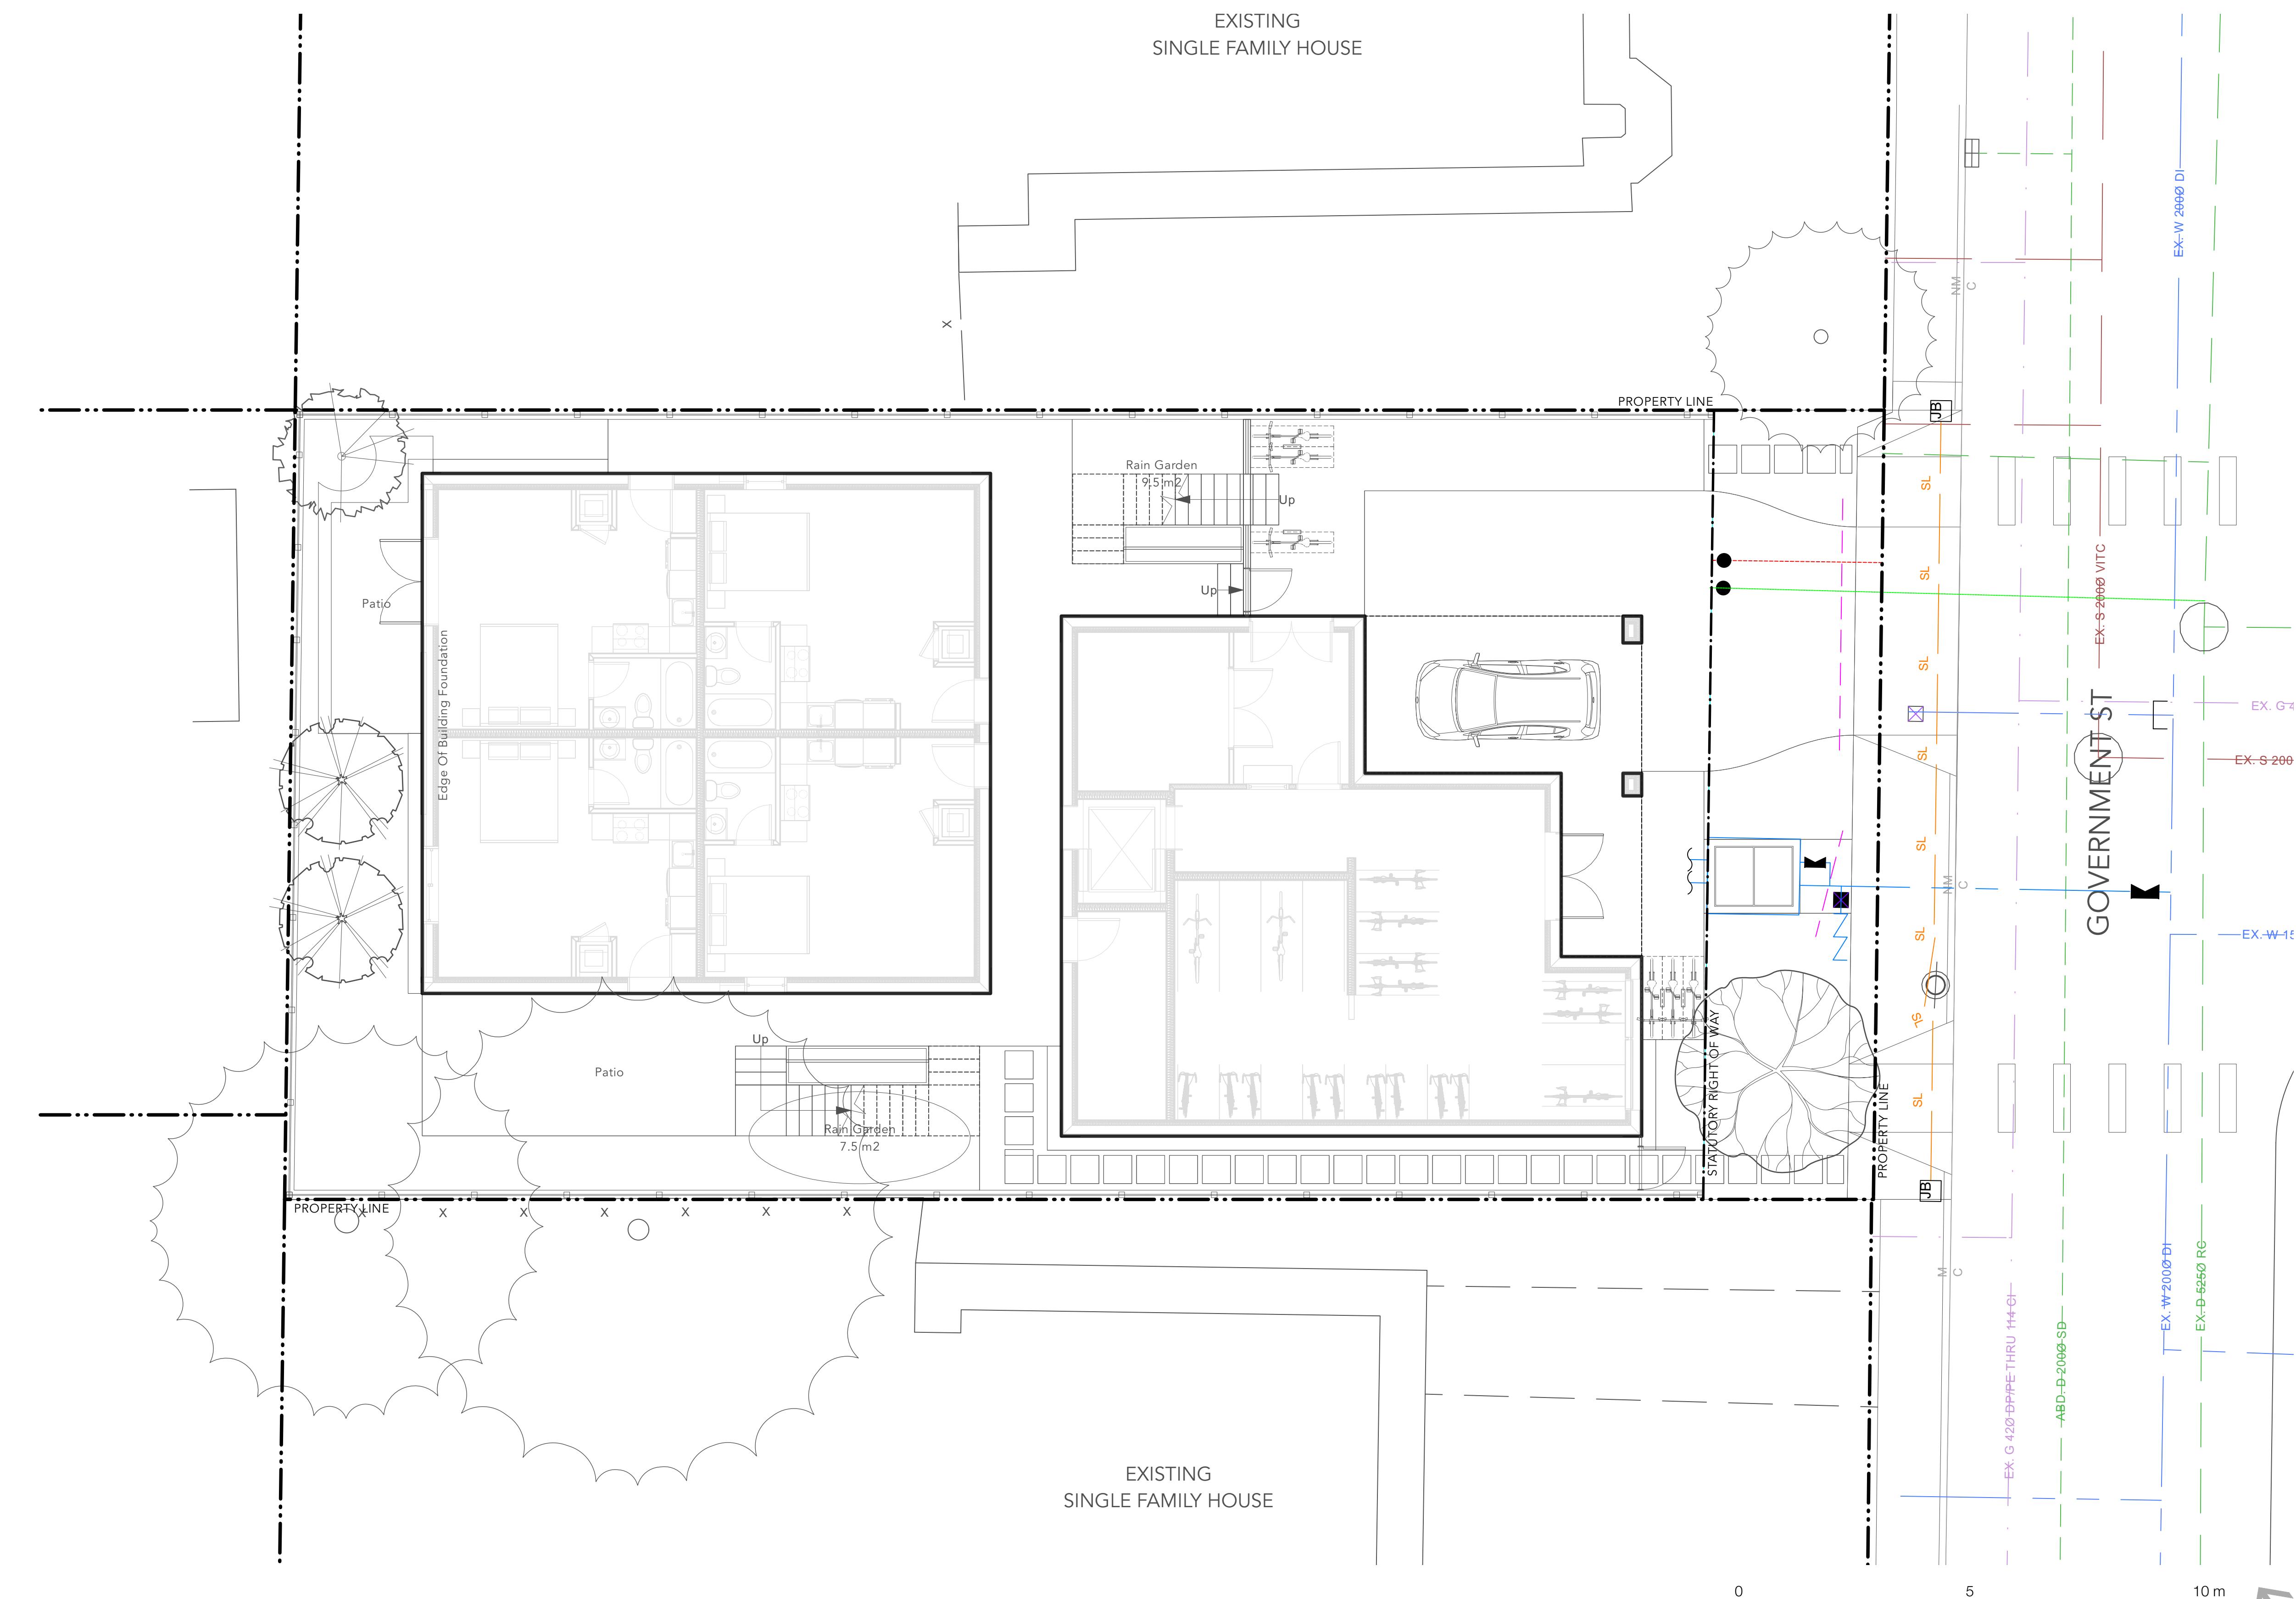

## EXISTING SINGLE FAMILY HOUSE

# G | ALA

Gauthier + Associates Landscape Architects Inc.

I	Reissued for Rezoning	2024-10-04
H	Reissued for Rezoning	2024-09-27
G	Reissued for Rezoning	2024-09-09


50 Government Street  
Concept Design  
50 Government Street  
Victoria, BC

# L1.3

## UTILITY PLAN - LEVEL 1

## STORMWATER MANAGEMENT LEGEND

SYMBOL	DESCRIPTION
	PERMEABLE AREA Total: 237.2 sqm
	IMPERVIOUS AREA Total: 69.9 sqm

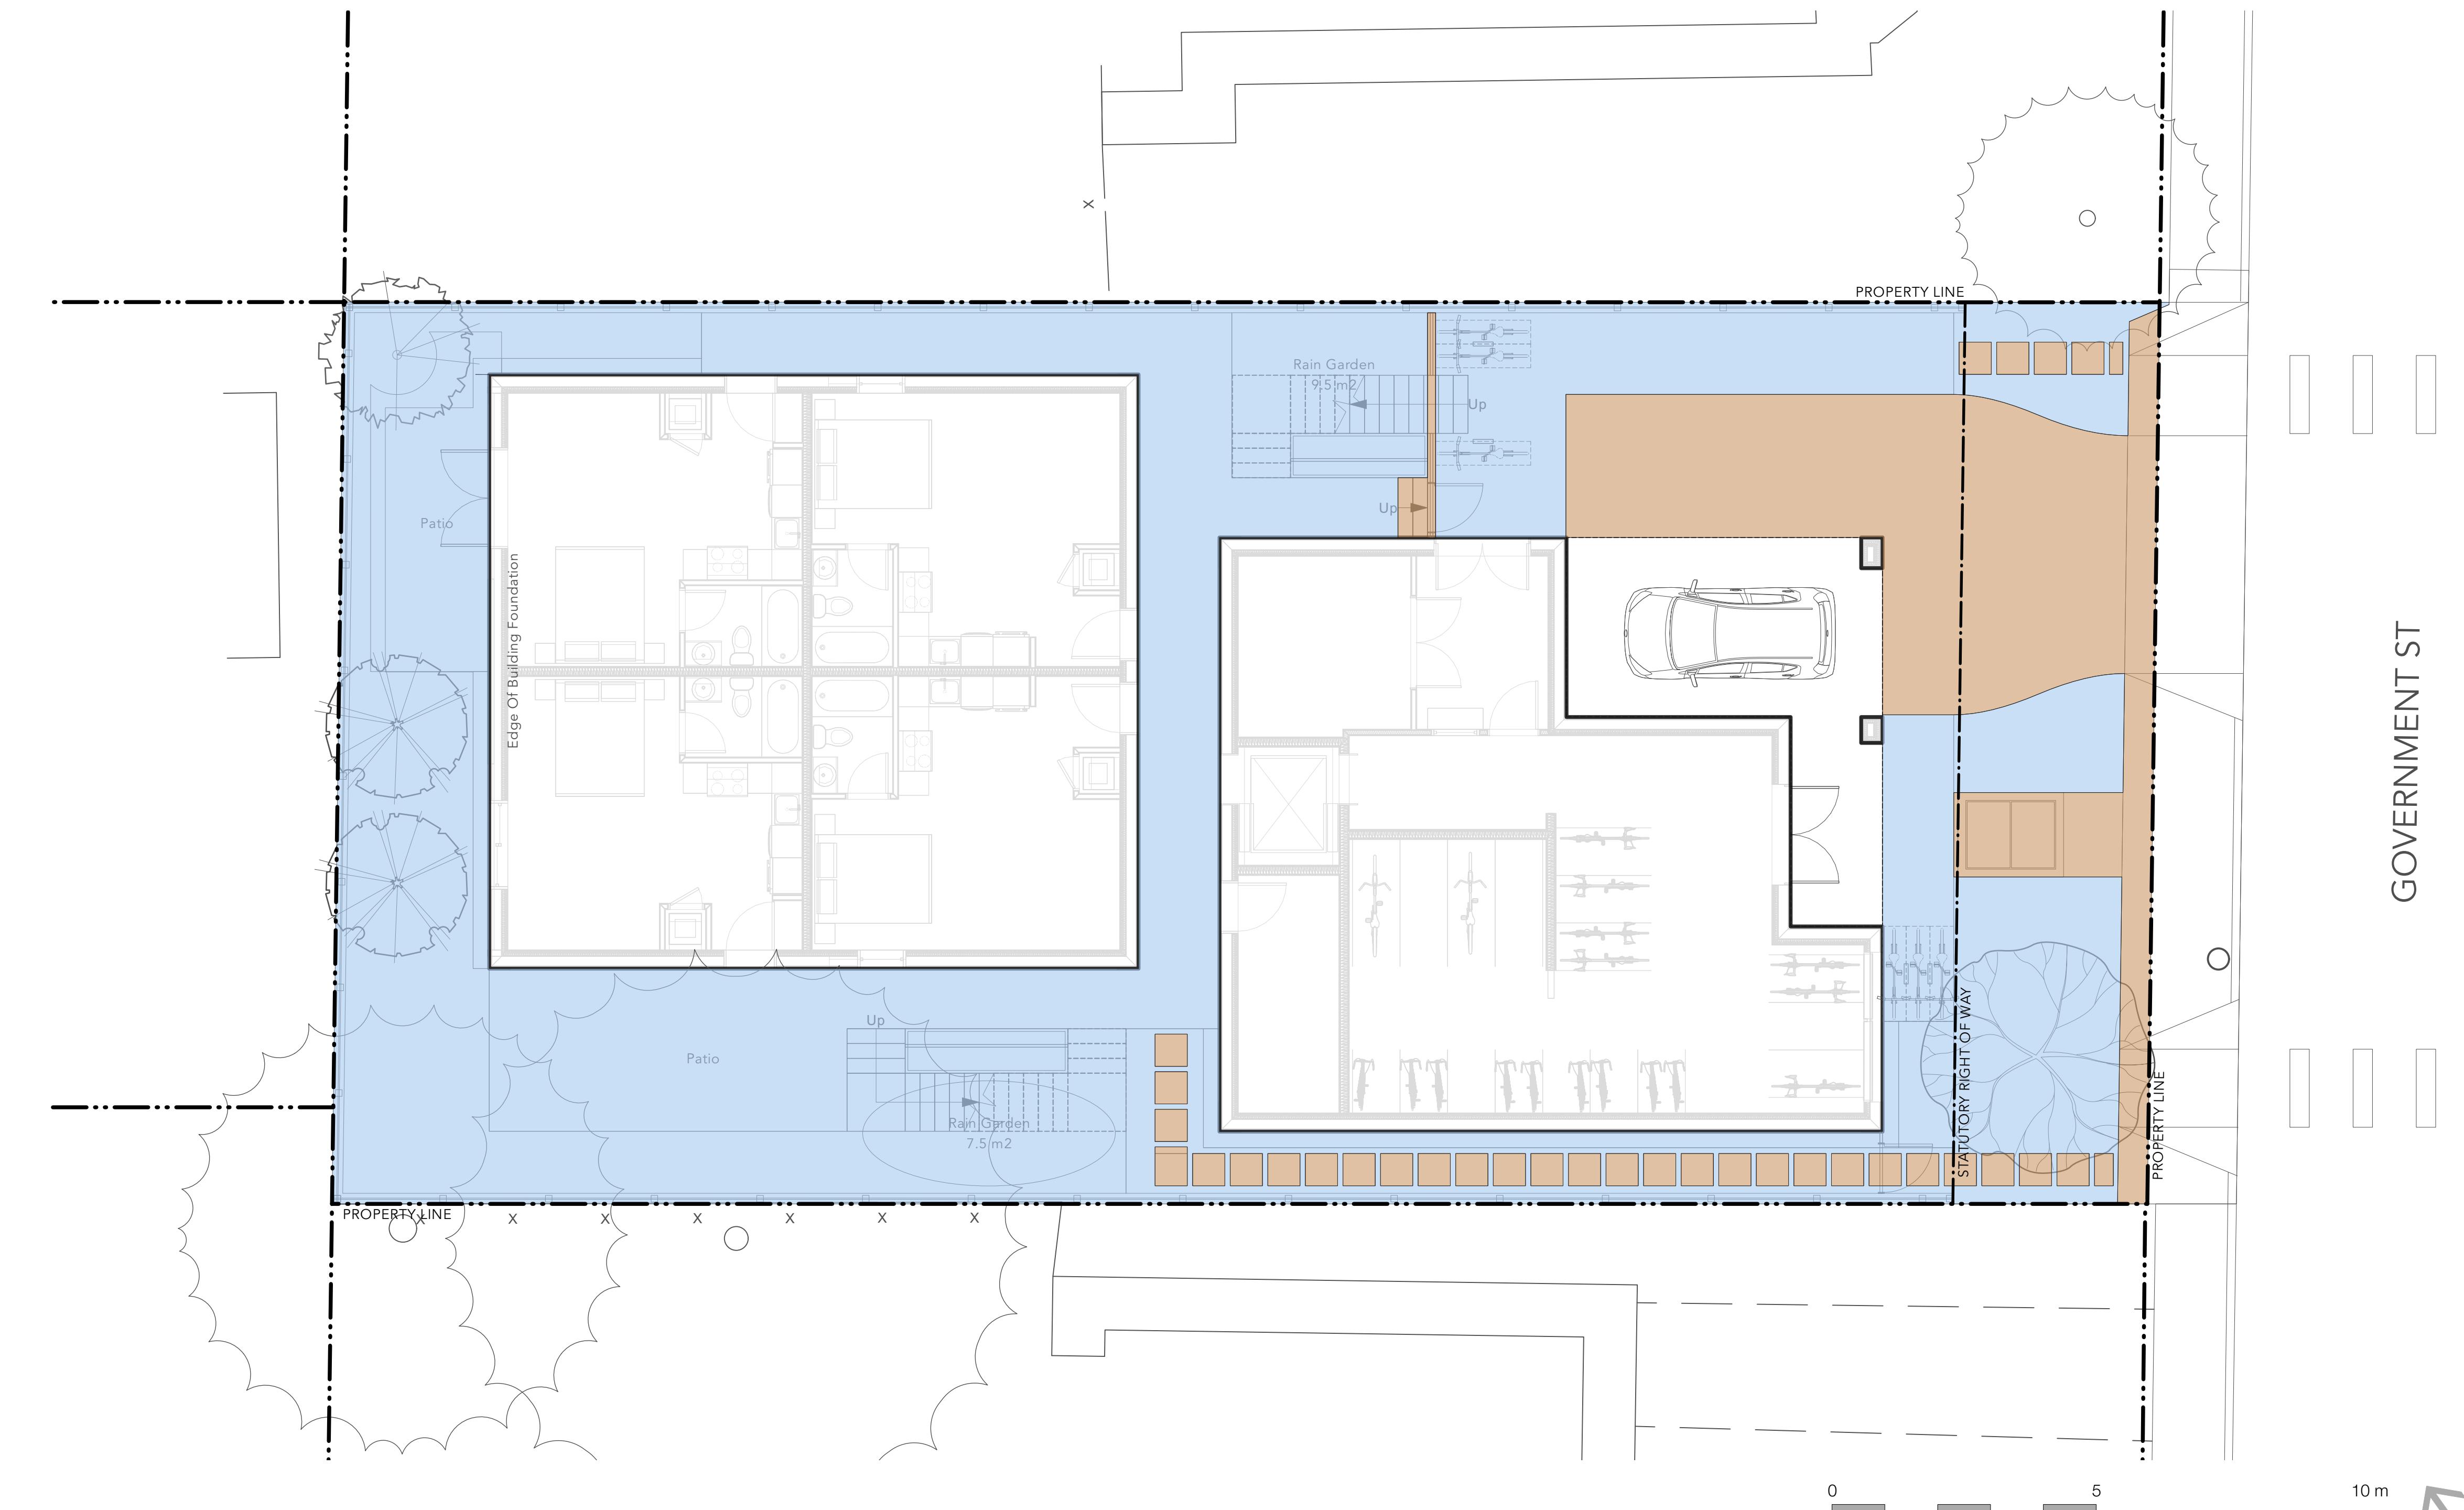


## GENERAL LAYOUT + MATERIALS NOTES:

1. ALL DIMENSIONS ARE METRIC UNLESS OTHERWISE NOTED. VERIFY ALL DIMENSIONS WITH FIELD CONDITIONS. REPORT ANY DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW AND RESPONSE.
2. ALL UTILITIES TO BE STAKED OUT BY CONTRACTOR AND PROTECTED FOR DURATION OF CONSTRUCTION PERIOD.
3. UNLESS OTHERWISE NOTED, PROVIDE A MINIMUM 2% SLOPE ON ALL HARD AND SOFT LANDSCAPE AREAS TO ENSURE POSITIVE DRAINAGE AWAY FROM BUILDINGS OR TO DRAINAGE STRUCTURES. MAXIMUM 3:1 SLOPE IN SOFT LANDSCAPE AREAS.
4. THE LAYOUT OF ALL HARDSCAPE ITEMS, SITE FURNISHINGS, BOULDERS, LANDSCAPE LIGHTING, PLANTING BEDS AND OTHER MATERIALS IS TO BE STAKED OUT BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
5. ALL SUBSTITUTIONS OF SPECIFIED MATERIALS TO BE APPROVED BY LANDSCAPE ARCHITECT.
6. THIS PLAN IS "NOT FOR CONSTRUCTION" AND IS TO BE SUBMITTED FOR REVIEW TO ENGINEERING SERVICES A MINIMUM OF 8 WEEKS PRIOR TO THE START OF ANY CONSTRUCTION PROPOSED FOR PUBLIC PROPERTY. NO WORK ON PUBLIC PROPERTY MAY BEGIN UNTIL SUCH PLANS RECEIVE "FOR CONSTRUCTION" APPROVAL AND RELATED PERMITS ARE ISSUED. PLEASE CONTACT ENGINEERING, DEVELOPMENT SERVICES AND/OR YOUR ENGINEERING, BUILDING SITE INSPECTOR FOR DETAILS.
7. MAINTENANCE AND IRRIGATION WILL BE PROVIDED TO ALL AREAS.


## MATERIALS LEGEND

SYMBOL	DESCRIPTION
	PAVING TYPE 2 Wood Deck
	PLANTING TYPE 2 Shrub Area
	PLANTER TYPE 1 Metal Railing Planter 12" Deep, 13" High
	METAL STAIRS See Arch for Details
	GUARDRAIL 3.5' High
	METAL TRELLIS FOR VINE CLIMBING
-----	FLOOR ABOVE

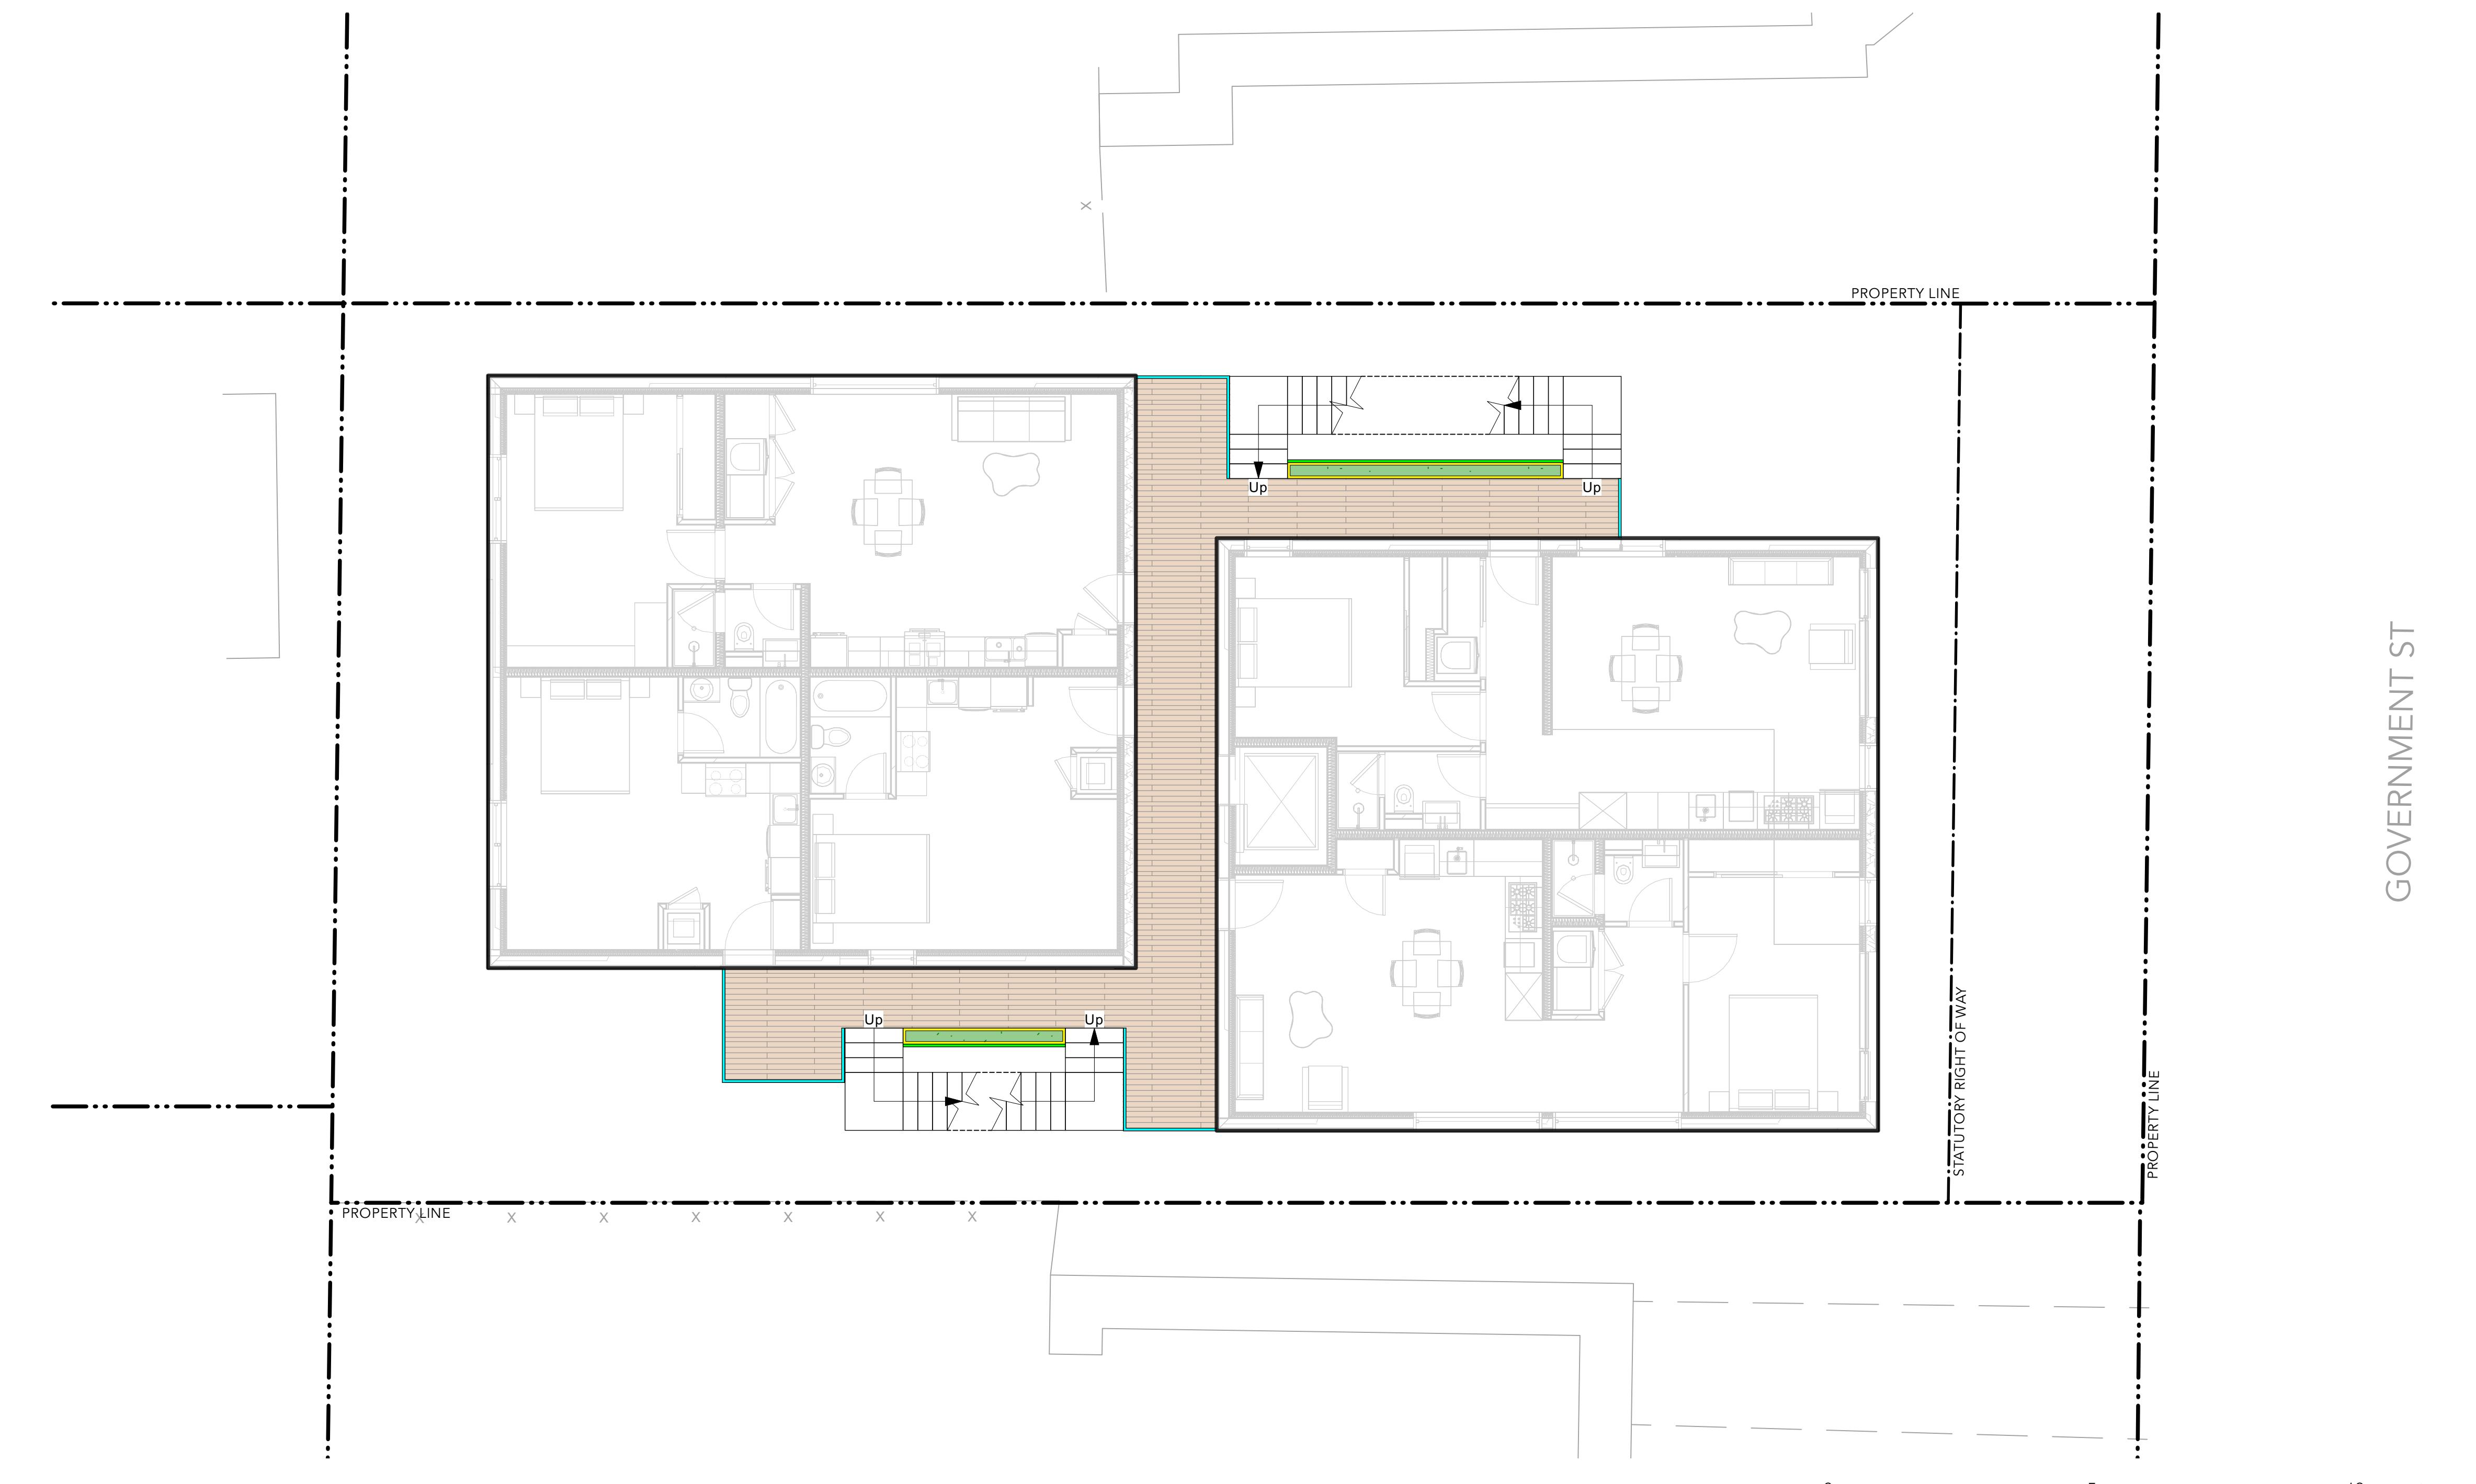

## GENERAL PLANTING NOTES:

1. ALL PLANTING SHALL BE IN ACCORDANCE WITH BC LANDSCAPE STANDARD, LATEST EDITION
2. ALL TREE AND SHRUB AREAS TO BE MULCHED WITH 50MM (2") OF MEDIUM FINE MULCH, LESS THAN 50MM (2") DIAMETER.
3. ROOTZONE TO REST ON TAMPED SOIL
4. SHRUBS: PREPARE PLANTING HOLES AS SPECIFIED. PLANT AT THE SAME GRADE AS NURSERY. WATER AND FERTILIZE AS SPECIFIED. ENSURE POSITIVE DRAINAGE THROUGHOUT PLANTING BED
5. TREE SIZE AND SPACING TO BE AS PER CITY OF VANCOUVER ARBORIST
6. TREE: PREPARE PLANTING HOLES AS SPECIFIED INSTALL TOP OF ROOTZONE 6" ABOVE FINISHED GRADE OF GROWING MEDIUM. WATER AND FERTILIZE AS SPECIFIED BY NURSERY.
7. FINAL SOFTSCAPE AND GRADING LAYOUTS AS WELL AS LOCATION SPACING TO BE APPROVED BY LANDSCAPE ARCHITECTS IN THE FIELD PRIOR TO INSTALLATION
8. IN CASE OF A DISCREPANCY BETWEEN PLANT INFORMATION ON THE LIST AND ON THE PLAN, THE LATTER SHALL PREVAIL
9. ALL PLANT MATERIAL TO BE MANUALLY WATERED FROM START OF INSTALLATION THROUGH THE END OF THE WARRANTY PERIOD
10. INSTALL TREE PROTECTION FENCING AROUND ALL EXISTING TREES TO CITY OF VANCOUVER STANDARDS. INSTALL TREE PROTECTION FENCING ON NEW PLANTING IF PHASED INSTALLATION IS REQUIRED.
11. FINAL PLANT SPACING, QUANTITY AND TREE PLACEMENT HAS BEEN REVIEWED TO THE SATISFACTION OF GENERAL MANAGER OF ENGINEERING SERVICES

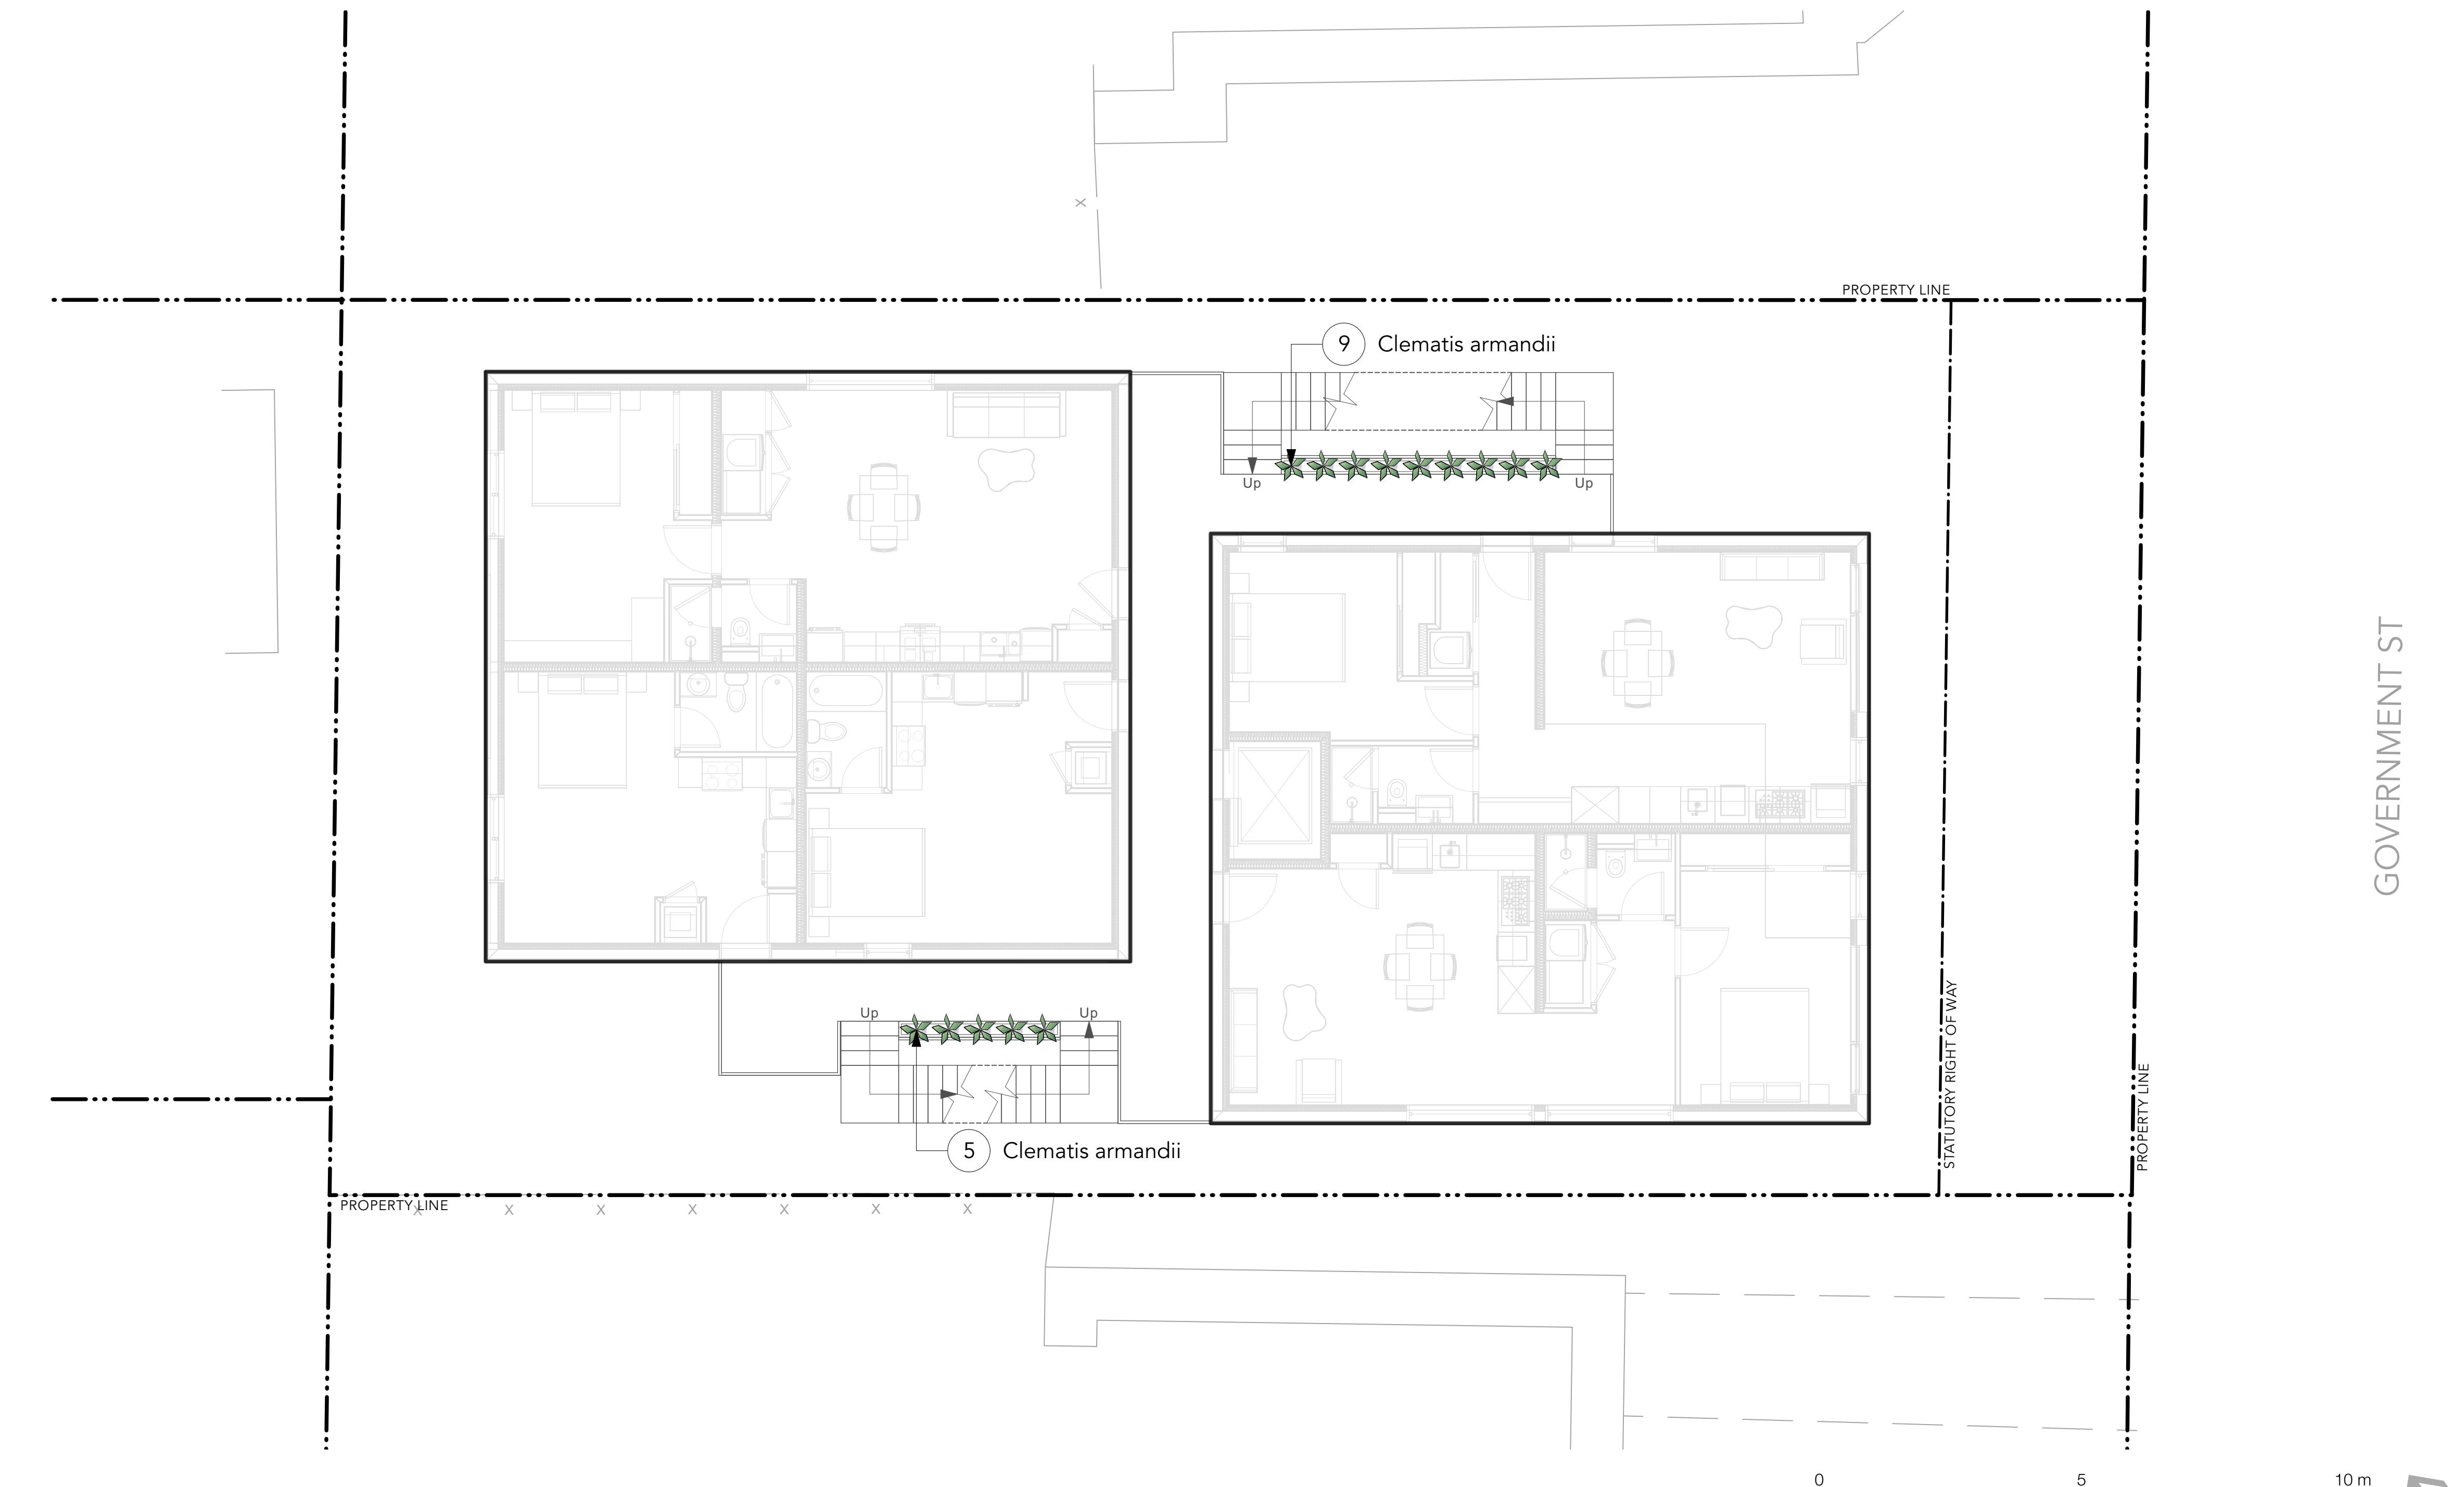


## GENERAL LAYOUT + MATERIALS NOTES:

1. ALL DIMENSIONS ARE METRIC UNLESS OTHERWISE NOTED. VERIFY ALL DIMENSIONS WITH FIELD CONDITIONS. REPORT ANY DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW AND RESPONSE.
2. ALL UTILITIES TO BE STAKED OUT BY CONTRACTOR AND PROTECTED FOR DURATION OF CONSTRUCTION PERIOD.
3. UNLESS OTHERWISE NOTED, PROVIDE A MINIMUM 2% SLOPE ON ALL HARD AND SOFT LANDSCAPE AREAS TO ENSURE POSITIVE DRAINAGE AWAY FROM BUILDINGS OR TO DRAINAGE STRUCTURES. MAXIMUM 3:1 SLOPE IN SOFT LANDSCAPE AREAS.
4. THE LAYOUT OF ALL HARDSCAPE ITEMS, SITE FURNISHINGS, BOULDERS, LANDSCAPE LIGHTING, PLANTING BEDS AND OTHER MATERIALS IS TO BE STAKED OUT BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
5. ALL SUBSTITUTIONS OF SPECIFIED MATERIALS TO BE APPROVED BY LANDSCAPE ARCHITECT.
6. THIS PLAN IS "NOT FOR CONSTRUCTION" AND IS TO BE SUBMITTED FOR REVIEW TO ENGINEERING SERVICES A MINIMUM OF 8 WEEKS PRIOR TO THE START OF ANY CONSTRUCTION PROPOSED FOR PUBLIC PROPERTY. NO WORK ON PUBLIC PROPERTY MAY BEGIN UNTIL SUCH PLANS RECEIVE "FOR CONSTRUCTION" APPROVAL AND RELATED PERMITS ARE ISSUED. PLEASE CONTACT ENGINEERING, DEVELOPMENT SERVICES AND/OR YOUR ENGINEERING, BUILDING SITE INSPECTOR FOR DETAILS.
7. MAINTENANCE AND IRRIGATION WILL BE PROVIDED TO ALL AREAS.


## MATERIALS LEGEND

SYMBOL	DESCRIPTION
	PAVING TYPE 2 Wood Deck
	PLANTING TYPE 2 Shrub Area
	PLANTER TYPE 1 Metal Railing Planter 12" Deep, 13" High
	METAL STAIRS See Arch for Details
	GUARDRAIL 3.5' High
	METAL TRELLIS FOR VINE CLIMBING
	FLOOR ABOVE

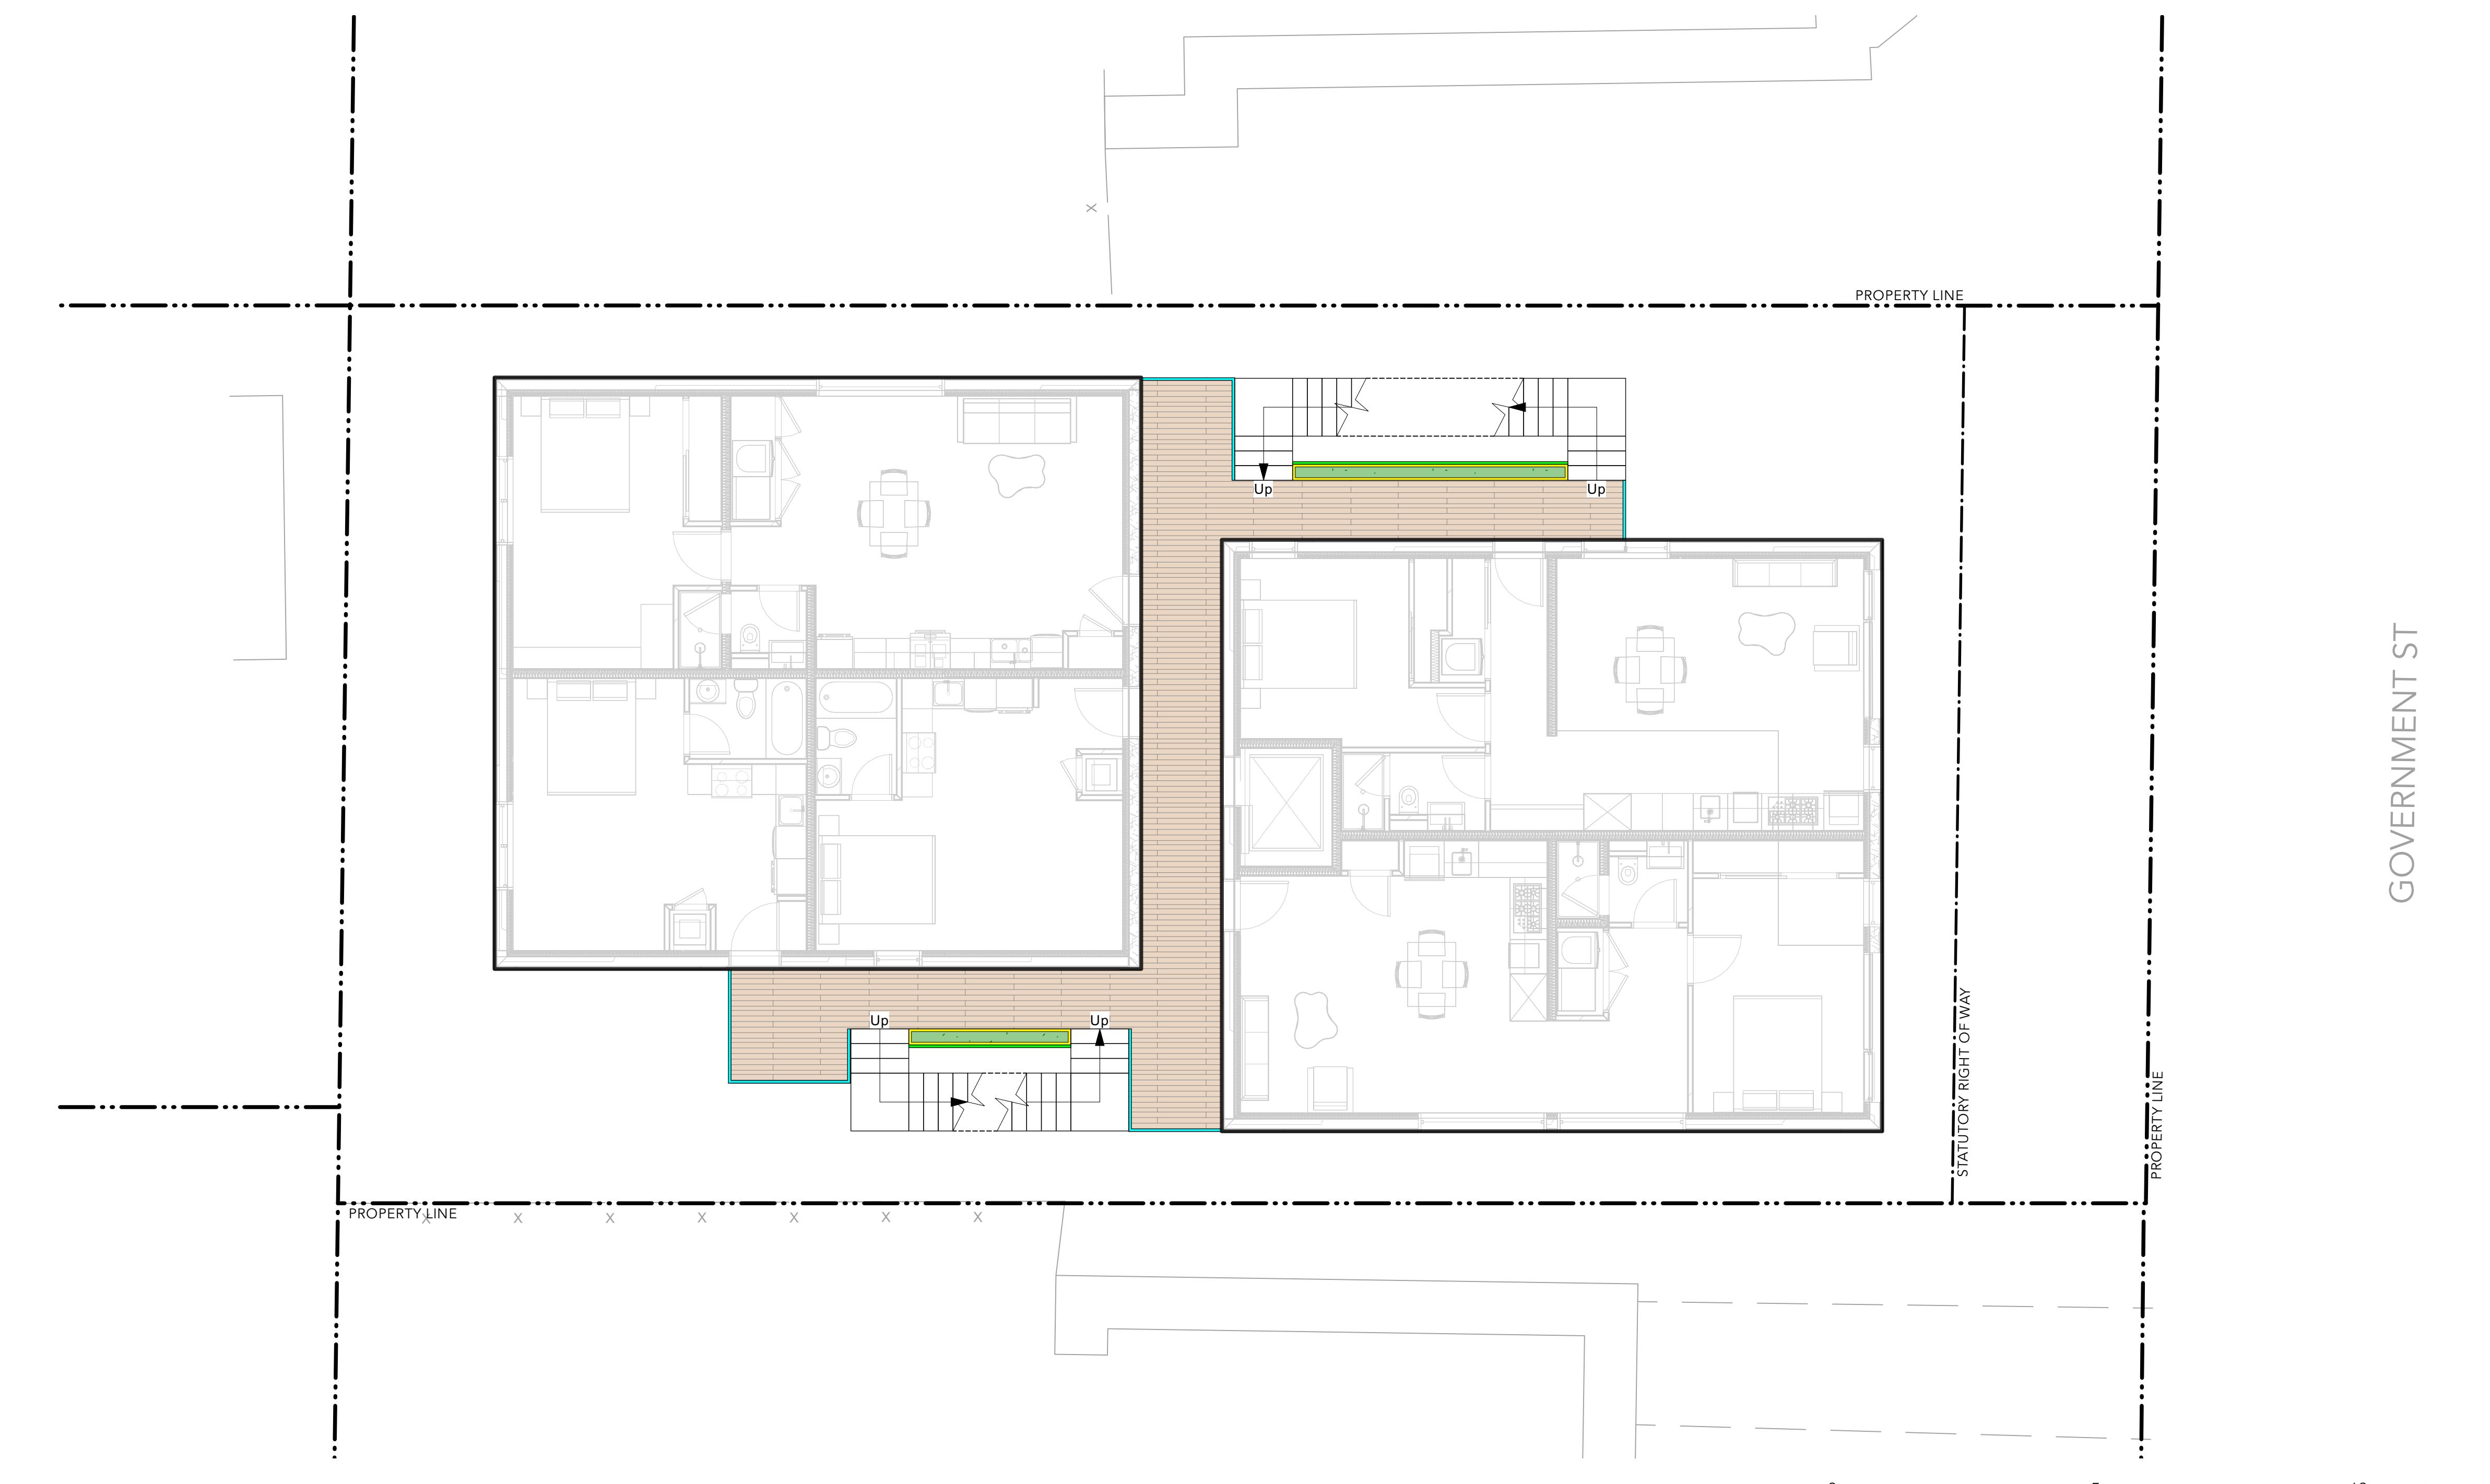

## GENERAL PLANTING NOTES:

1. ALL PLANTING SHALL BE IN ACCORDANCE WITH BC LANDSCAPE STANDARD, LATEST EDITION
2. ALL TREE AND SHRUB AREAS TO BE MULCHED WITH 50MM (2") OF MEDIUM FINE MULCH, LESS THAN 50MM (2") DIAMETER.
3. ROOTZONE TO REST ON TAMPED SOIL
4. SHRUBS: PREPARE PLANTING HOLES AS SPECIFIED. PLANT AT THE SAME GRADE AS NURSERY. WATER AND FERTILIZE AS SPECIFIED. ENSURE POSITIVE DRAINAGE THROUGHOUT PLANTING BED
5. TREE SIZE AND SPACING TO BE AS PER CITY OF VANCOUVER ARBORIST
6. TREE: PREPARE PLANTING HOLES AS SPECIFIED INSTALL TOP OF ROOTZONE 6" ABOVE FINISHED GRADE OF GROWING MEDIUM. WATER AND FERTILIZE AS SPECIFIED BY NURSERY.
7. FINAL SOFTSCAPE AND GRADING LAYOUTS AS WELL AS LOCATION SPACING TO BE APPROVED BY LANDSCAPE ARCHITECTS IN THE FIELD PRIOR TO INSTALLATION
8. IN CASE OF A DISCREPANCY BETWEEN PLANT INFORMATION ON THE LIST AND ON THE PLAN, THE LATTER SHALL PREVAIL
9. ALL PLANT MATERIAL TO BE MANUALLY WATERED FROM START OF INSTALLATION THROUGH THE END OF THE WARRANTY PERIOD
10. INSTALL TREE PROTECTION FENCING AROUND ALL EXISTING TREES TO CITY OF VANCOUVER STANDARDS. INSTALL TREE PROTECTION FENCING ON NEW PLANTING IF PHASED INSTALLATION IS REQUIRED.
11. FINAL PLANT SPACING, QUANTITY AND TREE PLACEMENT HAS BEEN REVIEWED TO THE SATISFACTION OF GENERAL MANAGER OF ENGINEERING SERVICES

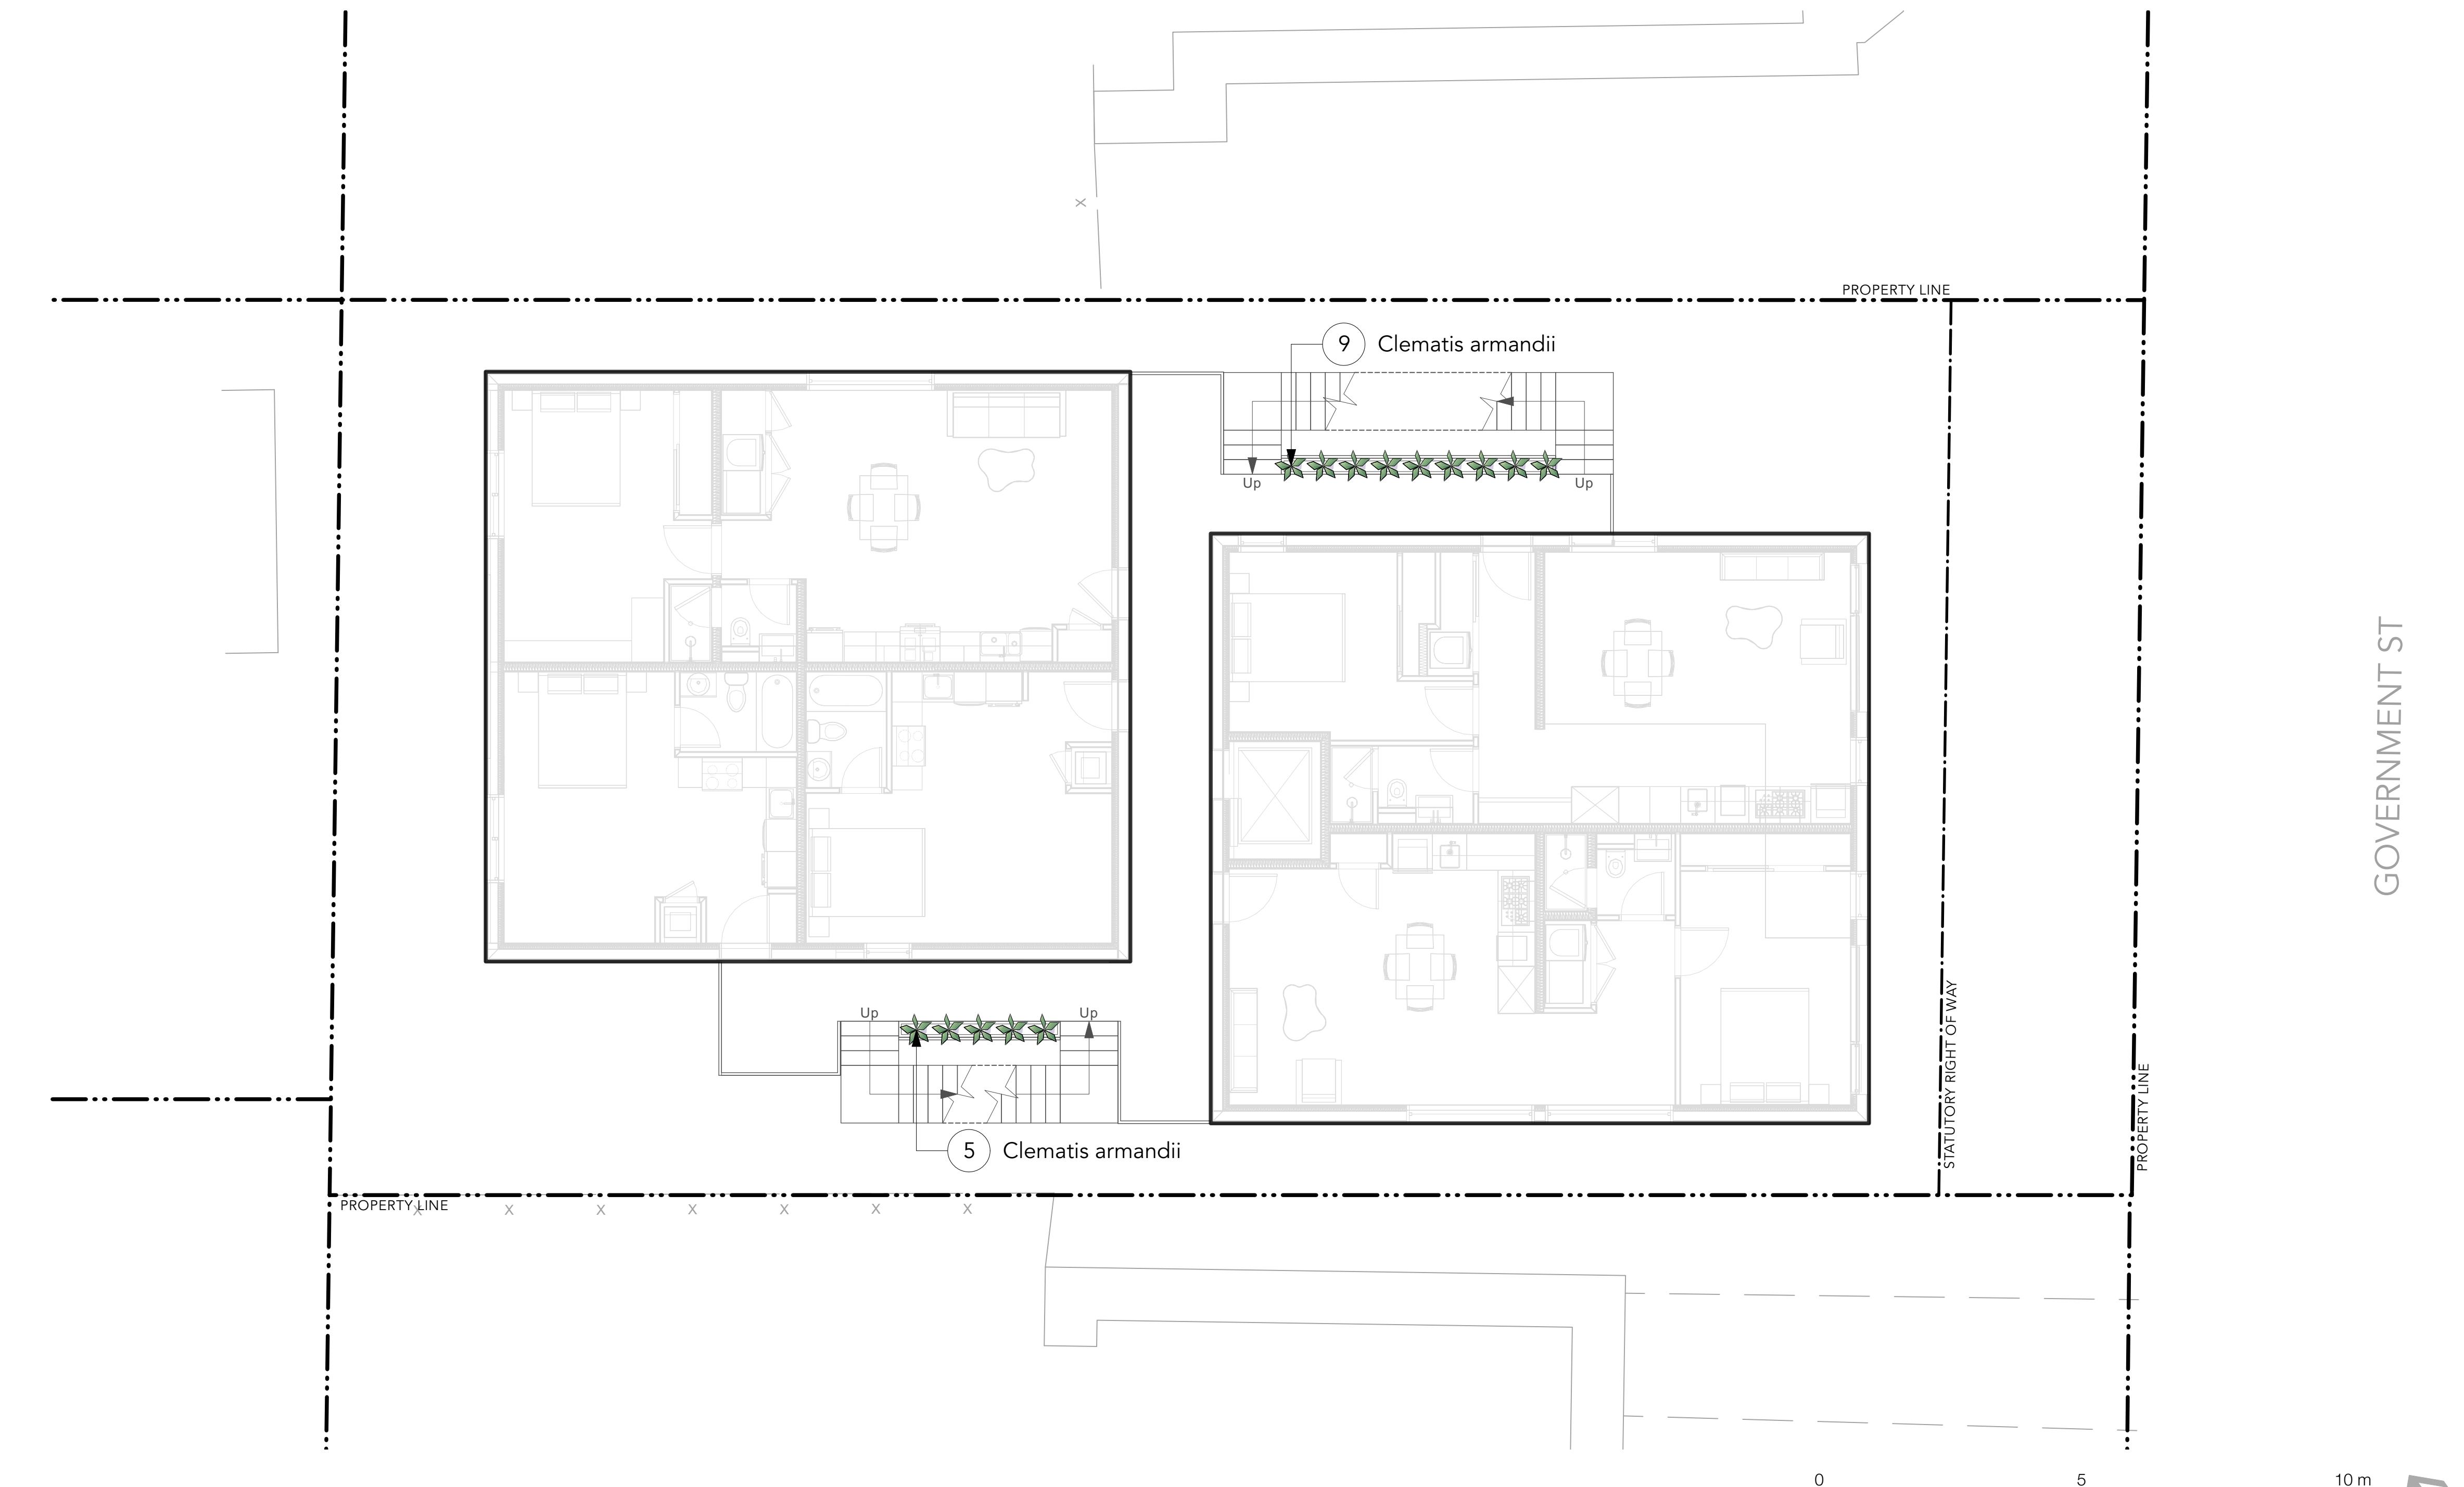


## GENERAL LAYOUT + MATERIALS NOTES:

1. ALL DIMENSIONS ARE METRIC UNLESS OTHERWISE NOTED. VERIFY ALL DIMENSIONS WITH FIELD CONDITIONS. REPORT ANY DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW AND RESPONSE.
2. ALL UTILITIES TO BE STAKED OUT BY CONTRACTOR AND PROTECTED FOR DURATION OF CONSTRUCTION PERIOD.
3. UNLESS OTHERWISE NOTED, PROVIDE A MINIMUM 2% SLOPE ON ALL HARD AND SOFT LANDSCAPE AREAS TO ENSURE POSITIVE DRAINAGE AWAY FROM BUILDINGS OR TO DRAINAGE STRUCTURES. MAXIMUM 3:1 SLOPE IN SOFT LANDSCAPE AREAS.
4. THE LAYOUT OF ALL HARDSCAPE ITEMS, SITE FURNISHINGS, BOULDERS, LANDSCAPE LIGHTING, PLANTING BEDS AND OTHER MATERIALS IS TO BE STAKED OUT BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
5. ALL SUBSTITUTIONS OF SPECIFIED MATERIALS TO BE APPROVED BY LANDSCAPE ARCHITECT.
6. THIS PLAN IS "NOT FOR CONSTRUCTION" AND IS TO BE SUBMITTED FOR REVIEW TO ENGINEERING SERVICES A MINIMUM OF 8 WEEKS PRIOR TO THE START OF ANY CONSTRUCTION PROPOSED FOR PUBLIC PROPERTY. NO WORK ON PUBLIC PROPERTY MAY BEGIN UNTIL SUCH PLANS RECEIVE "FOR CONSTRUCTION" APPROVAL AND RELATED PERMITS ARE ISSUED. PLEASE CONTACT ENGINEERING, DEVELOPMENT SERVICES AND/OR YOUR ENGINEERING, BUILDING SITE INSPECTOR FOR DETAILS.
7. MAINTENANCE AND IRRIGATION WILL BE PROVIDED TO ALL AREAS.

## MATERIALS LEGEND

SYMBOL	DESCRIPTION
	PAVING TYPE 2 Wood Deck
	METAL STAIRS See Arch for Details
	GUARDRAIL 3.5' High
	ROOF ABOVE
	FLOOR BELOW

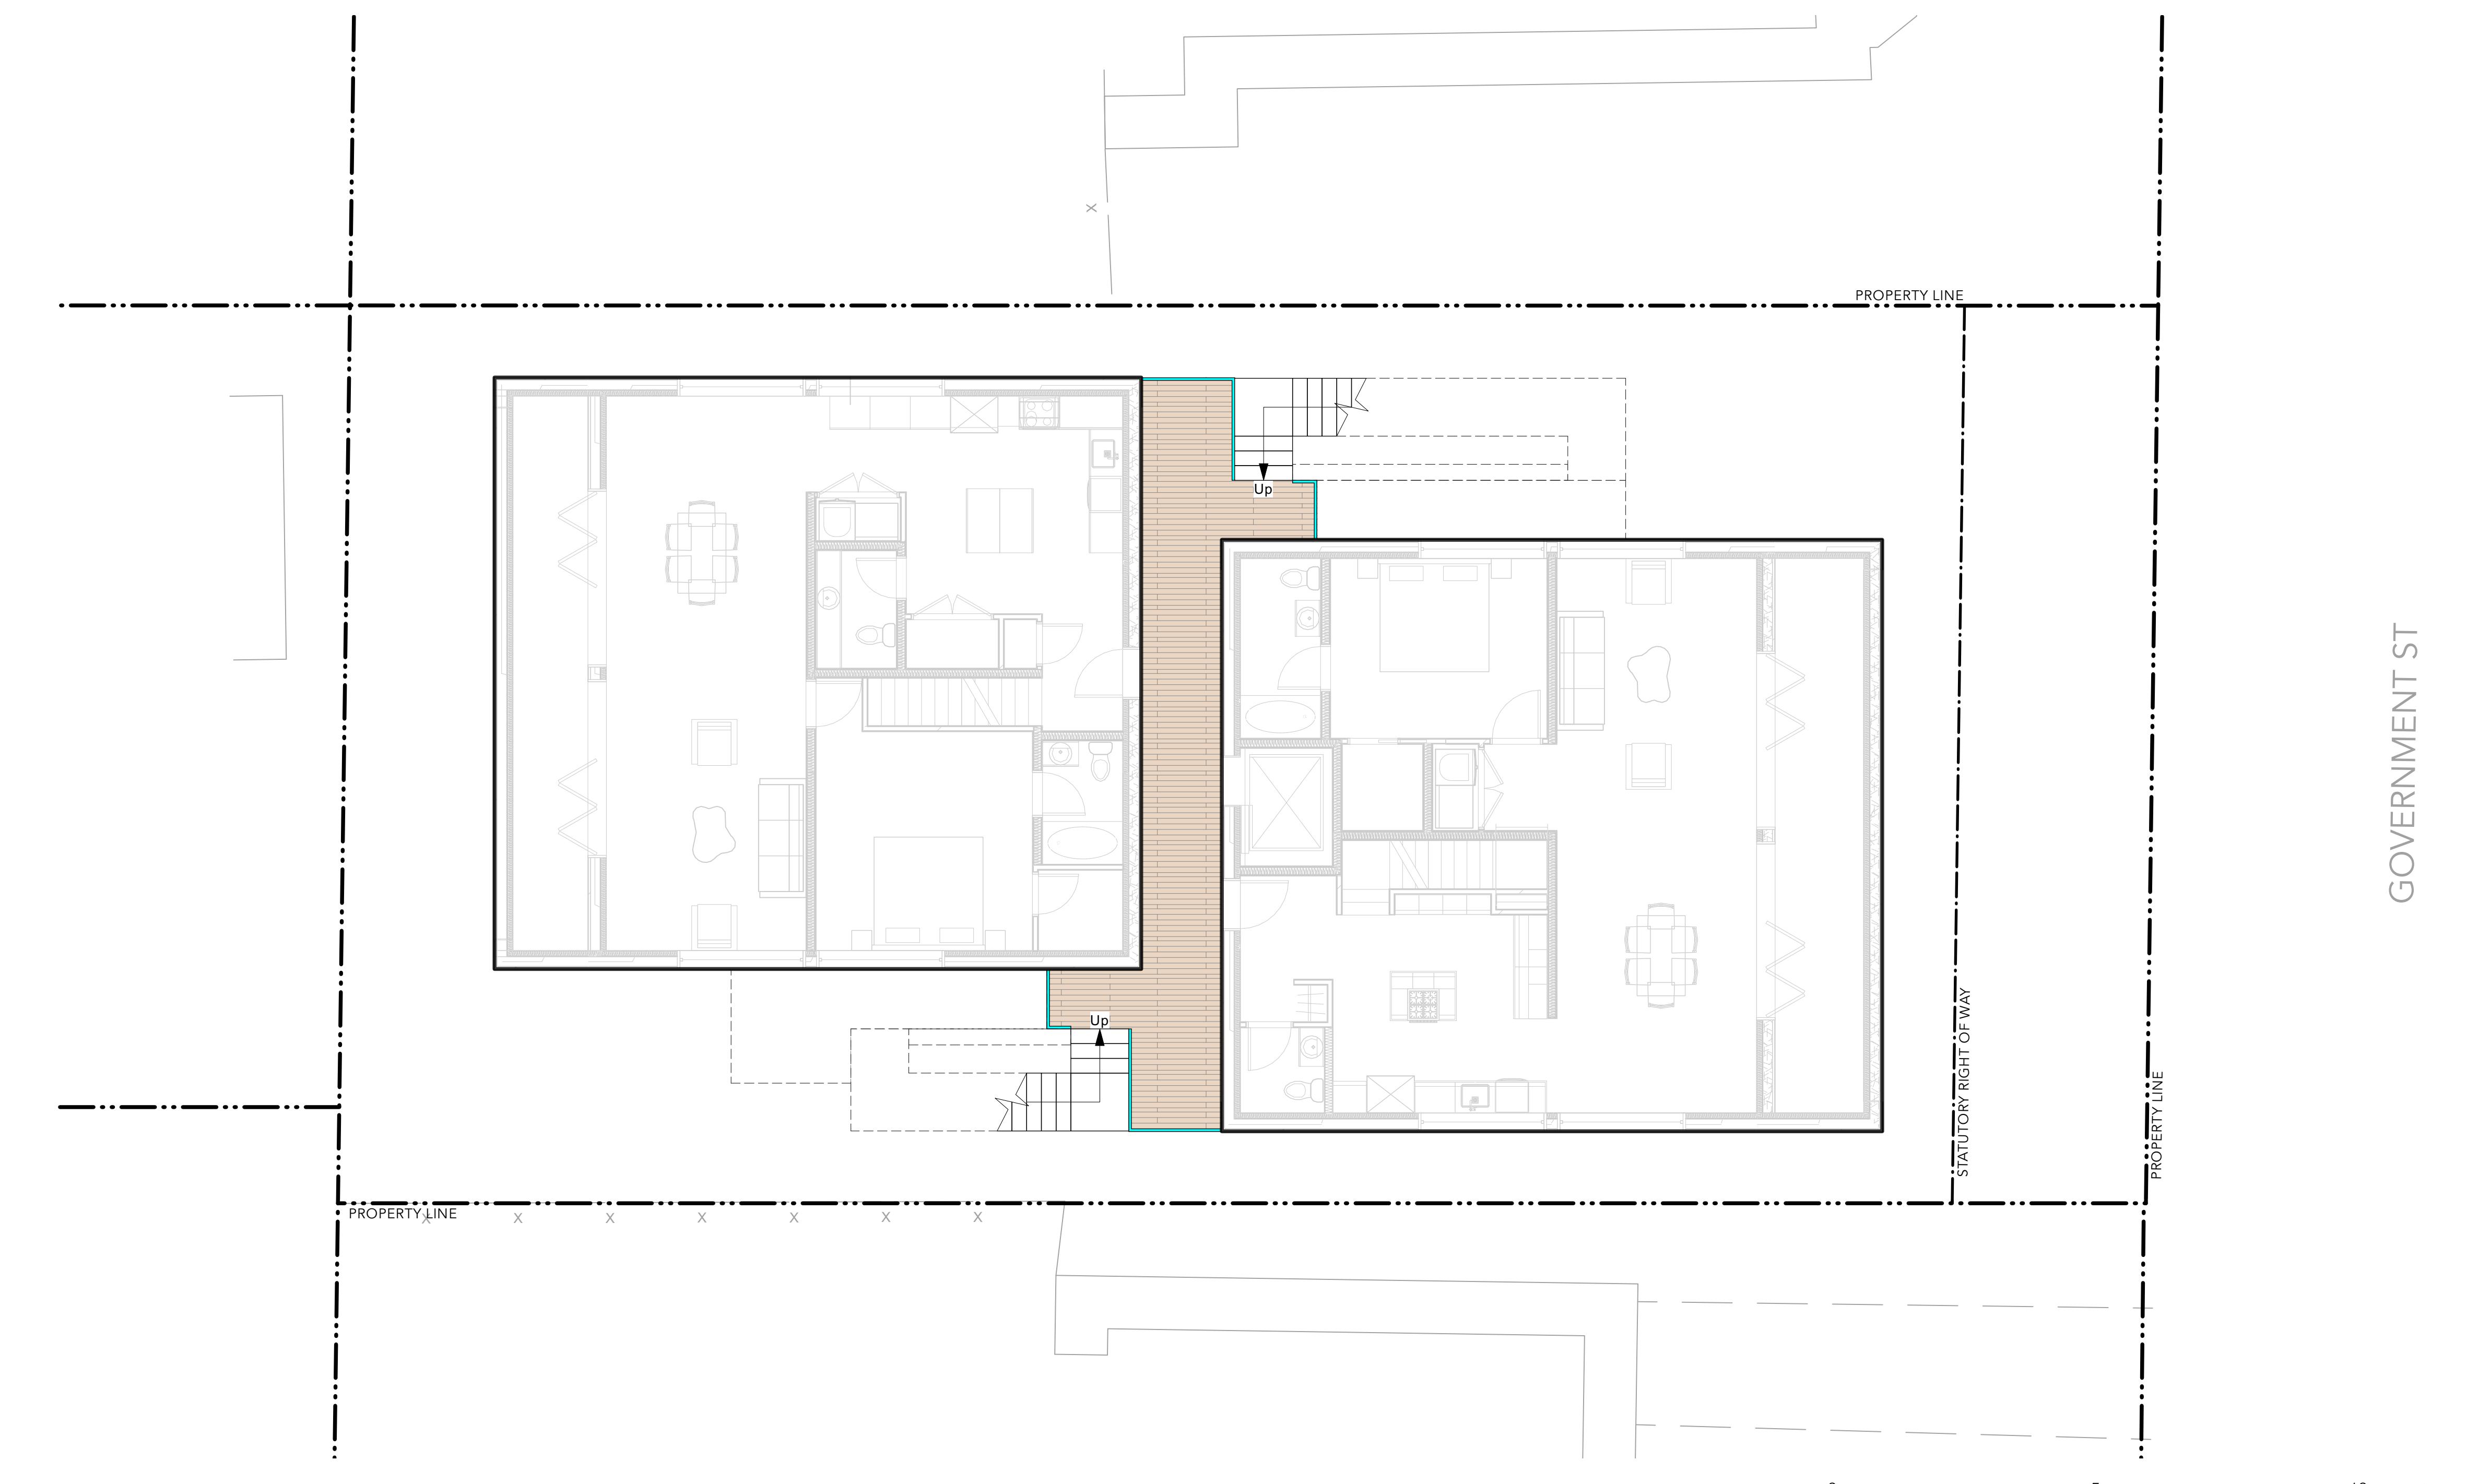

## OVERALL PLANT LIST

Symbol	Quantity	Latin Name	Common Name	Scheduled Size	Spacing	Notes
<b>DECIDUOUS TREES:</b>						
	2	<i>Oxydendrum arboreum</i>	Sourwood	6cm cal.	As Shown	B&B Specimen
	1	<i>Fagus sylvatica 'Riversii'</i>	European Beech	6cm cal.	As Shown	B&B Specimen
<b>SHRUBS:</b>						
	18	<i>Gaultheria shallon</i>	Salal	#1 Pot	1'6" o.c.	
	3	<i>Hydrangea Limetta</i>	Limetta Hydrangea	#3 Pot	3'0" o.c.	
	2	<i>Hydrangea macrophylla 'Hokomarevo'</i>	Everlasting Revolution Hydrangea	#3 Pot	2'6" o.c.	
	18	<i>Ilex crenata 'Sky Pencil'</i>	Japanese Holly	#2 Pot	2'0" o.c.	
	14	<i>Mahonia nervosa</i>	Longleaf Mahonia	#1 Pot	1'6" o.c.	
	27	<i>Maianthemum racemosum</i>	False Solomon's Seal	#1 Pot	1'0" o.c.	
	8	<i>Rosa nutkana</i>	Nootka Rose	#5 Pot	4'0" o.c.	
<b>PERENNIALS, GRASSES, GROUNDCOVER:</b>						
	16	<i>Adiantum pedatum</i>	American Maidenhair Fern	#2 Pot	1'6" o.c.	
	34	<i>Arctostaphylos uva-ursi</i>	Bearberry, Kinnikinnick	#1 Pot	1'0" o.c.	
	62	<i>Athyrium nipponicum 'Pictum'</i>	Japanese Painted Fern	#1 pot	1'0" o.c.	
	7	<i>Blechnum spicant</i>	Deer Fern	#2 Pot	2'0" o.c.	
	2	<i>Carex buchananii</i>	Fox Red Curly Sedge	#2 pot	2'6" o.c.	
	37	<i>Clematis armandii</i>	Evergreen Clematis	#1 Pot	2'0" o.c.	
	6	<i>Helictotrichon sempervirens</i>	Blue Oat Grass	#2 pot	2'0" o.c.	
	16	<i>Hosta sieboldiana 'Elegans'</i>	Blue Leaf Hosta	#1 Pot	2'0" o.c.	
	23	<i>Hosta x 'Blue Ice'</i>	Blue Ice Plantain Lily	#2 Pot	2'0" o.c.	
	15	<i>Iris sibirica</i>	Siberian Iris	#1 Pot	1'6" o.c.	
	18	<i>Pachysandra terminalis</i>	Japanese Spurge	#1 Pot	1'0" o.c.	
	20	<i>Polystichum munitum</i>	Western sword fern	#3 Pot	3'0" o.c.	

**NOTES:**

1. ALL PLANT MATERIAL AND LANDSCAPING PRACTICES SHALL BE COMPLIANT WITH THE LATEST EDITION OF THE BCLNA NURSERY STANDARD.
2. IN CASE OF DISCREPANCY BETWEEN PLANT INFORMATION ON THE LIST AND ON THE PLAN, THE LATTER SHALL PREVAIL.
3. FINAL SOFTSCAPE AND GRADING LAYOUTS AS WELL AS LOCATION AND SPACING TO BE APPROVED BY LANDSCAPE ARCHITECT IN THE FIELD PRIOR TO INSTALLATION.
4. ALL PLANT MATERIAL TO BE MANUALLY WATERED FROM START OF INSTALLATION THROUGH THE END OF THE WARRANTY PERIOD.
5. INSTALL TREE PROTECTION FENCING AROUND ALL EXISTING TREES TO CITY STANDARDS, INSTALL TREE PROTECTION FENCING ON NEW PLANTING IF PHASED INSTALLATION IS REQUIRED.
6. FINAL LOCATION, QUANTITY, TREE SPECIES TO THE SATISFACTION OF THE GENERAL MANAGER OF ENGINEERING.
7. NEW TREE MUST BE OF GOOD STANDARD, MINIMUM 6 CM CALIPER AND INSTALLED WITH APPROVED ROOT BARRIERS, TREE GUARDS AND APPROPRIATE SOIL.
8. ROOT BARRIERS SHALL BE 8'-0" (2.4M) LONG AND 18" (0.46M) DEEP PLANTING DEPTH OF ROOT BALL MUST BE BELOW SIDEWALK GRADE. NEW STREET TREES TO BE CONFIRMED PRIOR TO ISSUANCE OF THE BUILDING PERMIT.

- Food-bearing plant
- Plant for nesting
- BC native plant

## PLANT IMAGES

### TREES



Oxydendrum arboreum  
Sourwood

Fagus sylvatica 'Riversii'  
European Beech

### SHRUBS




Gautheria shallon  
Salal

Hydrangea limetta  
Limetta Hydrangea

Hydrangea macrophylla 'Hokomarevo'  
Everlasting Revolution Hydrangea

Ilex crenata 'Sky Pencil'  
Japanese Holly

### GROUNDCOVERS, GRASSES, FERNS, VINES, PERENNIALS

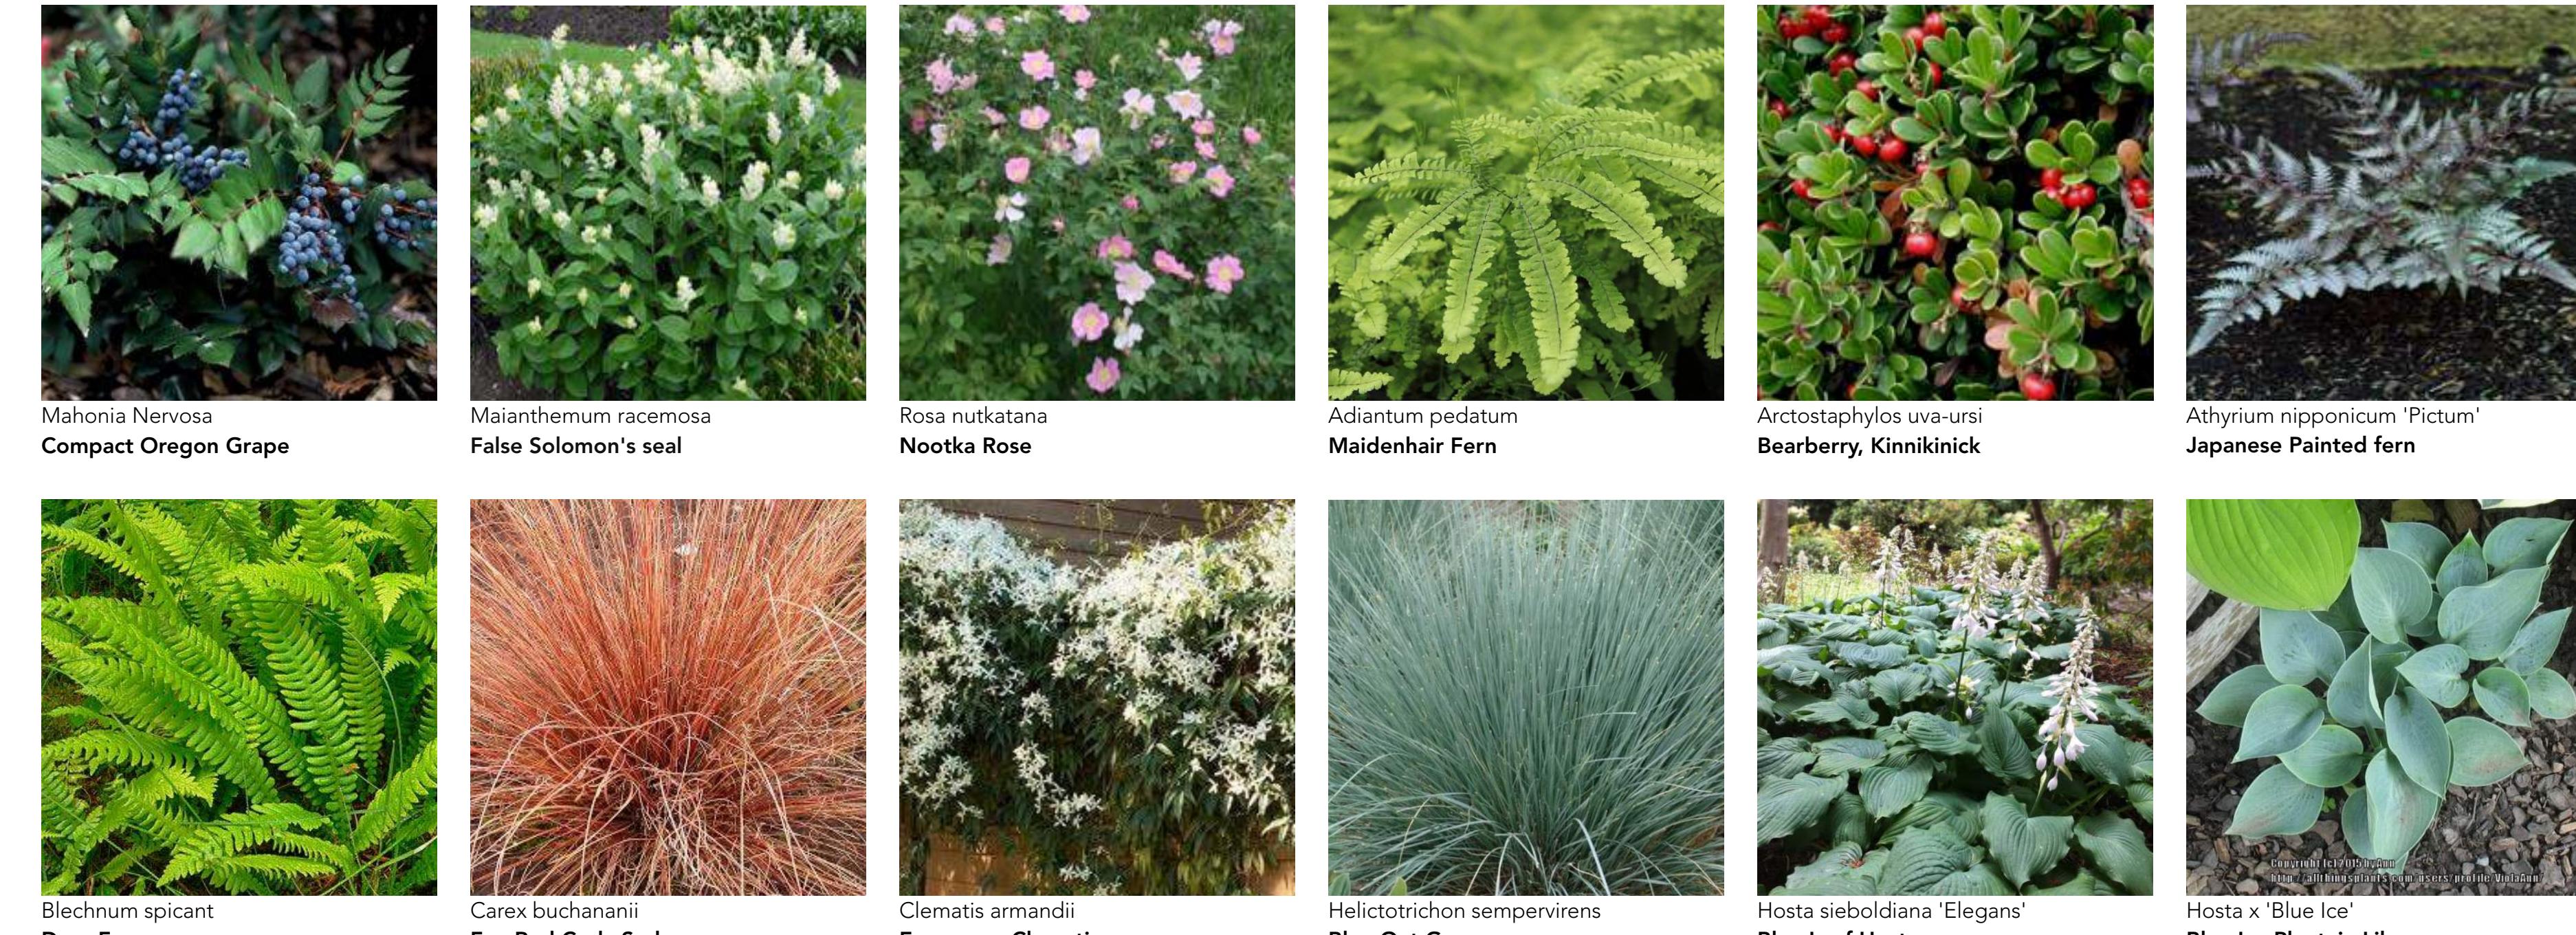

Blechnum spicant  
Deer Fern

Carex buchananii  
Fox Red Curly Sedge

Clematis armandii  
Evergreen Clematis

Helictotrichon sempervirens  
Blue Oat Grass

Hosta sieboldiana 'Elegans'  
Blue Leaf Hosta

Hosta x 'Blue Ice'  
Blue Ice Plantain Lily



Iris sibirica  
Siberian Iris

Pachysandra terminalis  
Japanese Spurge

Polystichum munitum  
Western Sword Fern

